NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/68P(NU)
20 May 2026
SUPERSEDING
MIL-DTL-3943/68N(NU)
29 February 2024

DETAIL SPECIFICATION SHEET

DECORATION, SUPERIOR CIVILIAN SERVICE AWARD, U.S. NAVY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

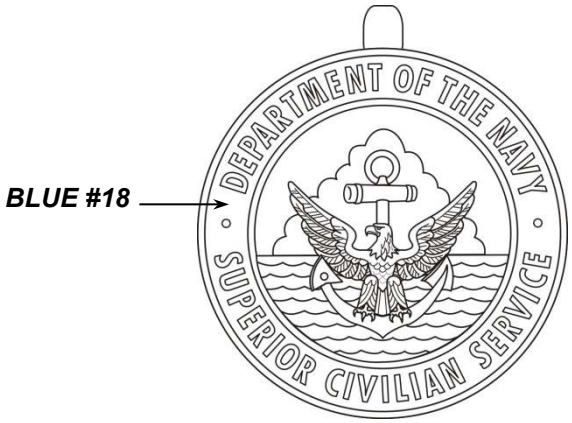

OBVERSE

DASH NUMBERS:
-1: Regular Size
-2: Miniature Size

MATERIAL (-1 and 2): Red Brass 85/15 (UNS Alloy No. C-230)

FINISH (-1 and -2): Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14. The pendant's reverse surface shall be made smooth for engraving.

DIMENSIONS:
HEIGHT (Including lug):
-1: 1-9/16 inches (REF)
-2: 23/32 inch (REF)
WIDTH:
-1: 1-3/8 inches (REF)
-2: 5/8 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:15Z
Check the source to verify that this is the current version before use.

THICKNESS:
-1 (at center): 0.095 inch ± 0.005 inch
-2 (at edge): 0.078 inch ± 0.005 inch

DECORATION SET AND PRESENTATION CASE: The decoration set shall consist of a regular size medal, a miniature size medal, a service ribbon and a lapel button, all packaged in a presentation case conforming to the latest version of MIL-DTL-14633, Type I, with a Class 2 pad.

EPOXY (-1 and -2): Epoxy shall be applied to the obverse of the pendant as indicated above and as specified below, and shall match TIOH Hard Enamel Color Chip Number listed. Hard cloisonné enamel may be used in lieu of epoxy.

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATIONS (OBVERSE ONLY)
Blue #18	Designation Band

PACKAGING: The use of any type of plastic packaging material shall be prohibited.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The specification slash sheet for the pendant drape and service ribbon is MIL-DTL-11589/174.

3. The specification slash sheet for the lapel button for the U.S. Navy is MIL-DTL-11484/38.

4. The specification slash sheet for the lapel button for the U.S. Marine Corps is MIL-DTL-11484/37.

5. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:15Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - NU

Preparing activity
Navy - NU

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-2026-279)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:15Z
Check the source to verify that this is the current version before use.