MILITARY SPECIFICATION

PACKAGING OF MOUNTS, PERISCOPE T176, T176E1, T176E2, T177, T177E1 AND T177E2

1. SCOPE

1.1 This specification covers the packaging, packing and marking for domestic shipment and storage, overseas shipment and interplant shipment of the following periscope mounts, and is applicable to similar mounts not listed:

Periscope Mount T176	Periscope Mount T177
Periscope Mount T176E1	Periscope Mount T177E1
Periscope Mount T176E2	Periscope Mount T177E2

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS AND PUBLICATIONS

2.1 The following specifications and standard of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

FF-B-571	-	Bolts; Nuts; Studs; And Tap Rivets (And Material For Same).
NN-B-601	-	Boxes, Wood-Cleated-Plywood, For Domestic Shipment.
NN-B-621	-	Boxes, Wood, Nailed and Lock Corner.
UU-C-843	-	Cushioning Materials, Cellulosic.
UU-T-111	-	Tape, Paper, Gummed (Kraft).
LLL-B-631	-	Boxes; Fiber, Corrugated (For Domestic Shipment).
LLL-B-636	-	Boxes; Fiber, Solid (For Domestic Shipment).
LLL-F-291	-	Fiberboard, Corrugated, Single Face (Flexible).

Military

MIL-A-101	-	Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.
JAN-P-105	-	Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:48Z
Check the source to verify that this is the current version before use.

Reference	Full Identification
Greaseproof barrier material	Type II or III, grade C, class 1 of Specification JAN-B-121
Gummed tape	Class 1 or 2 of Specification UU-T-111
Preservative (Compound)	Class 3 of Specification MIL-C-11796
Preservative (Oil)	Specification MIL-L-3150
Pressure sensitive tape	Any type and grade of Specification JAN-P-127

3.2 Disassembly and cleaning

3.2.1 Disassembly - The headrest assembly and signal light assembly shall be removed from the mount. The connector assembly on Periscope Mounts T177, T177E1 and T177E2 shall be disassembled from the mount where the rod joins the upper connector as shown in Figure 1.

3.2.2 Cleaning - The exterior surfaces of each periscope mount shall be cleaned so as to be free from dirt, smudges, fingerprints and other foreign substances in accordance with cleaning methods C-1 and C-4 of Specification MIL-P-116. Cleaning method C-4 shall be used to clean all critical unprotected metal surfaces such as mounting surfaces.

3.3 Packaging

3.3.1 Prepackaging - **(See figures 4 and 5 for prepackaging the mount.)**

3.3.1.1 Headrest assembly - Preservative(oil) shall be applied on the mounting hardware (screws and washers). The hardware shall then be placed in a greaseproof bag which shall be secured to the support of the headrest assembly with pressure sensitive tape. The support shall then be wrapped with either cellulosic cushioning material or flexible single face corrugated fiberboard. The headrest assembly shall then be placed in a waterproof bag conforming to type I, grade A, class b of Specification JAN-P-117. The bag shall be closed by heat sealing the opening shut. The bagged headrest assembly shall be immobilized in a fiberboard box conforming to any compliance symbol and any style, except FCT, of Specification JAN-P-108. The box shall be closed by applying water-resistant adhesive over all areas of contact on the flaps and covering all seams, including the manufacturer's joint, with water-resistant pressure sensitive tape. The adhesive shall conform to Specification MIL-A-101 and the tape shall conform to type II or III, grade A or B (at least 2 inches wide) of Specification JAN-P-127.

3.3.1.2 Signal light assembly - Preservative (oil) shall be applied on the mounting hardware (screws and washers). The hardware shall then be placed in a greaseproof bag which shall be secured to the signal light assembly with pressure sensitive

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:48Z
Check the source to verify that this is the current version before use.

The wrapped rod and lower connector shall be secured to the wood base.

3.4 Packing - (See figure 6 for packing the mount.)

3.4.1 For domestic shipment and storage and overseas shipment

3.4.1.1 The wood base containing the mount and the box containing the headrest shall be placed in a shipping container conforming to either of the following specifications:

JAN-P-105, Style A or B. Plywood shall conform to type A or B, condition I of Specification JAN-P-139.

JAN-P-106, Style 2 or 4. Minimum thickness of lumber for sides, top and bottom shall be 11/16 inch, when shipment is to be made by an ocean going vessel.

3.4.1.2 Size and weight of packed shipping container

Inside dimensions	- 16 " long x 14-3/4" wide x 10 " deep
Cubage	- 2.2 cubic feet
Gross weight	- 55 pounds

3.4.1.3 The steel straps shall not be stapled on the shipping container for domestic shipment and storage.

3.4.2 Immobilizing - The wood base shall fit snugly in the shipping container and shall be immobilized by nailing a hold down cleat in each corner of the container as shown in figure 6.

3.5 Identification and marking

3.5.1 In addition to other markings that may be required (see 6.2), the information to be placed on each container shall be in accordance with Standard MIL-STD-129. The information shall be stencilled or printed on the container. The serial number shall be included in the identification data. (See 6.3 for the stock number to be added in the identification data.)

3.5.2 Official Ordnance Corps Inspection Seal (Escutcheon) Either a paper seal or a stamped escutcheon shall be placed adjacent to the permanent markings on each shipping container. The Ordnance District's symbol, such as NYOD, BOD, etc., shall be added on each paper seal or adjacent to each stamped escutcheon. If paper seals are used, they shall be affixed and coated with water-resistant label adhesive conforming to Specification AXS-1472.

3.6 Interplant shipment requirements - Where an interplant shipment is involved, the following cleaning, packaging, packing and marking requirements shall apply:

3.6.1 Cleaning - Cleaning shall be in accordance with 3.2.2. The signal light assembly shall not be removed from the mount.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:48Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data - Invitation for bids and contracts or orders should specify the title, number and date of this specification, the type of shipment involved and type of packaging and packing required.

6.2 The marking of overseas shipping containers by Army Installations should be in accordance with Department of the Army and Air Force Manual SR 746-30-5, "Marking of Oversea Supply".

6.3 The following indicates the stock number for each mount which is to be added in the identification data:

Periscope Mount T176	F001-7652074
Periscope Mount T176E1	F001-7652160
Periscope Mount T176E2	F001-7652075
Periscope Mount T177	F001-7652069
Periscope Mount T177E1	F001-7652070
Periscope Mount T177E2	F001-7652161

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:48Z
Check the source to verify that this is the current version before use.



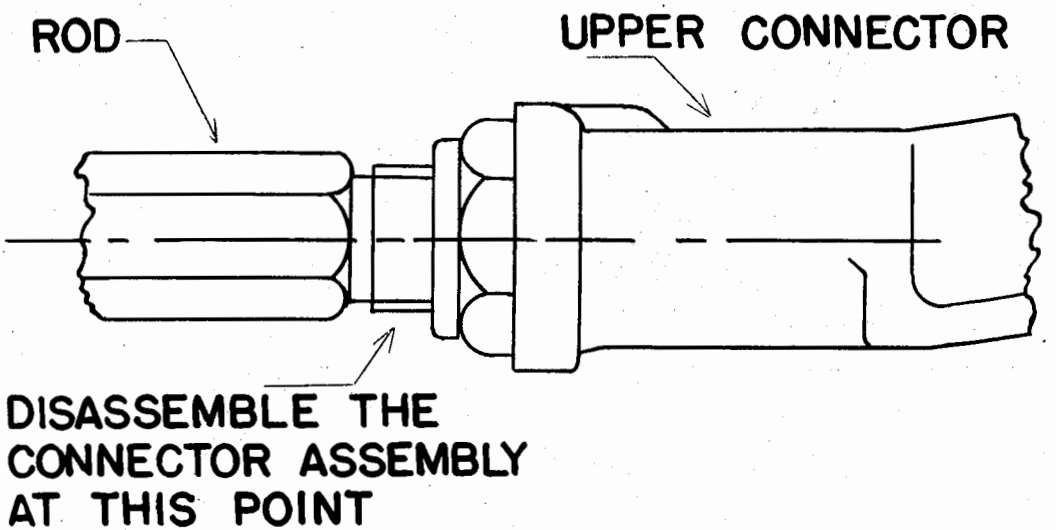


FIGURE 1

NEG. #22983-1 9/16/52 FRANKFORD ARSENAL ORD. CORPS


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:48Z
Check the source to verify that this is the current version before use.

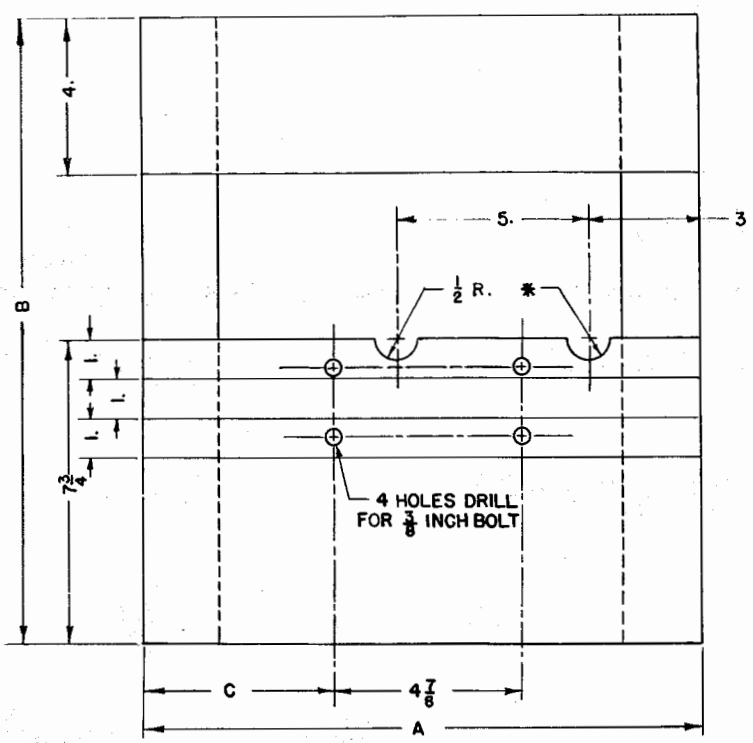

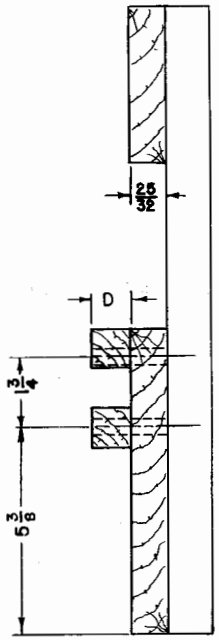

*CUT-OUTS SHALL BE ELIMINATED FOR PERISCOPE MOUNT T177 SERIES


ITEM	A	B	C	D
PERISCOPE MOUNTS T176, T176E1, T176E2	14 1/2	16	5	1 1/8
PERISCOPE MOUNTS T177, T177E1, T177E2	19 1/2	16	10	25/32

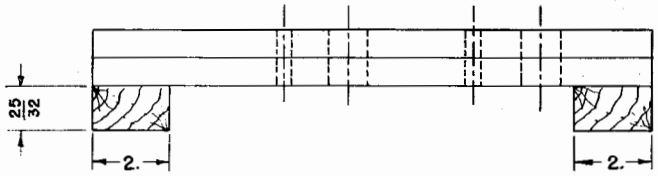



BASE FOR PERISCOPE MOUNTS
T176 T177 SERIES

FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:48Z
Check the source to verify that this is the current version before use.

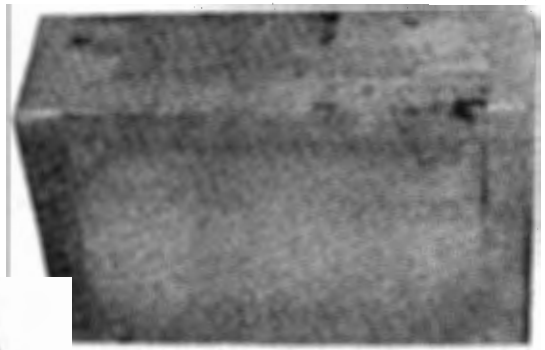

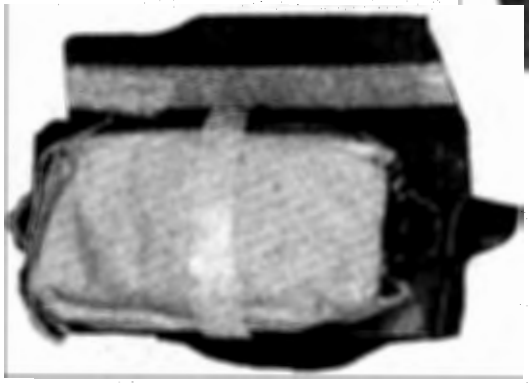

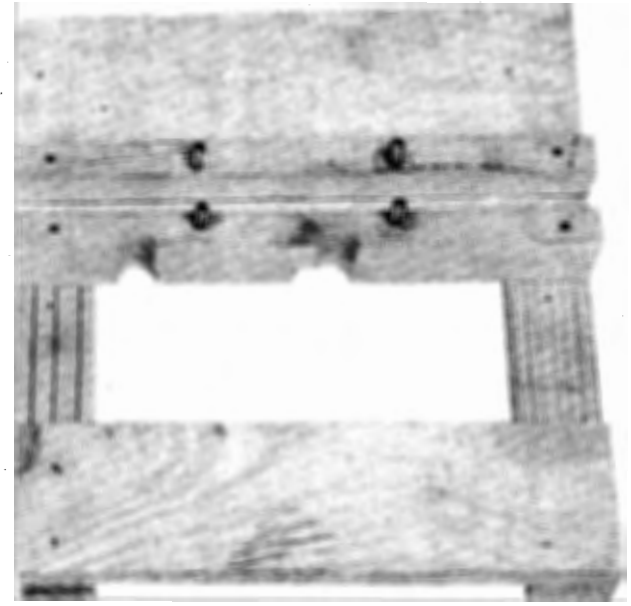



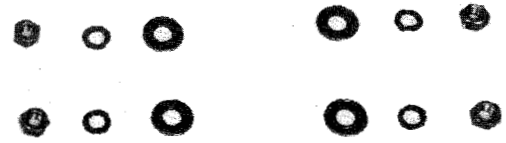

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:48Z
Check the source to verify that this is the current version before use.

NEG. #22983-5 9/16/52 FRANKFORD ARSENAL ORD. CORPS

MOUNT, PERISCOPE, T176 W/E - Periscope mount W/E prior to mounting on the wood base.
FIGURE 5