INCH-POUND

MIL-DTL-32385/3A
04 February 2020
SUPERSEDING
MIL-DTL-32385/3
14 July 2011

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, CENTER CONTACT POSITIVE, ISOLATED GROUND TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet, MIL-DTL-32385, and QPL-32385.

INTENDED USE:

1. The connectors covered by this specification sheet are intended for use on control and instrument panels for aircraft, ground, and shipboard applications.

REQUIREMENTS:

1. Material: Material shall be in accordance with MIL-DTL-32385.

2. Finish: Finish shall be in accordance with MIL-DTL-32385.

3. Design and construction: Design, construction and physical dimensions shall be in accordance with MIL-DTL-32385 and as specified herein (see figures 1 and 2).

EXAMINATION AND TESTS:

1. Examination and tests shall be in accordance with MIL-DTL-32385.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. The part or identifying number (PIN) consists of retaining the previous MS number "MS90335" followed by a sequentially assigned dash number as specified in table I.

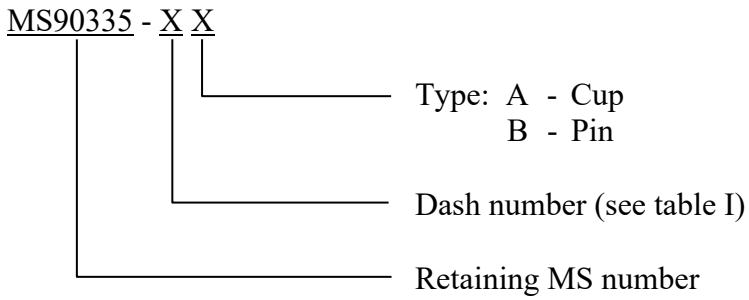


TABLE I. Dash number PIN cross-reference data.

Dash number [1]	Type	MS90335D PIN	MIL-DTL-32385/3 PIN
-5	A	N/A [2]	MS90335-5A
-5	B	MS90335-5	MS90335-5B

[1] See figures 1 and 2.
[2] MS90335-5 had an alternative center connector option added that was not previously identified in MS90335D (see note 8).

2. This specification supersedes MS90335D, dated 5 January 1996.

3. Interpret all figures in accordance with ASME Y14.5.

4. The manufacturer's identification mark shall be permanently stamped in the metal part of the connectors.

5. The current loading of the connectors is limited to the current-carrying capacity of the wire used in the associated interconnecting cabling.


6. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence.

7. Unless otherwise specified, issues of reference documents are those in effect at the time of solicitation.

8. Interchangeability relationship: MS90335-5 and MIL-DTL-32385/3-5A and -5B parts are universally, functionally and dimensionally interchangeable. MS90335-5 had not identified an existing option for second center contact type with dash numbers. Users must determine whether the MS90335-5 employed a cup or a pin type center contact.

9. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:11Z
Check the source to verify that this is the current version before use.

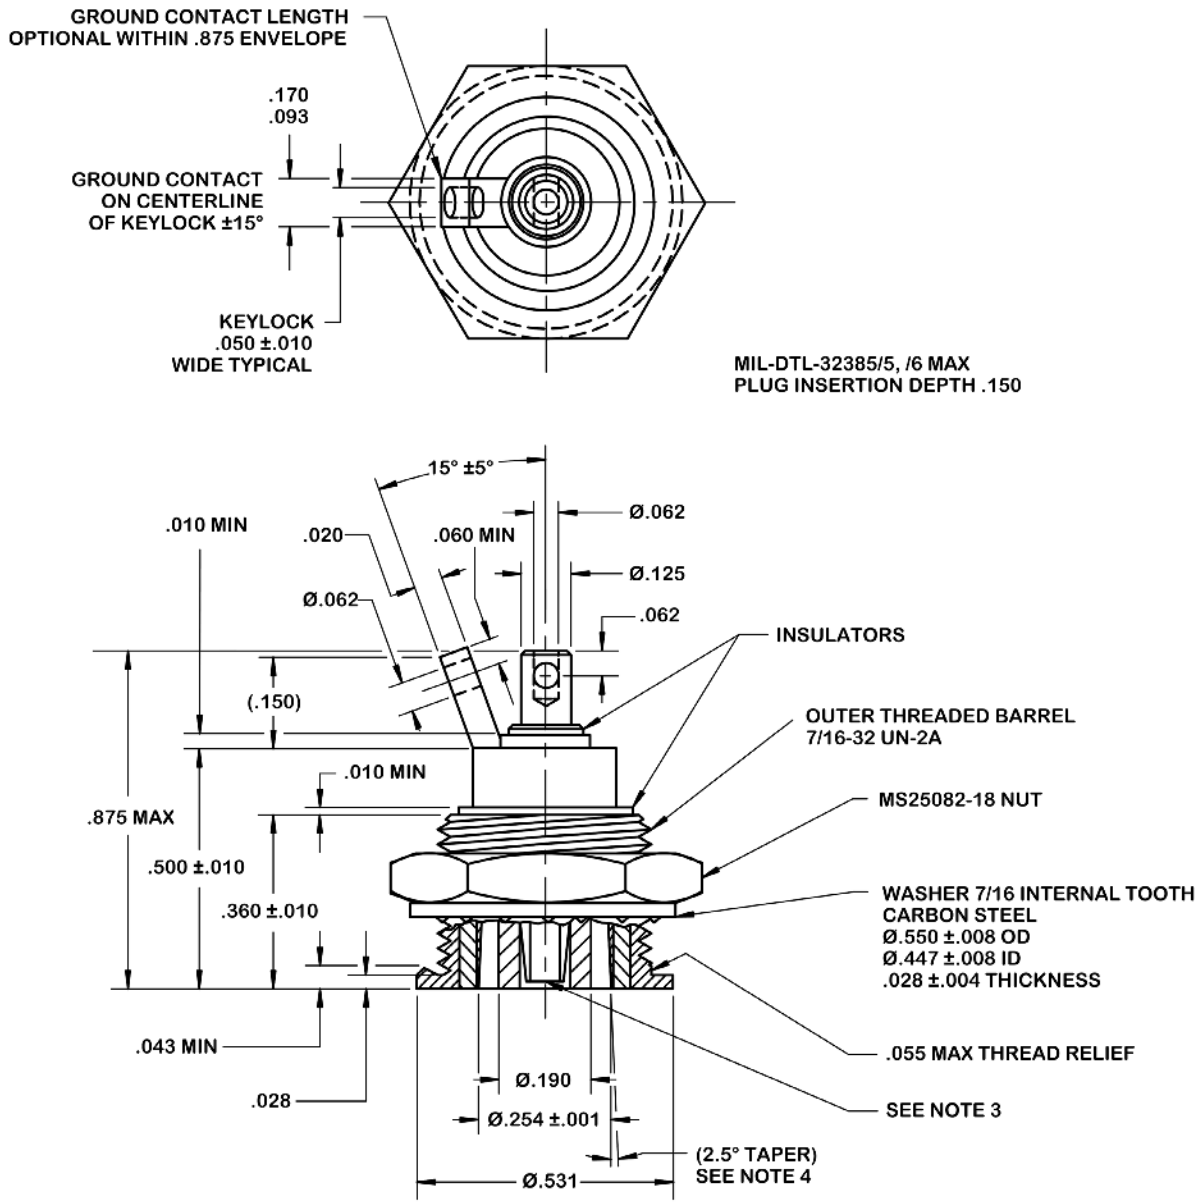

NOTES:
1. All dimensions are in inches.
2. Tolerances: Dimensions ±0.005 unless otherwise specified.
3. Female center contact fingers closed down uniformly to meet 4 ounces minimum withdrawal force with 0.079 diameter test pin before and after 3 insertions of a 0.082 diameter oversize pin.
4. Angular dimension of 2.5 degrees.
5. When mated with MIL-DTL-32385/5, or /6 plug that has been inserted to a depth of 0.140 ± 0.005 inch, the connector shall have a minimum withdrawal force of 3 pounds of force (lbf) and a maximum withdrawal force of 10 lbf.

FIGURE 1. Connector, receptacle, center cup contact positive, isolated ground type, for -5A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:11Z
Check the source to verify that this is the current version before use.

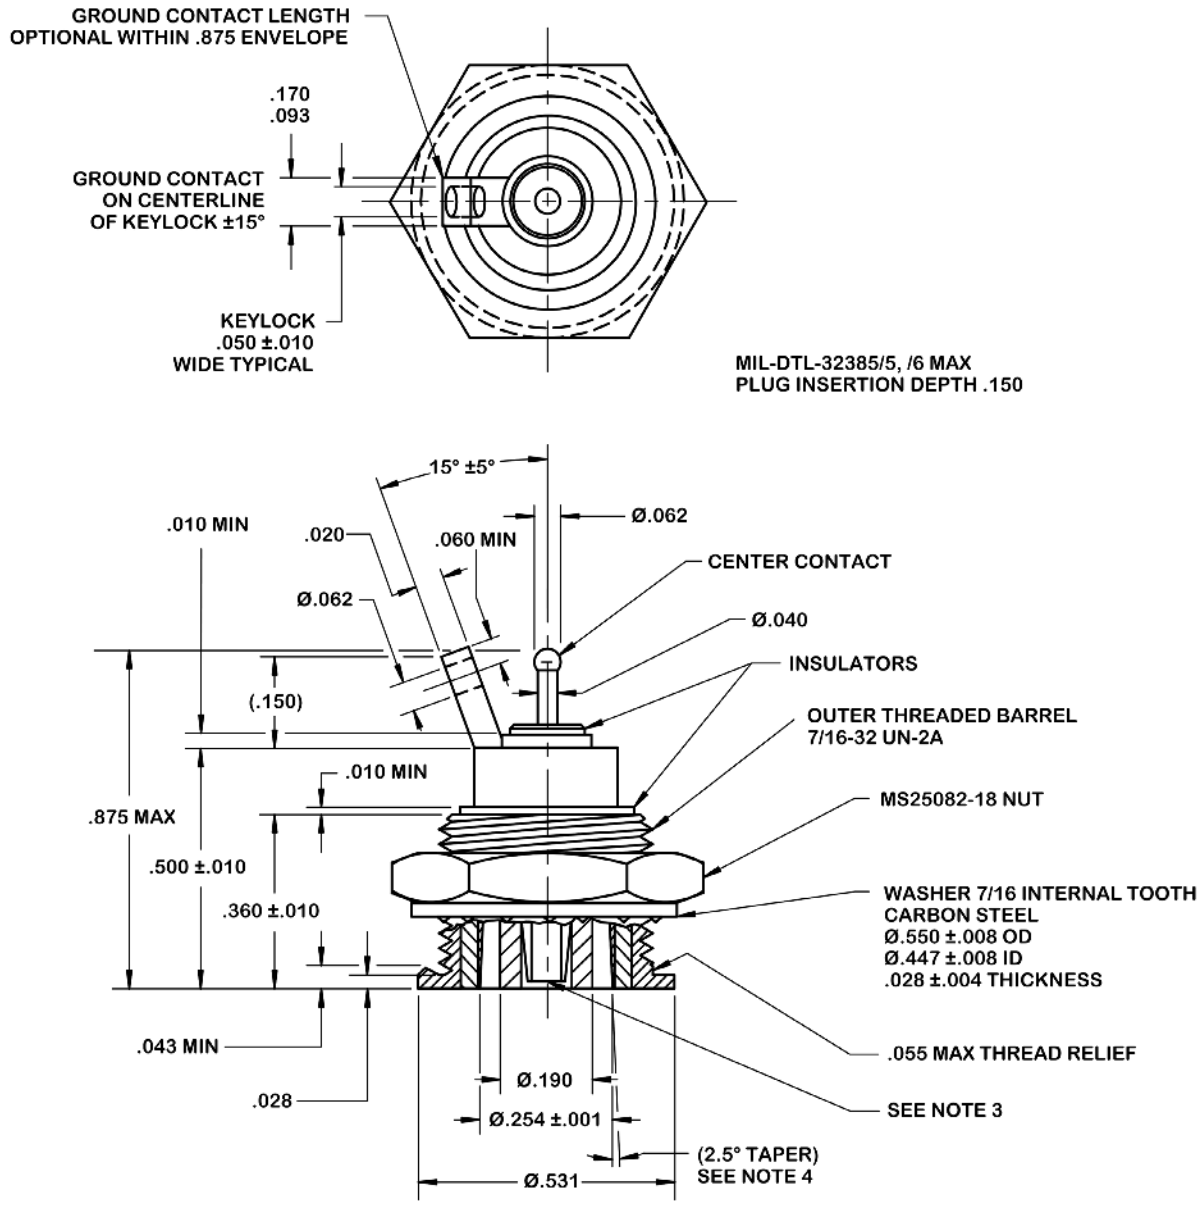

NOTES:
1. All dimensions are in inches.
2. Tolerances: Dimensions ±0.005 unless otherwise specified.
3. Female center contact fingers closed down uniformly to meet 4 ounces minimum withdrawal force with 0.079 diameter test pin before and after 3 insertions of a 0.082 diameter oversize pin.
4. Angular dimension of 2.5 degrees.
5. When mated with MIL-DTL-32385/5, or /6 plug that has been inserted to a depth of 0.140 ± 0.005 inch, the connector shall have a minimum withdrawal force of 3 pounds of force (lbf) and a maximum withdrawal force of 10 lbf.

FIGURE 2. Connector, receptacle, center pin contact positive, isolated ground type, for -5B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:11Z
Check the source to verify that this is the current version before use.

APPENDIX A

3D Model for reference only.

NOTE: A yellow message bar appears that says “3D content has been disabled. Enable this feature if you trust this document”. Select one of the options listed on the Options button to either ‘Trust this document one time only’ or ‘Trust this document always’. For additional information on how to enable 3D content in PDF please visit https://helpx.adobe.com/acrobat/using/enable-3d-content-pdf.html

3D MODEL A-1. Connector, receptacle, center cup contact positive, isolated ground type, for -5A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:11Z
Check the source to verify that this is the current version before use.

APPENDIX A

3D Model for reference only.

NOTE: A yellow message bar appears that says “3D content has been disabled. Enable this feature if you trust this document”. Select one of the options listed on the Options button to either ‘Trust this document one time only’ or ‘Trust this document always’. For additional information on how to enable 3D content in PDF please visit https://helpx.adobe.com/acrobat/using/enable-3d-content-pdf.html

3D MODEL A-2. Connector, receptacle, center pin contact positive, isolated ground type, for -5B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:11Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 85
DLA - GS

Review Activities:
Navy - MC, SH

Preparing Activity:
DLA - GS8

(Project 5935-2019-026)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:11Z
Check the source to verify that this is the current version before use.