INCH-POUND

MIL-DTL-32385/6B
31 March 2025
SUPERSEDING
MIL-DTL-32385/6A
04 February 2020

DETAIL SPECIFICATION SHEET

CONNECTOR, PLUG, CENTER CONTACT POSITIVE, PRINTED CIRCUIT BOARD APPLICATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet, MIL-DTL-32385, and QPL-32385.

INTENDED USE:

1. The connector covered by this specification sheet is intended for use on control and instrument panels for aircraft, ground, and shipboard applications.

REQUIREMENTS:

1. Material: Material shall be in accordance with MIL-DTL-32385.

2. Finish: Finish shall be in accordance with MIL-DTL-32385.

3. Design and construction: Design, construction and physical dimensions shall be in accordance with MIL-DTL-32385 and as specified herein (see figure 1).

EXAMINATION AND TESTS:

1. Examination and tests shall be in accordance with MIL-DTL-32385.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. The part or identifying number (PIN) consists of retaining the previous MS number "MS90335" followed by a sequentially assigned dash number as specified in table I.

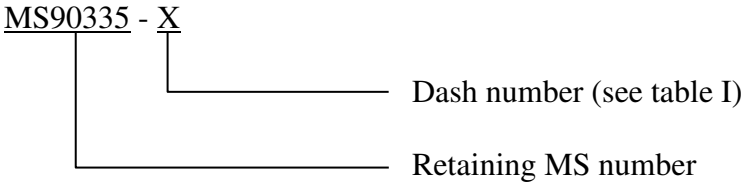


TABLE I. Dash number PIN cross-reference data.

Dash number	MS90335D PIN	MIL-DTL-32385/6 PIN
-8	MS90335-8	MS90335-8

2. This specification supersedes MS90335D, dated 5 January 1996.

3. Interpret figure 1 in accordance with ASME Y14.5.

4. Collar shall have a minimum of four slots and a maximum of six slots.

5. All four contacts should be fully soldered to a printed circuit board when installed onto panel. Variations in solder tab size, 0.126 - 0.280 inch, are intended to allow for space limitations. The larger tab shown on figure 1 is preferred and should be incorporated into new designs when practical.

6. An optional construction plug collar that screws into the base may be offered, providing mating interface dimensions are maintained. Final part assembly shall be performed using a conductive cement and shall maintain 0.130 - 0.135 inch insertion depth into female receptacle.

7. The current loading of the connectors is limited to the current-carrying capacity of the wire used in the associated interconnecting cabling.


8. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence.

9. Unless otherwise specified, issues of reference documents are those in effect at the time of solicitation.

10. Interchangeability relationship: MS90335-8 and MIL-DTL-32385/6 parts are universally, functionally and dimensionally interchangeable.

11. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:12Z
Check the source to verify that this is the current version before use.

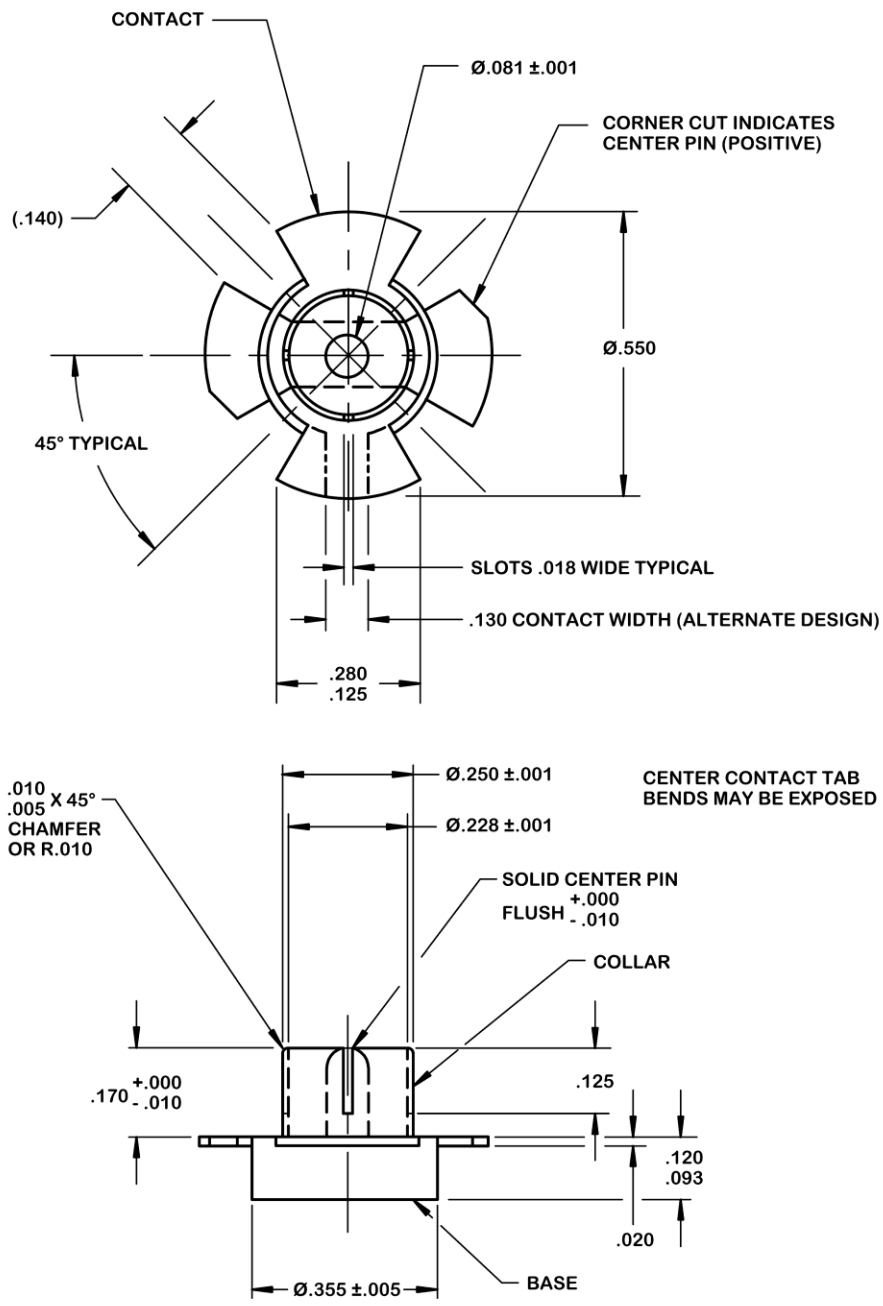

NOTES:
1. All dimensions are in inches.
2. Tolerances: Dimensions ±0.005 unless otherwise specified.
   Angles ±3 degrees unless otherwise specified.
3. The "Ø.250 ± .001" dimension is right after the initial manufacturing of the plug. The dimension may or may not deviate outside the tolerance after numerous inserts/usages of the connector plug.

FIGURE 1. Connector, plug, center contact positive, printed circuit board application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:12Z
Check the source to verify that this is the current version before use.

APPENDIX A

CONNECTOR 3D MODEL

Scope. A yellow message bar appears that says “3D content has been disabled. Enable this feature if you trust this document”. Select one of the options listed on the Options button to either ‘Trust this document one time only’ or ‘Trust this document always’. For additional information on how to enable 3D content in PDF please visit https://helpx.adobe.com/acrobat/using/enable-3d-content-pdf.html

3D MODEL A-1. Connector, plug, center contact positive, printed circuit board application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:12Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 85
DLA - GS

Review Activities:
Navy - MC

Preparing Activity:
DLA -– GS2

(Project 5935-2025-034)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:12Z
Check the source to verify that this is the current version before use.