MIL-B-21154B(MC)
12 September 1972
SUPERSEDING
MIL-B-21154A(MC)
3 August 1966

MILITARY SPECIFICATION

BELTS, MILITARY POLICE: COTTON WEBBING; WHITE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for an adjustable belt made of heavy cotton webbing.

*1.2 Classification. The belts shall be of one type in the following classes as specified (see 6.2):

Class 1 - With insignia buckle, belt fasteners, keepers and slide.

Class 2 - Without insignia buckle, belt fasteners, keepers and slide.

Unless otherwise specified herein, requirements shall apply to both classes.

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester.
UU-P-268	-	Paper, Kraft, Untreated Wrapping.
UU-P-553	-	Paper, Wrapping, Tissue.
DDD-L-20	-	Label; For Clothing, Equipage, And Tentage, (General Use).

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-W-530	-	Webbing, Textile, Cotton, General Purpose, Natural Or In Colors.
MIL-B-17757	-	Boxes, Fiber, Corrugated (Modular Sizes).
MIL-H-21155	-	Hardware For Belt, Military Police.
MIL-T-43566	-	Tape, Textile, Cotton, General Purpose, Natural Or In Colors.

STANDARDS

FEDERAL

FED-STD-751	-	Stitch, Seam And Stitching.

MILITARY

MIL-STD-105	-	Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	-	Marking For Shipment And Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Sample. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article consisting of the number of finished belts specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

*3.3.1 Webbing. The webbing shall be cotton, bleached, type IV, class 2, 3.4 ounces per linear yard, 2-1/4 inches wide conforming to MIL-W-530.

*3.3.2 Tape. The tape for binding the ends of the belt shall be cotton, bleached, 7/8 inch wide conforming to type I, class 2 of MIL-T-43566.

*3.3.3 Thread, polyester. The thread for seaming and sitching the binding shall be polyester conforming to type I, class 1, subclass A, size F, of V-T-285. The thread shall be white shade AG, Cable No. 66049.

*3.3.4 Hardware. The hardware components, consisting of a Marine Corps insignia buckle with belt fasteners, metal keepers, metal slide and snap fasteners, shall conform to MIL-H-21155.

*3.4 Design. The belts shall be the U. S. Marine Corps design shown in Figure 1, consisting of a 50-inch length of heavy webbing bound on each end with lightweight tape, one female snap fastener (cap and socket) for attaching an ammunition magazine carrier to the belt, and four male and female snap fasteners (cap, socket, stud, and post) for securing the bound ends to the belt. The class 1 belt shall have a buckle (with detachable Marine Corps insignia and two belt fasteners for the ends of the belt), two metal keepers and one metal slide assembled thereon as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

*3.5 Construction. The construction of the belts shall conform to Figure 1 and the following.

*3.5.1 Stitches, seams and stitchings. The stitch, seam and stitching types specified herein shall conform to FED-STD-751. Stitch type 301 and seam type BSA-1 shall be used to bind the ends of the belt. Seam and stitching shall be done with 7 to 8 stitches per inch.

*3.5.1.1 Tacking and backstitching. Thread breaks in stitching shall be backstitched not less than 1 inch at each break. Thread tension shall be maintained properly so that there will be no loose stitching and that the lock will be imbedded in the center of the materials sewed. Ends of seam and stitching shall be securely backtacked.

*3.5.2 Binding ends of belts. Turn ends of binding to inside of belt. Stitch ends of binding to belt as shown in Figure 1. The folded width of the binding shall be equal on both sides of the finished belt. The binding shall be turned smoothly and tightly over the top and bottom edges of the belt and the raw ends of the binding shall meet at the center of the belt. Binding shall then be stitched as shown in Figure 1.

3.5.3 Setting of snap fasteners. The holes for the male part of the fasteners shall be formed when the fasteners are driven into the material. When a hole is punched before inserting the female snap fastener, it shall be smaller than the outside diameter of the fastener tube so that the tube must be forced through the hole. All fasteners shall be securely clinched.

*3.5.4 Assembly of class 1 belts. The hardware components specified for class 1 belts in 3.4 shall be assembled thereon as shown in Figure 1.

*3.6 Marking. The following marking shall be printed or stenciled on the inside of the belt and shall conform to type IV, class 5 of DDD-L-20.

Nomenclature (class)
Contract number
Name of contractor
Stock number

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

*3.7 Finished measurements. The finished belts shall conform to the measurements shown in Figure 1.

3.8 Workmanship. The finished belt shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels (AQL).

4. QUALITY ASSURANCE PROVISIONS.

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.2 Inspection. Inspections shall be in accordance with MIL-STD-105 except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be made of completely fabricated belts for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

*4.2.2.1 In-process inspection. Inspection shall be performed during the manufacturing of the end item for the following defects. The sample unit shall be one unassembled belt. The inspection level and AQL shall be as specified in 4.2.3.2. Whenever nonconformance is noted, correction shall be made to the items affected and the process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect
Holes punched to receive female snap fasteners	Not in conformance with requirements specified in 3.5.3.
Cut length of belt	Not within tolerances specified herein.

The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations.

*4.2.3 Examination of the end item. The end item shall be examined for the defects listed in 4.2.3.1. The sample unit shall be one completely fabricated belt.

4.2.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Classification Minor
Webbing or tape	Hole, cut, or tear.	X	
	Not firmly and tightly woven; edge frayed or scalloped.	X	
	Other webbing defects: -seriously affecting serviceability or appearance.	X	
	-affecting serviceability or appearance but not seriously.		X
Hardware	Not assembled as specified.	X	
	Not specified type.	X	
	Broken or malformed; burr or sharp edge which may cause injury in handling.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Finish not as specified:		
	-seriously affecting service-ability or appearance.	X	
	-affecting serviceability or appearance but not seriously.		X
Seams and stitching	Open seams:		
	1/2 inch or less.		X
	More than 1/2 inch.	X	

NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when 2 or more continuous skipped stitches or run-offs occur.

	Run-offs (see open seams)		
	Wrong seam or stitch type.	X	
	Stitch tension loose, resulting in a loosely exposed top or bobbin thread, or tight, resulting in excessive tightness of webbing on seams.		X
	Stitches per inch		
	-One or two stitches less than minimum specified.		X
	-Three or more stitches less than minimum specified.	X	
	-One or more stitchess in excess of maximum specified.		X
	Stitching margins not as specified.		X
	Stitching ends not backstitched.		X
	Thread breaks backstitched less than 1 inch.		X

NOTE: Thread breaks not backstitched shall be classified as open seams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Components and assembly	Defects of components or assembly (not specifically classified):		
	-seriously affecting serviceability or appearance.	X	
	-affecting serviceability or appearance but not seriously.		X
	Mend, darn, or splice	X	
	Any required component or part of belt omitted.	X	
	Any required row of stitching omitted.	X	
	Needle chews	X	
Cleanness	Grease or oil stains, permanent spots or stains.	X	
	Small spots or dirt marks (removable):		
	-seriously affecting appearance	X	
	-affecting appearance but not seriously.		X
	Thread ends not trimmed throughout.		X
Details of construction	Binding:		
	Improperly or loosely applied.		X
	Ends of binding not abutted:		
	-by more than 1/16 inch but not more than 1/4 inch.		X
	-by more than 1/4 inch.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Snap fasteners:		
	Misplaced, failing to effect a smooth and secure closure, or failing to provide sufficient clearance for proper functioning of buckles.	X	
	Not located as specified.	X	
	Not functioning properly, failing to snap closed or open freely.	X	
	Improperly set, i.e., cap on inside of belt instead of outside.	X	
	Clinched loosely so that they rotate around hole in webbing.		X
	Clinched too tightly, cutting webbing.	X	
	Attached insignia on buckle (class 1 belts):		
	Omitted	X	
	Insignia not centered vertically or horizontally on buckle, with the eagle upright.	X	
	Any part of belt fasteners (class 1 belts) defective, failing to effect a smooth and secure engagement.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
	Any metal slide or keeper (class 1 belts) fails to slide freely through double ply of webbing.		X
Marking	Omitted, illegible, incorrect or misplaced, or size not as specified.		X

*4.2.3.2 Inspection levels and AQL's. The inspection levels and AQL's expressed in defects per hundred units (DHU) shall be as follows:

	AQL	Inspection level
For 4.2.2.1		
One class	4.0 DHU	S-3
For 4.2.3.2		
Major	2.5 DHU	I of MIL-STD-105
Total Major and Minor	6.5 DHU	

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing, and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect
Materials	Any component missing Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

*5.1.1 Level A. Each class 1 belt shall have the insignia buckle completely and thoroughly wrapped with anti-tarnish tissue paper conforming to type II of UU-P-553, to protect the finish. The belt shall be adjusted to approximately 33 inches in length, including the buckle, when applicable, then folded in half end to end, with the buckle, when applicable, turned back between the ends, and placed in an individual polyethylene bag. The polyethylene bag shall measure approximately 5 by 20 inches. The polyethylene flexible film shall be 0.0015 inch thick. The polyethylene bag openings shall not be sealed. Each bag shall contain a label (see 5.3).

*5.1.2 Level C. The belts shall be packaged in accordance with industry's practice.

*5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

*5.2.1.1 Method 1. Fifty (50) class 1 belts, or 75 class 2 belts, packaged as specified in 5.1 shall be packed in a shipping container with liner conforming to class weather resistant, size 2A of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Towards the end of the contract, or when there is less than the required amount per container of the same class, mixed classes may be packed within the same shipping container.

*5.2.1.2 Method 2. When specified (see 6.2), six level B shipping containers (300 class 1 belts and 450 class 2 belts) shall be packed in a shipping container conforming to class weather resistant, size 4 of MIL-B-17757, assembled, closed and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same class, mixed classes may be packed within the same shipping container.

*5.2.2 Level B. Fifty (50) class 1 belts, or 75 class 2 belts, packaged as specified in 5.1, shall be packed in a shipping container with liner conforming to class domestic, size 2A of MIL-B-17757, assembled, and closed as specified in the appendix thereto. The fiberboard used in fabrication of the box and liner shall be grades 275 and 200 respectively. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Towards the end of the contract, or when there is less than the required amount per container of the same class, mixed classes may be packed within the same shipping container.

*5.2.3 Level C. Belts, of one class only, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

*5.3 Marking. In addition to any special marking required by the contract or order, the shipping container shall be marked in accordance with the requirements of MIL-STD-129. Polyethylene bagged packages shall have the following information legibly printed or stamped directly on the bag or in black on a paper label inserted within the bag so as to permit ready identification:

Nomenclature (class)
Contract number
Name of contractor
Stock number

*5.3.1 Labels. Each shipping container packed with mixed classes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label with the word "Mixed Classes" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity of each class contained therein.

6. NOTES

6.1 Intended use. The belt covered by this specification is a component of the Marine Corps Military Police Equipment Set, and is intended for wear by personnel performing duties as military police, honor guards, and other occasions where a smarter appearance is desired.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.

(b) Class required (see 1.2).

(c) Whether first article is required (see 3.2).

(d) Number of belts in first article (see 3.2).

(e) Selection of applicable levels of packing (see 5.1).

(f) When level A, method 2, packing is required (see 5.2.1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Samples and shade samples. For information regarding the availability of sample of the belt and of the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8465-N602

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

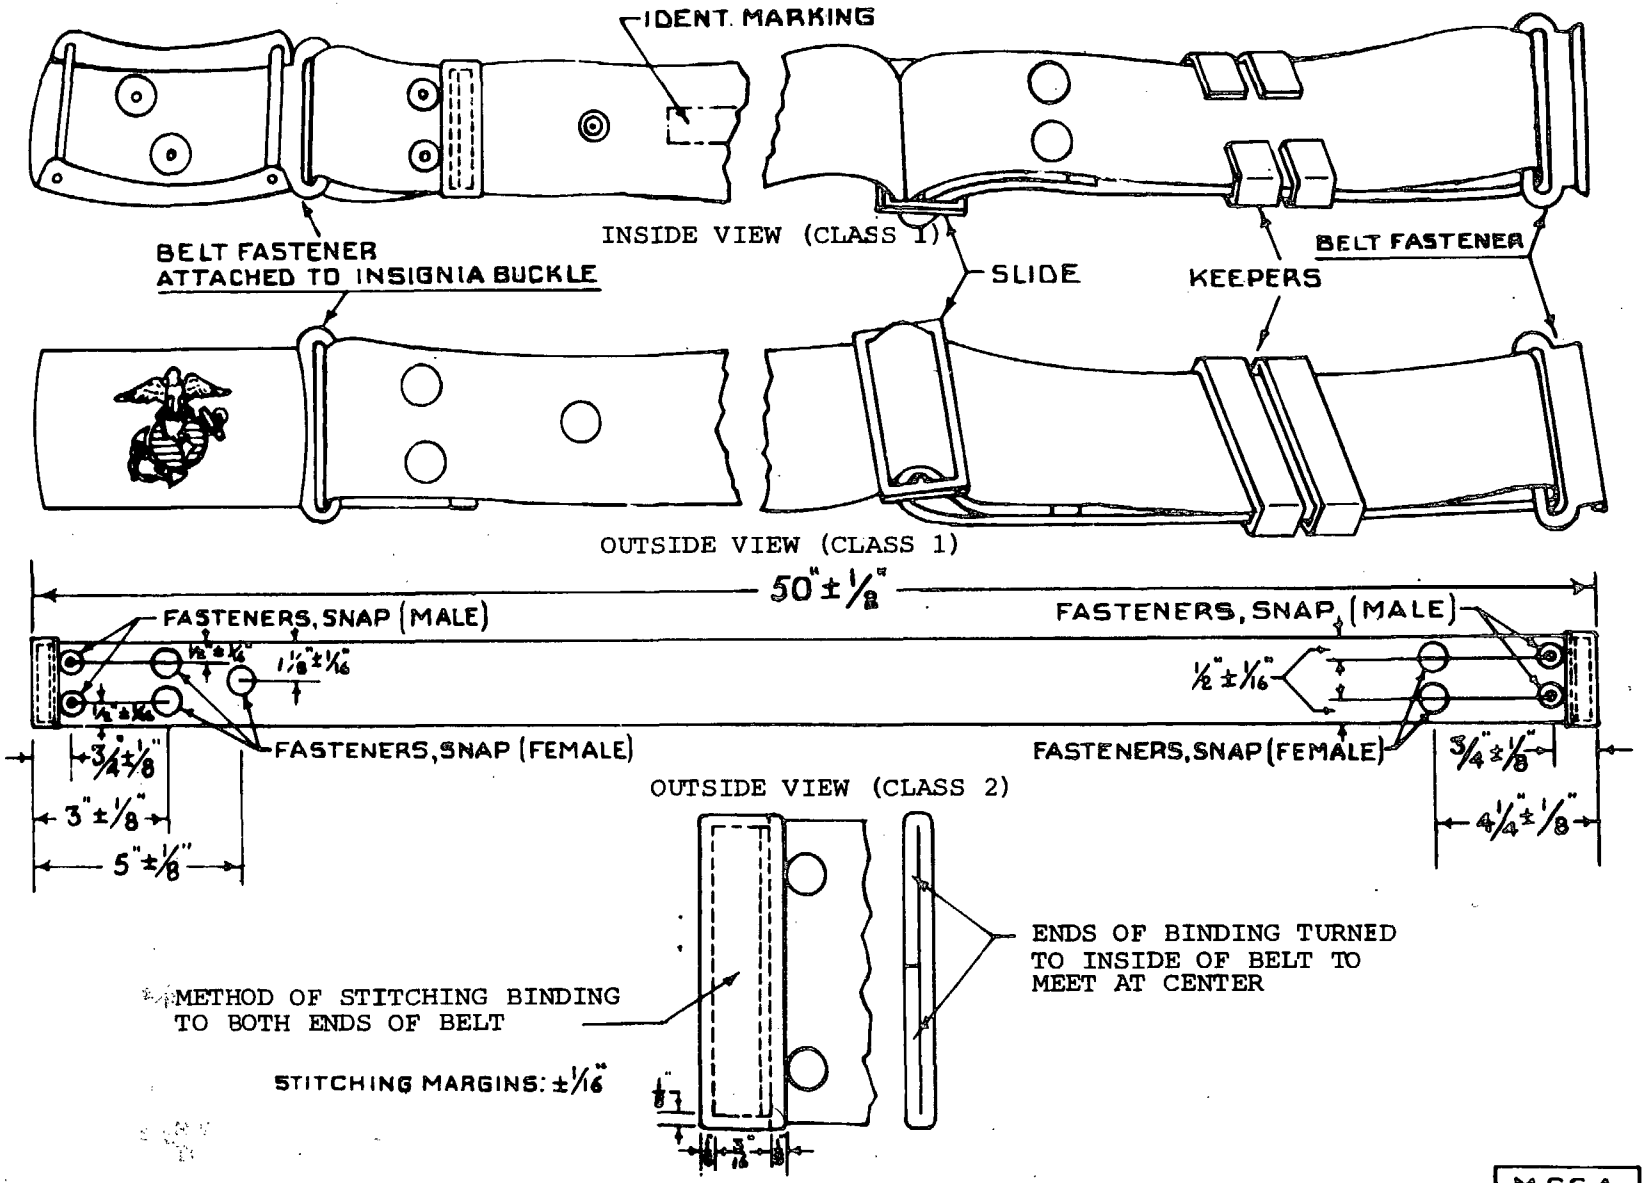


FIGURE 1 - BELT, MILITARY POLICE: COTTON WEBBING, WHITE

M.C.S.A.
826: R.G.F.
12 Sep '72

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.