INCH-POUND

MIL-B-21154C(MC)
8 FEBRUARY 1991
SUPERSEDING
MIL-B-21154B(MC)
12 September 1972

MILITARY SPECIFICATION

BELTS, MILITARY POLICE: COTTON WEBBING; WHITE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for an adjustable belt made of heavy cotton webbing.

1.2 Classification. The belts shall be of one type in the following classes as specified (see 6.2):

Class 1 - With insignia buckle, belt fasteners, keepers and slide.

Class 2 - Without insignia buckle, belt fasteners, keepers and slide.

Class 3 - With hook type belt fastener.

Unless otherwise specified herein, requirements shall apply to all classes.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC-NA FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

A-A-50199	- Thread, Polyester Core, Cotton or Polyester covered
UU-P-268	- Paper, Kraft, Wrapping
UU-P-553	- Paper, Wrapping, Tissue.
DDD-L-20	- Label; for Clothing, Equipage, And Tentage, (General Use).

MILITARY

MIL-F-411	- Fasteners, Belt; Clip, End Strap with Hook, and Keepers, Slide
MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural Or In Colors.
MIL-B-17757	- Box, Shipping, Fiberboard (Modular sizes).
MIL-H-21155	- Hardware For Belt, Military Police.
MIL-T-43566	- Tape, Textile, Cotton, or Polyester, General Purpose, Natural Or In Colors.

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams And Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

(Unless otherwise indicated, copies of federal and military specifications and standards are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS
U.S. Postal Service Manual

(Application for copies of the manual should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Non-government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N.W., Washington, D. C. 20026.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These douments also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

3.1 Standard Sample. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the standard sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, finished belts shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provisions of the specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Webbing. The webbing shall be cotton, bleached, type IV, class 2, 3.4 ounces per linear yard, 2-1/4 inches wide conforming to MIL-W-530.

3.3.2 Tape. The tape for binding the ends of the belt shall be cotton, bleached, 7/8 inch wide conforming to type I, class 2 of MIL-T-43566.

3.3.3 Thread, polyester. The thread for seaming and stitching the binding shall conform to type II, ticket No. 16, 4 ply of A-A-50199. The thread shall be white shade AG, cable No. 66049.

3.3.4 Hardware. The hardware components for all classes shall conform to MIL-H-21155 which includes the class 1 Marine Corps insignia buckle. The class 3 belt fastener shall be brass conforming to type I, style 2, construction A of MIL-F-411, except that the fastener shall be alloy A3 brass of QQ-C-390 and polished to a mirror like finish.

3.4 Design. The belts shall be the U. S. Marine Corps design shown in Figure 1, consisting of a 50-inch length of heavy webbing bound on each end with lightweight tape, one female snap fastener (cap and socket) for attaching an ammunition magazine carrier to the belt, and four male and female snap fasteners (cap, socket, stud, and post) for securing the bound ends to the belt. The class 1 belt shall have a buckle (with detachable Marine Corps insignia and two belt fasteners for the ends of the belt), two metal keepers and one metal slide assembled thereon as shown in Figure 1. The class 3 belt shall contain the same hardware as the class 1 belt except the buckle will be replaced by a polished brass hook style belt fastener (see 3.3.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

3.5 Construction. The construction of the belts shall conform to Figure 1 and the following.

3.5.1 Stitches, seams and stitchings. The stitch, seam and stitching types specified herein shall conform to FED-STD-751. Stitch type 301 and seam type BSA-1 shall be used to bind the ends of the belt. Seam and stitching shall be done with 7 to 8 stitches per inch.

3.5.1.1 Tacking and backstitching. Thread breaks in stitching shall be backstitched not less than 1 inch at each break. Thread tension shall be maintained properly so that there will be no loose stitching and that the lock will be imbedded in the center of the materials sewed. Ends of seam and stitching shall be securely backtacked.

3.5.2 Binding ends of belts. Turn ends of binding to inside of belt. Stitch ends of binding to belt as shown in Figure 1. The folded width of the binding shall be equal on both sides of the finished belt. The binding shall be turned smoothly and tightly over the top and bottom edges of the belt and the raw ends of the binding shall meet at the center of the belt. Binding shall then be stitched as shown in Figure 1.

3.5.3 Setting of snap fasteners. The holes for the male part of the fasteners shall be formed when the fasteners are driven into the material. When a hole is punched before inserting the female snap fastener, it shall be smaller than the outside diameter of the fastener tube so that the tube must be forced through the hole. All fasteners shall be securely clinched.

3.5.4 Assembly of class 1 and class 3 belts. The hardware components specified for class 1 and class 3 belts in 3.3.4 shall be assembled thereon as shown in Figure 1.

3.6 Marking. The following marking shall be printed or stenciled on the inside of the belt and shall conform to type IV, class 5 of DDD-L-20. As an alternate, a white paper label containing the required marking information legibly printed or stamped in black may be inserted in the polyethylene bag.

Nomenclature
Contract Number
Name of contractor
Stock number

3.7 Finished measurements. The finished belts shall conform to the measurements shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:00Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished belt shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.1.3 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)

b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified all isnpections shall be in accordance with the test conditions specified in MIL-STD-1494.

4.4 First article inspection. When a first article is

Source: https://assist.dla.mil -- Downloaded: 20260-19T09:00Z
Check the source to verify that this is the current version before use.

required (see 6.2), it shall be examined for the defects specified in 4.5.3.1 and 4.5.3.2. The presence of any defect or failure to pass any test shall be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer (see 6.2).

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and material shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item for the following defects. The sample unit shall be one unassembled belt. The inspection level shall be S-3 (see 6.5).

Examine	Defect
Holes punched to receive female snap fasteners	Not in conformance with requirements specified in 3.5.3
Cut length of belt	Not within tolerances specified herein.

The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations.

4.2.3 Examination of the end item. The end item shall be examined for the defects listed in 4.2.3.1. The sample unit shall be one completely fabricated belt. The inspection level shall be S-1 (see 6.5).

4.2.3.1 General defects. General defects shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Webbing or tape	Hole, cut, or tear.	101	
	Not firmly and tightly woven; edge frayed or scalloped.	102	
	Other webbing defects: -seriously affecting serviceability or appearance.	103	
	-affecting serviceability or appearance but not seriously.		201
Hardware	Not assembled as specified.	104	
	Not specified type.	105	
	Broken or malformed; burr or sharp edge which may cause injury in handling.	106	
	Finish not as specified: -seriously affecting serviceability or appearance.	107	
	-affecting serviceability or appearance but not seriously.		202
Seams and stitching	Open seams: 1/2 inch or less.		203
	More than 1/2 inch.	108	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when 2 or more continuous skipped stitches or run-offs occur.		
	Run-offs (see open seams)		
	Wrong seam or stitch type.	109	
	Stitch tension loose, resulting in a loosely exposed top or bobbin thread, or tight, resulting in excessive tightnes of webbing on seams.		204

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Stitches per inch -One or two stitches less than minimum specified.		205
	-Three or more stitches less than minimum specified.	110	
	-One or more stitches in excess of maximum specified.		206
	Stitching margins not as specified.		207
	Stitching ends not backstitched.		208
	Thread breaks backstitched less than 1 inch.		209
	NOTE: Thread breaks not backstitched shall be classified as open seams.		
Components and assembly	Defects of components or assembly (not specifically classified): -seriously affecting serviceability or appearance.	111	
	-affecting serviceability or appearance but not seriously.		210
	Mend, darn, or splice	112	
	Any required component or part of belt omitted.	113	
	Any required row of stitching omitted.	114	
	Needle chews	115	
Cleanness	Grease or oil stains, permanent spots or stains.	116	
	Small spots or dirt marks (removable): -seriously affecting appearance	117	
	-affecting appearance but not seriously.		211

Source: https://assist.dla.mil -- Downloaded: 20261O-19T09:00Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification Major	Minor
	Thread ends not trimmed throughout.		212
Details of construction	Binding:		
	Improperly or loosely applied.		213
	Ends of binding not abutted:		
	-by more than 1/16 inch but not more than 1/4 inch.		214
	-by more than 1/4 inch.	118	
	Snap fasteners:		
	Misplaced, failing to effect a smooth and secure closure, or failing to provide sufficient clearance for proper functioning of buckles.	119	
	Not located as specified.	120	
	Not functioning properly, failing to snap closed or open freely.	121	
	Improperly set, i.e., cap on inside of belt instead of outside.	122	
	Clinched loosely so that they rotate around hole in webbing.		215
	Clinched too tightly, cutting webbing.	123	
	Attached insignia on buckle (class I belts) :		
	Omitted	124	
	Insignia not centered vertically or horizontally on buckle, with the eagle upright.	125	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Any part of belt fasteners (class 1 belts) defective, failing to effect a smooth and secure engagement.	126	
	Any metal slide or keeper fails to slide freely through double ply of webbing.		216
Marking	Omitted, illegible, incorrect or misplaced, or size not as specified.		217

4.5.3.2 Finished measurement examination. The belts shall be examined for defects in dimensions. Any dimension that is not within the specified tolerances shall be classified as a defect. The inspection level shall be S-2 (see 6.5).

4.5.4 Examination of packaging. An examination shall be made to determine compliance with packaging, packing, and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps,

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

	stapling. Bulging or distortion of containers.
Content	Number per container is more or less than required.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each class 1 belt shall have the insignia buckle completely and thoroughly wrapped with anti-tarnish tissue paper conforming to type II of UU-P-553, to protect the finish. The belt shall be adjusted to approximately 33 inches in length, including the buckle, when applicable, then folded in half end to end, with the buckle, when applicable, turned back between the ends, and placed in an individual polyethylene bag. The polyethylene bag shall measure approximately 5 by 20 inches. The polyethylene flexible film shall be 0.0015 inch thick. The polyethylene bag openings shall not be sealed. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. The belts shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2.).

5.2.1 Level A.

5.2.1.1 Method 1. Fifty (50) class 1 or class 3 belts, or 75 class 2 belts, packaged as specified in 5.1 shall be packed in a shipping container with liner conforming to class weather resistant, variety DW, grade V15c, size 2A of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.1.2 Method 2. When specified (see 6.2), six level B shipping containers (300 class 1 belts or class 3 belts or 450 class 2 belts) shall be packed in a shipping container conforming to class weather resistant, variety DW, grade V15c, size 4 of MIL-B-17757,assembled, closed and reinforced as specified in the appendix thereto.

5.2.2 Level B. Fifty (50) class 1 or class 3 belts, or 75

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

★U.S. GOVERNMENT PRINTING OFFICE: 1996-746-063/20716

class 2 belts, packaged as specified in 5.1, shall be packed in a shipping container with liner conforming to type CF,class domestic, variety DW, size 2A of MIL-B-17757, assembled, and closed as specified in the appendix thereto. The fiberboard used in fabrication of the box and liner shall be grades 275 and 200 respectively. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.3 Commercial. Belts, of one class only, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping container shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The belt covered by this specification is intended for wear by personnel performing duties as military police, honor guards, and other occasions where a smarter appearance is desired.

6.2 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Class required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of belts in first article (see 3.2).
(e) Selection of applicable levels of packing (see 5.1).
(f) When level A, method 2, packing is required (see 5.2.1.2)
(g) Acceptance criteria.

6.3 Standard samples and shade samples. For information regarding the availability of sample belts and standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For in process inspection. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 4.0 defects is recommended.

6.5.2 For end item examination. An AQL, expressed in terms of defects per hundred units, of 2.5 for major defects and 6.5 for total (major and minor).

6.5.3 For finished measurement examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.4 Inspection of packaging. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.6 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

6.7 Subject (Key word) listing.
Honor guard

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensive changes.

Preparing Activity:
Navy - MC
Project No. 8465N086

Custodians:
Army - GL
Navy - NU
Air Force- 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

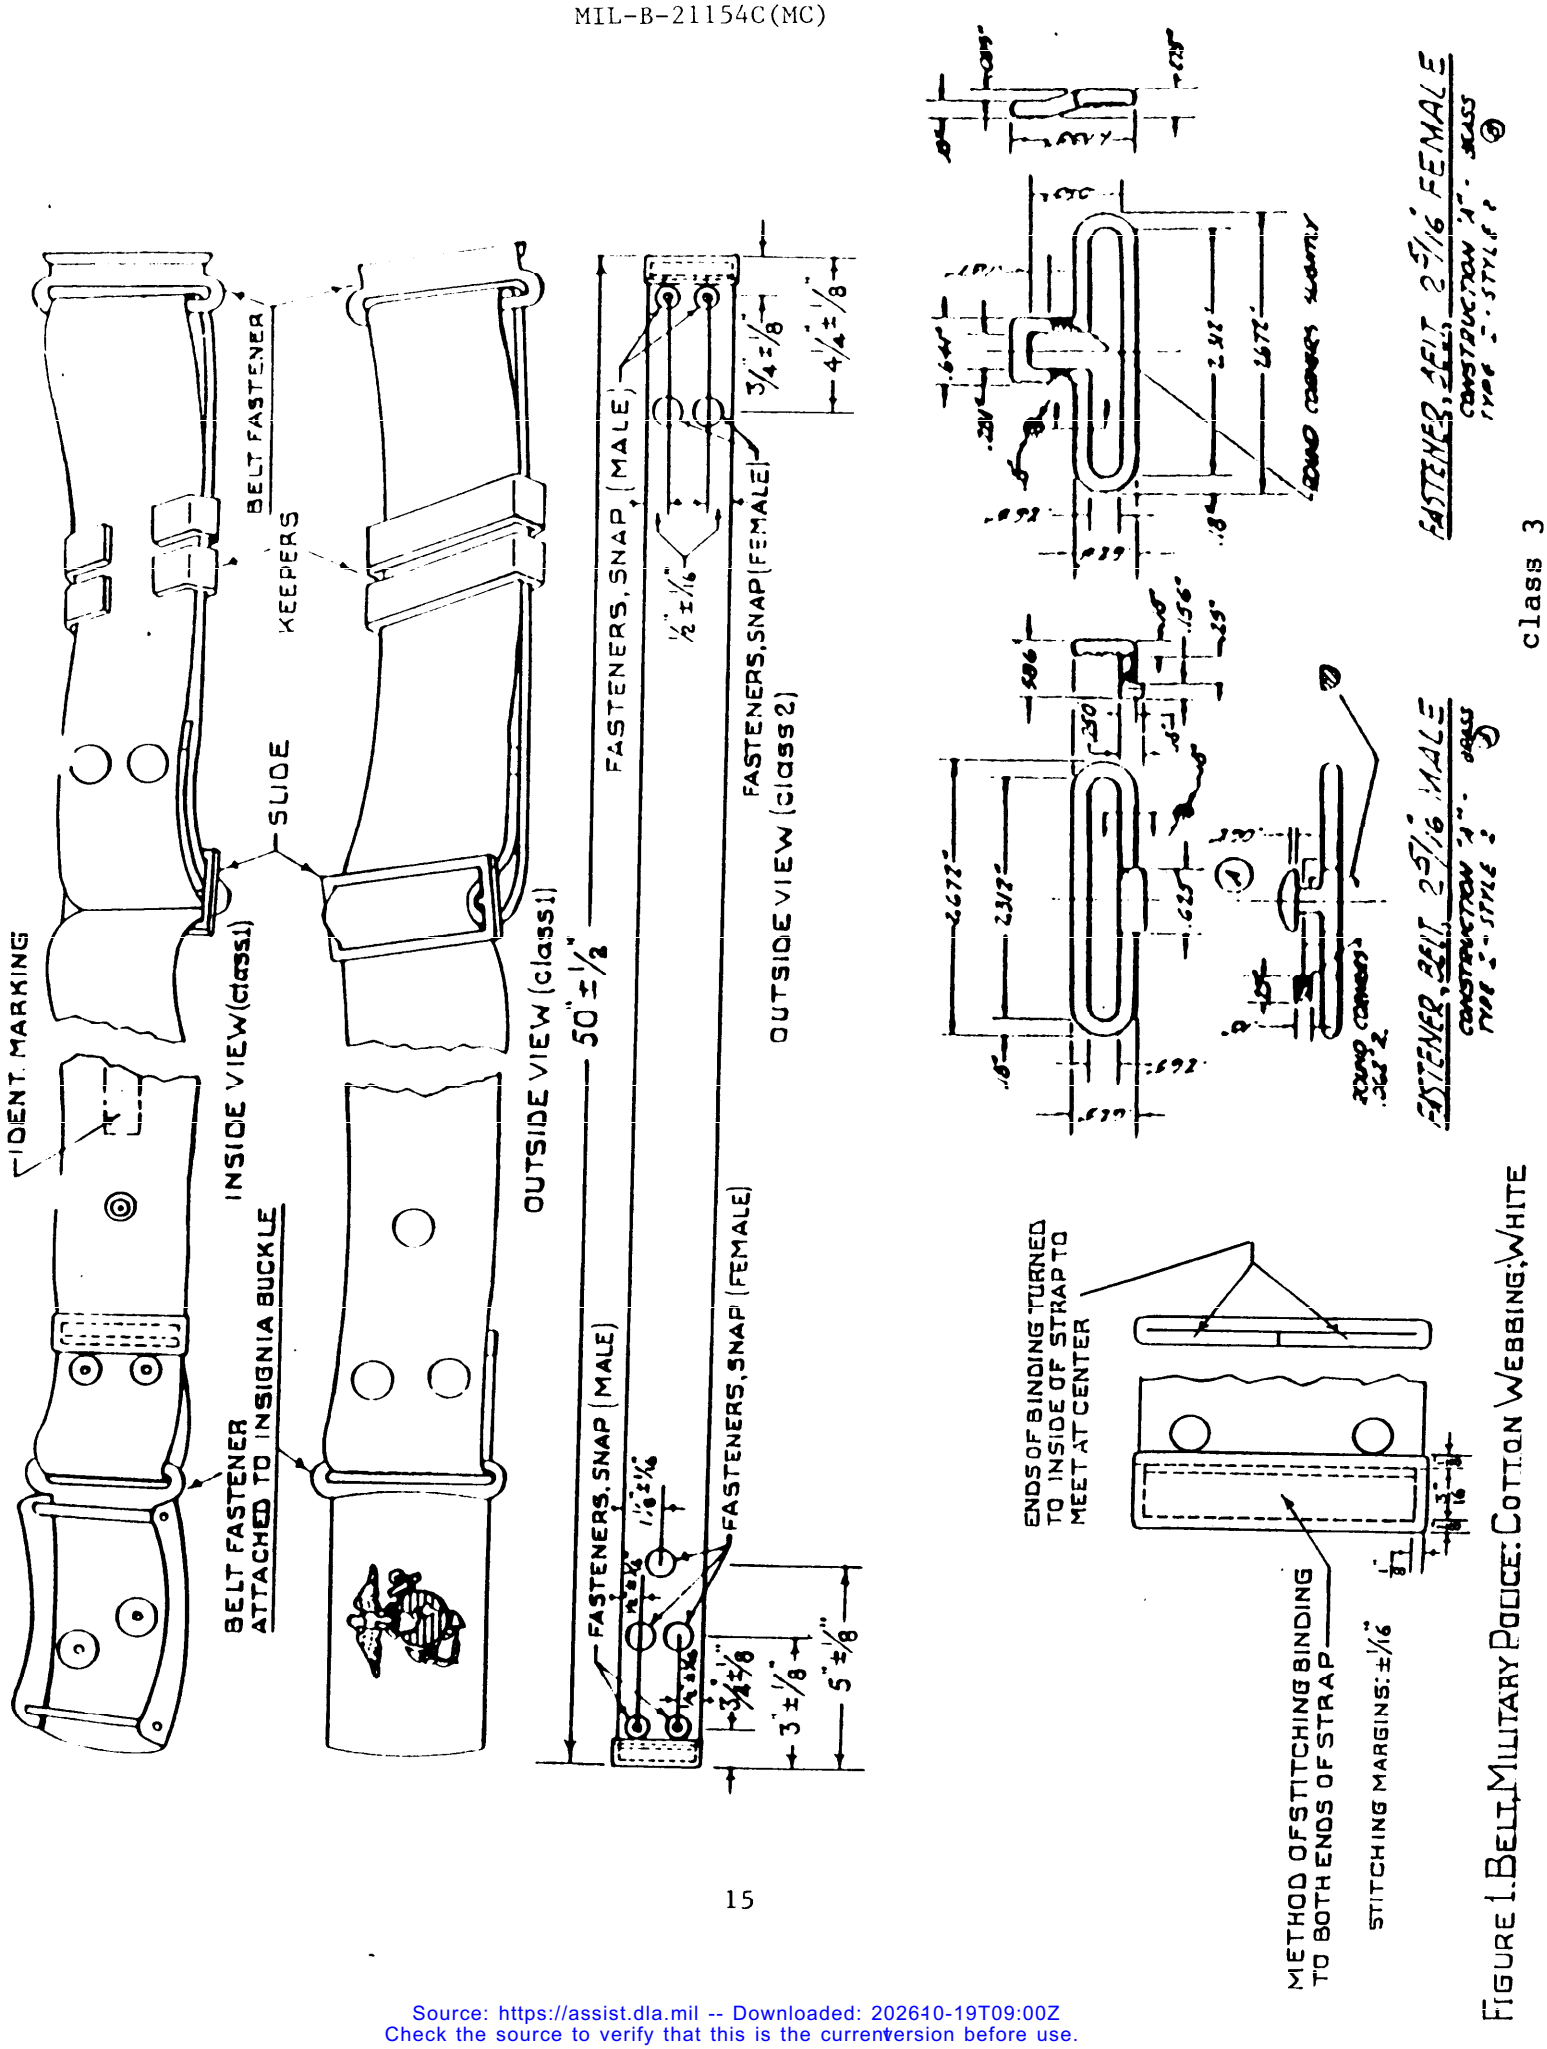


FIGURE 1. BELT, MILITARY POLICE: COTTON WEBBING, WHITE

class 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-B-21154C(MC)	8 FEBRUARY 1991

3. DOCUMENT TITLE

BELTS, MILITARY POLICE: COTTON WEBBING; WHITE

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	(1) Commercial (202) 696-1186/87/88	(2) AUTOVON 226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, DC 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:00Z
Check the source to verify that this is the current version before use.