MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD RECEPTACLE, CARD INSERTION, CONTACT SPACING (.100) TYPE AD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-21097.

TYPE AD CONNECTORS SHALL NOT BE USED IN AIRBORNE EQUIPMENT.

NOT FOR USE IN NEW DESIGNS OF ARMY EQUIPMENT


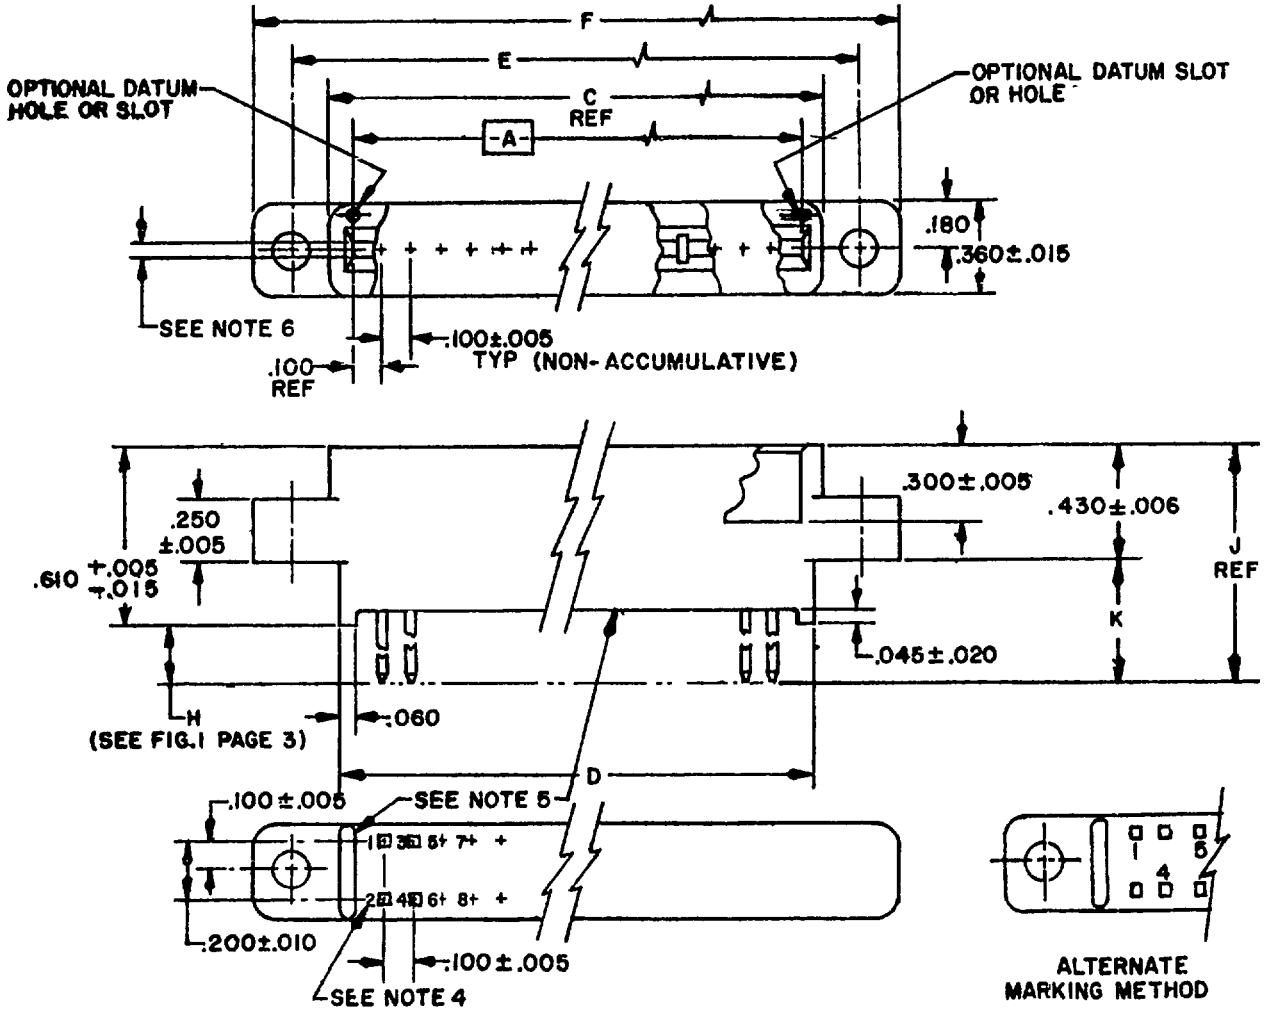


FIGURE 1. Type AD connectors.


Ⓑ denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

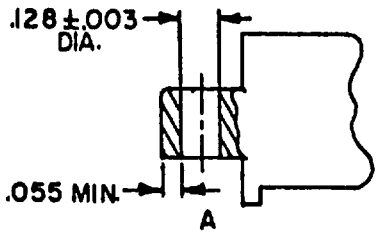


A
CLEARANCE HOLE

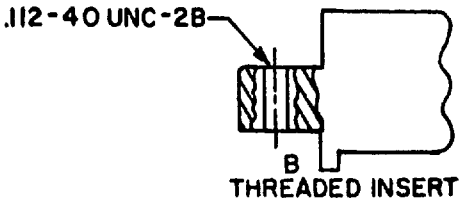

B
THREADED INSERT

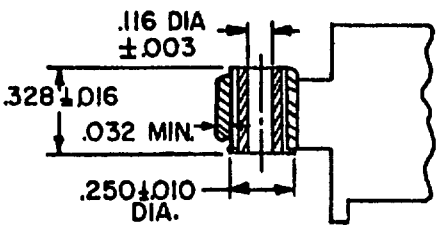

C
FLOAT BUSHING




OPTIONAL END
CONSTRUCTION
CLASS "b" CONNECTORS
STRAIGHT-PLUG-IN


D
NO MOUNTING FLANGE
PRINTED CIRCUIT BOARD
TYPE

MOUNTING PROVISIONS

FIGURE 1. Type AD connectors - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

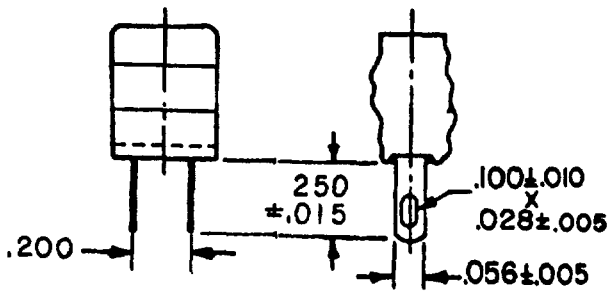

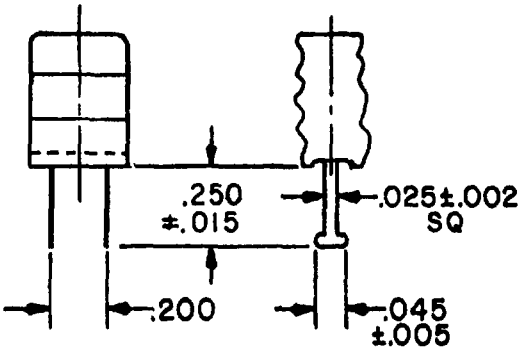


Optional

Class 'a' dual contact, straight eyelet

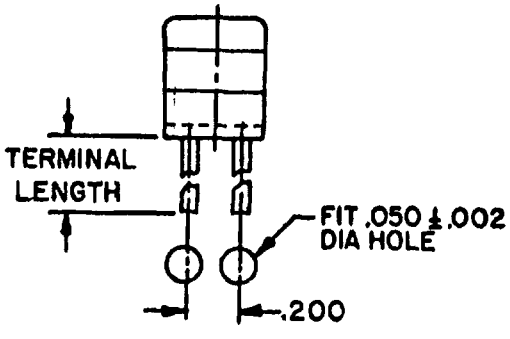

Mounting board thickness	Terminal length
.06	.109
.09	.146
.12	.177

Class 'b' dual contact, straight plug-in

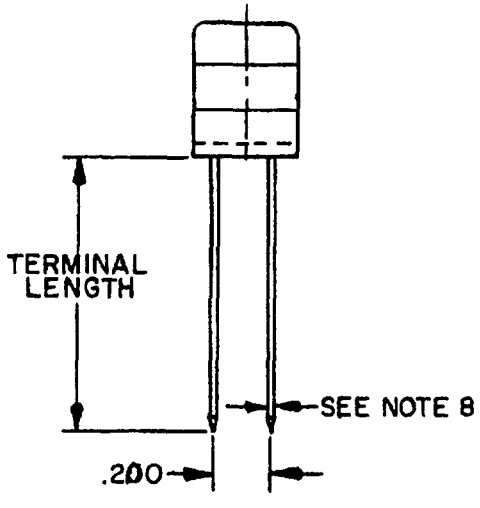

No of wire wraps	Terminal length	Wire size
2	.481 ±.020	26, 28 & 30 AWG
3	.665 ±.020	26, 28 & 30 AWG

Class 'd' wrappost

TYPE AD DUAL CONTACT

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.075	1.91	.481	12.22	2.300	58.42	3.835	97.41
.003	.08	.09	2.3	.610	15.49	2.335	59.31	3.860	98.04
.005	.13	.100	2.54	.661	16.79	2.350	59.69	4.100	104.14
.006	.15	.109	2.77	.665	16.89	2.375	60.32	4.150	105.41
.007	.18	.112	2.84	.719	18.26	2.460	62.48	4.175	106.05
.010	.25	.116	2.95	.756	19.20	2.600	66.04	4.260	108.20
.015	.38	.12	3.0	.787	19.99	2.635	66.93	4.400	111.76
.016	.41	.128	3.25	.845	21.46	2.650	67.31	4.435	112.65
.020	.51	.146	3.71	.860	21.84	2.760	70.10	4.450	113.03
.025	.64	.177	4.50	1.091	27.71	2.775	70.48	4.560	115.82
.028	.71	.180	4.57	1.275	32.39	3.035	77.09	4.575	116.20
.032	.81	.200	5.08	1.600	40.64	3.075	78.10	4.835	122.81
.045	1.14	.250	6.35	1.650	41.91	3.100	78.74	4.875	123.83
.050	1.27	.289	7.35	1.760	44.70	3.150	80.01	5.100	129.54
.055	1.40	.300	7.62	1.900	48.26	3.260	82.80	5.135	130.43
.056	1.42	.326	8.28	1.950	49.53	3.335	84.71	5.150	130.81
.060	1.52	.357	9.07	2.060	52.32	3.575	90.80	5.260	133.60
.062	1.57	.430	10.92	2.075	52.70	3.700	93.98	5.575	141.60
						3.750	95.25	5.835	148.21

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 (.38 mm) for three place decimals and ±.02 (.5 mm) for two place decimals.
4. Contacts and terminals shall be designated on the connector using raised or silk screened numerals in the location shown on the connector drawing.
5. The shape of the underside of the mounting flange. Center barrier shall be optional.
6. Slot shall accept a printed wiring board with the following thickness:

   Size 2 - .054 (1.37 mm) to .071 (1.80 mm).

   Slot shall prevent entry of a printed wiring board having the following thickness:

   Size 3 - .084 (2.13 mm).
7. Gate allowance shall not exceed .005 (.13 mm) above or below the molded surface.
8. Class "d" wrappost geometry shall be in accordance with MIL-STD-1130. Wrappost contacts shall be gold plated in accordance with MIL-G-45204, type II, grade C, class 1 over nickel plating per QQ-N-290, class 2, 30 microinches minimum.

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

Dash number	Type	Style	Class	Mounting provisions	±.007 A	C	D	±.010 E	±.020 F	H	J REF	±.030 K
001	AD	15	a	A	1.600	1.760	1.650	2.075	2.335	.250	.860	.430
002	↓	↓	a	B	↓	↓	↓	↓	↓	.250	.860	.430
003	↓	↓	a	C	↓	↓	↓	↓	↓	.250	.860	.430
004	↓	↓	b	A	↓	↓	↓	↓	↓	.109	.719	.289
005	↓	↓	b	B	↓	↓	↓	↓	↓	.109	.719	.289
007	↓	↓	b	D	↓	↓	↓	↓	↓	.109	.719	.289
008	↓	↓	b	A	↓	↓	↓	↓	↓	.146	.756	.326
009	↓	↓	b	B	↓	↓	↓	↓	↓	.146	.756	.326
011	↓	↓	b	D	↓	↓	↓	↓	↓	.146	.756	.326
012	↓	↓	b	A	↓	↓	↓	↓	↓	.177	.787	.357
013	↓	↓	b	B	↓	↓	↓	↓	↓	.177	.787	.357
015	↓	↓	b	D	↓	↓	↓	↓	↓	.177	.787	.357
016	↓	↓	d	A	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
017	↓	↓	d	B	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
018	↓	↓	d	C	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
019	↓	↓	d	A	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
020	↓	↓	d	B	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
021	↓	↓	d	C	1.600	1.760	1.650	2.075	2.335	.665 ±.020	1.275	.845

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

Dash number	Type	Style	Class	Mounting provisions	±.007 A	C	D	±.010 ± E	±.020 F	H	J REF	±.030 K
022	AD	18	a	A	1.900	2.060	1.950	2.375	2.635	.250	.860	.430
023	↓	↓	a	B	↓	↓	↓	↓	↓	.250	.860	.430
024	↓	↓	a	C	↓	↓	↓	↓	↓	.250	.860	.430
025	↓	↓	b	A	↓	↓	↓	↓	↓	.109	.719	.289
026	↓	↓	b	B	↓	↓	↓	↓	↓	.109	.719	.289
028	↓	↓	b	D	↓	↓	↓	↓	↓	.109	.719	.289
029	↓	↓	b	A	↓	↓	↓	↓	↓	.146	.756	.326
030	↓	↓	b	B	↓	↓	↓	↓	↓	.146	.756	.326
032	↓	↓	b	D	↓	↓	↓	↓	↓	.146	.756	.326
033	↓	↓	b	A	↓	↓	↓	↓	↓	.177	.787	.357
034	↓	↓	b	C	↓	↓	↓	↓	↓	.177	.787	.357
036	↓	↓	b	D	↓	↓	↓	↓	↓	.177	.787	.357
037	↓	↓	d	A	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
038	↓	↓	d	B	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
039	↓	↓	d	C	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
040	↓	↓	d	A	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
041	↓	↓	d	B	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
042	↓	↓	d	C	1.900	2.060	1.950	2.375	2.635	.665 ±.020	1.275	.845

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

Dash number	Type	Style	Class	Mounting provisions	±.007 A	C	D	±.010 E	±.020 F	H	J REF	±.030 K
043	AD	22	a	A	2.300	2.460	2.350	2.775	3.035	.250	.860	.430
044	↓	↓	a	B	↓	↓	↓	↓	↓	.250	.860	.430
045	↓	↓	a	C	↓	↓	↓	↓	↓	.250	.860	.430
046	↓	↓	b	A	↓	↓	↓	↓	↓	.109	.719	.289
047	↓	↓	b	B	↓	↓	↓	↓	↓	.109	.719	.289
049	↓	↓	b	D	↓	↓	↓	↓	↓	.109	.719	.289
050	↓	↓	b	A	↓	↓	↓	↓	↓	.146	.756	.326
051	↓	↓	b	B	↓	↓	↓	↓	↓	.146	.756	.326
053	↓	↓	b	D	↓	↓	↓	↓	↓	.146	.756	.326
054	↓	↓	b	A	↓	↓	↓	↓	↓	.177	.787	.357
055	↓	↓	b	B	↓	↓	↓	↓	↓	.177	.787	.357
057	↓	↓	b	D	↓	↓	↓	↓	↓	.177	.787	.357
058	↓	↓	d	A	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
059	↓	↓	d	B	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
060	↓	↓	d	C	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
061	↓	↓	d	A	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
062	↓	↓	d	B	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
063	↓	↓	d	C	2.300	2.460	2.350	2.775	3.035	.665 ±.020	1.275	.845

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

Dash number	Type	Style	Class	Mounting provisions	±.007 A	C	D	±.010 E	±.020 F	H	J REF	±.030 K
064	AD	25	a	A	2.600	2.760	2.650	3.075	3.335	.250	.860	.430
065	↓	↓	a	B	↓	↓	↓	↓	↓	250	.860	.430
066			a	C						.250	.860	.430
067			b	A						.109	.719	.289
068			b	B						.109	.719	.289
070			b	D						.109	.719	.289
071			b	A						.146	.756	.326
072			b	B						.146	.756	.326
074			b	D						.146	.756	.326
075			b	A						.177	.787	.357
076			b	B						.177	.787	.357
078			b	D						.177	.787	.357
079			d	A						.481 ±.020	1.091	.661
080			d	B						.481 ±.020	1.091	.661
081			d	C						.481 ±.020	1.091	.661
082			d	A						.665 ±.020	1.275	.845
083			d	B						.665 ±.020	1.275	.845
084	↓	↓	d	C	2.600	2.760	2.650	3.075	3.335	.665 ±.020	1.275	.845

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

Dash number	Type	Style	Class	Mounting provisions	±.007 A	C	D	±.010 E	±.020 F	H	J REF	±.030 K
085	AD	30	a	A	3.100	3.260	3.150	3.575	3.835	.250	.860	.430
086	↓	↓	a	B	↓	↓	↓	↓	↓	.250	.860	.430
087	↓	↓	a	C	↓	↓	↓	↓	↓	.250	.860	.430
088	↓	↓	b	A	↓	↓	↓	↓	↓	.109	.719	.289
089	↓	↓	b	B	↓	↓	↓	↓	↓	.109	.719	.289
091	↓	↓	b	D	↓	↓	↓	↓	↓	.109	.719	.289
092	↓	↓	b	A	↓	↓	↓	↓	↓	.146	.756	.326
093	↓	↓	b	B	↓	↓	↓	↓	↓	.146	.756	.326
095	↓	↓	b	D	↓	↓	↓	↓	↓	.146	.756	.326
096	↓	↓	b	A	↓	↓	↓	↓	↓	.177	.787	.357
097	↓	↓	b	B	↓	↓	↓	↓	↓	.177	.787	.357
099	↓	↓	b	D	↓	↓	↓	↓	↓	.177	.787	.357
100	↓	↓	d	A	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
101	↓	↓	d	B	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
102	↓	↓	d	C	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
103	↓	↓	d	A	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
104	↓	↓	d	B	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
105	↓	↓	d	C	3.100	3.260	3.150	3.575	3.835	.665 ±.020	1.275	.845

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

Dash number	Type	Style	Class	Mounting provisions	±.007 A	C	D	±.010 E	±.020 F	H	J REF	±.030 K
106	AD	36	a	A	3.700	3.860	3.750	4.175	4.435	.250	.860	.430
107	↓	↓	a	B	↓	↓	↓	↓	↓	.250	.860	.430
108	↓	↓	a	C	↓	↓	↓	↓	↓	.250	.860	.430
109	↓	↓	b	A	↓	↓	↓	↓	↓	109	.719	.289
110	↓	↓	b	B	↓	↓	↓	↓	↓	.109	.719	.289
112	↓	↓	b	D	↓	↓	↓	↓	↓	.109	.719	.289
113	↓	↓	b	A	↓	↓	↓	↓	↓	.146	.756	.326
114	↓	↓	b	B	↓	↓	↓	↓	↓	.146	.756	.326
116	↓	↓	b	D	↓	↓	↓	↓	↓	.146	.756	.326
117	↓	↓	b	A	↓	↓	↓	↓	↓	.177	.787	.357
118	↓	↓	b	B	↓	↓	↓	↓	↓	.177	.787	.357
120	↓	↓	d	D	↓	↓	↓	↓	↓	.177	.787	.357
121	↓	↓	d	A	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
122	↓	↓	d	B	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
123	↓	↓	d	C	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
124	↓	↓	d	A	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
125	↓	↓	d	B	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
126	↓	↓	d	C	3.700	3.860	3.750	4.175	4.435	.665 ±.020	1.275	.845

FIGURE 1. Type AD connectors - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

	Dash number	Type	Style	Class	Mounting provisions	±.010 A	C	D	±.015 E	±.020 F	H	J REF	±.030 K
(B)	127	AD	40	a	A	4.100	4.260	4.150	4.575	4.835	.250	.860	.430
(B)	128	↓	↓	a	B	↓	↓	↓	↓	↓	.250	.860	.430
(B)	129			a	C						.250	.860	.430
(B)	130			b	A						.109	.719	.289
(B)	131			b	B						.109	.719	.289
	133			b	D						.109	.719	.289
	134			b	A						.146	.756	.326
	135			b	B						.146	.756	.326
	137			b	D						.146	.756	.326
	138			b	A						.177	.787	.357
	139			b	B						.177	.787	.357
	141			b	D						.177	.787	.357
	142			d	A						.481 ±.020	1.091	.661
	143			d	B						.481 ±.020	1.091	.661
	144			d	C						.481 ±.020	1.091	.661
	145			d	A						.665 ±.020	1.275	.845
	146			d	B	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
	147	↓	↓	d	C	4.100	4.260	4.150	4.575	4.835	.665 ±.020	1.275	.845

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

Dash number	Type	Style	Class	Mounting provisions	±.010 A	C	D	±.015 E	±.020 F	H	J REF	±.030 K
148	AD	43	a	A	4.400	4.560	4.450	4.875	5.135	.250	.860	.430
149	↓	↓	a	B	↓	↓	↓	↓	↓	.250	.860	.430
150	↓	↓	a	C	↓	↓	↓	↓	↓	.250	.860	.430
151	↓	↓	b	A	↓	↓	↓	↓	↓	.109	.719	.289
152	↓	↓	b	B	↓	↓	↓	↓	↓	.109	.719	.289
154	↓	↓	b	D	↓	↓	↓	↓	↓	.109	.719	.289
155	↓	↓	b	A	↓	↓	↓	↓	↓	.146	.756	.326
156	↓	↓	b	B	↓	↓	↓	↓	↓	.146	.756	.326
158	↓	↓	b	D	↓	↓	↓	↓	↓	.146	.756	.326
159	↓	↓	b	A	↓	↓	↓	↓	↓	.177	.787	.357
160	↓	↓	b	B	↓	↓	↓	↓	↓	.177	.787	.357
162	↓	↓	b	D	↓	↓	↓	↓	↓	.177	.787	.357
163	↓	↓	d	A	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
164	↓	↓	d	B	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
165	↓	↓	d	C	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
166	↓	↓	d	A	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
167	↓	↓	d	B	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
168	↓	↓	d	C	4.400	4.560	4.450	4.875	5.135	.665 ±.020	1.275	.845

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

Dash number	Type	Style	Class	Mounting provisions	±.010 A	5.260	5.150	±.015 E	±.020 F	H	J REF	±.030 K
169	AD	50	a	A	5.100	5.260	5.150	5.575	5.835	.250	.860	.430
170	↓	↓	a	B	↓	↓	↓	↓	↓	.250	.860	.430
171	↓	↓	a	C	↓	↓	↓	↓	↓	.250	.860	.430
172	↓	↓	b	A	↓	↓	↓	↓	↓	.109	.719	.289
173	↓	↓	b	B	↓	↓	↓	↓	↓	.109	.719	.289
175	↓	↓	b	D	↓	↓	↓	↓	↓	.109	.719	.289
176	↓	↓	b	A	↓	↓	↓	↓	↓	.146	.756	.326
177	↓	↓	b	B	↓	↓	↓	↓	↓	.146	.756	.326
179	↓	↓	b	D	↓	↓	↓	↓	↓	.146	.756	.326
180	↓	↓	b	A	↓	↓	↓	↓	↓	.177	.787	.357
181	↓	↓	b	B	↓	↓	↓	↓	↓	.177	.787	.357
183	↓	↓	b	D	↓	↓	↓	↓	↓	.177	.787	.357
184	↓	↓	d	A	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
185	↓	↓	d	B	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
186	↓	↓	d	C	↓	↓	↓	↓	↓	.481 ±.020	1.091	.661
187	↓	↓	d	A	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
188	↓	↓	d	B	↓	↓	↓	↓	↓	.665 ±.020	1.275	.845
189	↓	↓	d	C	5.100	5.260	5.150	5.575	5.835	.665 ±.020	1.275	.845

FIGURE 1. Type AD connectors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Polarizing key slots: For contact polarization, slots shall be centered between contact positions, and shall accept keys supplied with the connector. Five keys shall be supplied with each connector. When fully seated into connector key slot, the dimension which the key extends above the key slot is .025 inch maximum. The thickness of the key shall be .026 ±.008 inch.

Contact current rating: 3 amperes.

Total engagement force (styles 40 and 50 only):

Number of contact positions	Maximum board insertion force (gage)
40	51
50	63

Part number: M21097/23- (dash number from figure 1).

Qualification and group B inspection: When connector assemblies covering a range of styles, types, mountings and classes with the same design are submitted for inspection at the same time, the requirements of table I apply.

TABLE I. Group submission.

Dash number 1/	Samples (Inspection per tables IX and XII in MIL-C-21097)			
	Group I	Group II	Group III	Group IV
145	1		1	
149	1		1	
Ⓑ 150		1		1 3/
162		1		1 3/
003	2			
013		2 2/		
Ⓑ 022	2			
036		2 2/		
045	2			
051		2 2/		
065	2			
072		2 2/		
074	2			
084		2 2/		
091	2			
104		2 2/		
116	2			
125		2 2/		
129	2			
144		2 2/		

1/ Table shows sample selection for size 2, style 15 (shortest) connector to style 50 (longest) connector. For test programs not including the full range of styles or covering features of type or size not covered by this table, the test program shall be established in accordance with the guidelines reflected in this table.

2/ Only the following tests of group II are applicable:
Visual and mechanical examination
Board insertion force
Durability

3/ Not applicable for group B inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - MI
Navy - AS
Air Force - 11
DLA - ES

User activities:
Army - AR, ME, AV, AT
Navy - SH, MC, OS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3270)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS. This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-21097/23B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

OLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360
ATTN: ELEX 8111

OLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.