MILITARY SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, PRINTED WIRING BOARD, RECEPTACLE, CARD INSERTION, CONTACT SPACING (.050), TYPE AD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-21097.

NOT FOR USE IN AIRBORNE EQUIPMENT.	INACTIVE FOR NEW DESIGN OF ARMY EQUIPMENT AS OF 26 March 1975.


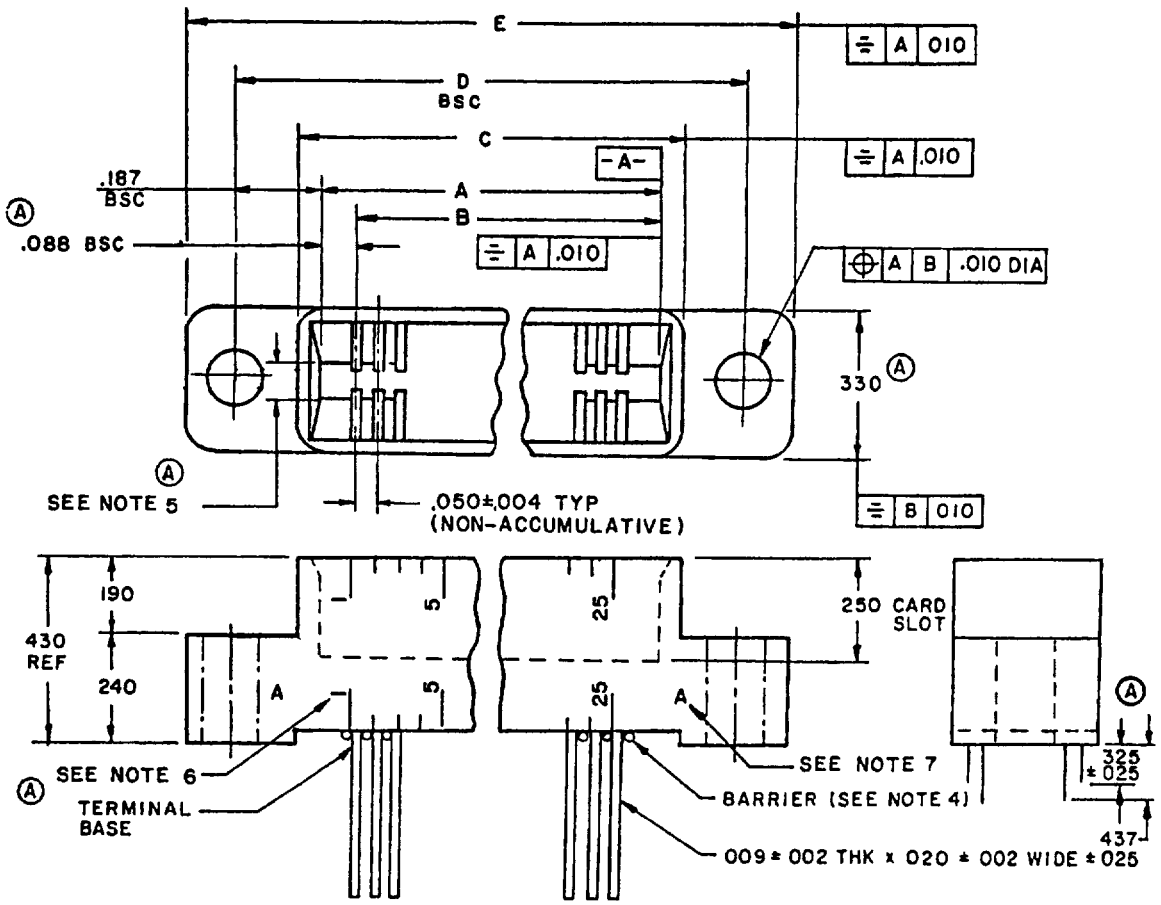



FIGURE 1. Connector, type AD.

(A) Denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

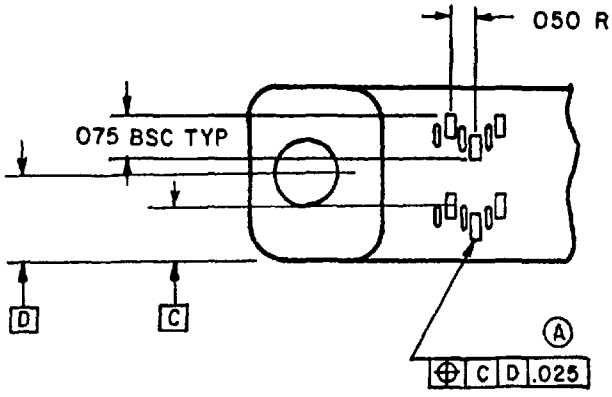

INCHES	MM
.002	05
.003	.08
.004	.10
.005	.13
009	.23
.010	25
.020	.51
.025	64
.050	1 27
.075	1 91
.088	2.24
112	2 83
.125	3.18
.187	4.75
.190	4.83
240	6 10
.250	6.35
325	8.26
.330	8.38
332	8 43
.430	10 92
.437	11 10

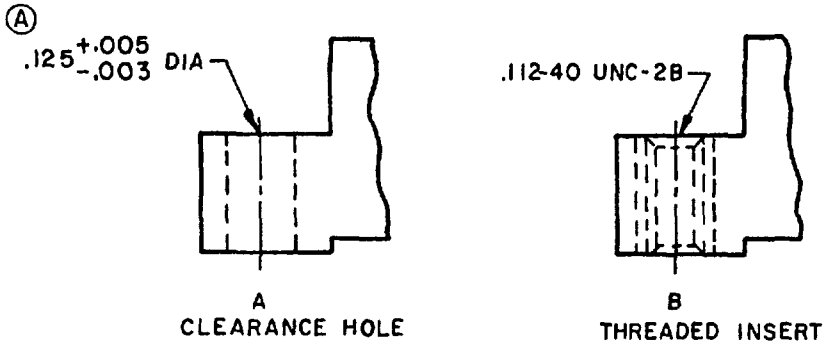

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) for three place decimals.
4. The shape of the barriers is optional except that barriers shall not protrude beyond the underside of the mounting flange.
Ⓐ 5. Slot shall accept the following thickness printed wiring board: size 2 - .054 (1.37 mm) to .071 (1.79 mm). Slot shall prevent entry of a printed wiring board having the following thickness: size 2 - .084 (2.13 mm).
6. Cavity identification numbers to be .06 (1.52 mm) high. Division markers to be .12 (3.05 mm) long for numbers 1, 5, 10, 15, etc. Intermediate markers to be .06 (1.52 mm) long. Marking typical 2 sides.
7. Side identification letters to be .12 (3.05 mm) high (A) near side, (B) far side.

FIGURE 2. Mounting provisions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table I.

Class: Symbol b (plug in).

Style. See table I.

Ⓐ Spring contact material: Copper alloy in accordance with QQ-B-750; gold plated-type II, class 1 - in accordance with MIL-G-45204.

Individual contact separation: 1/2 ounce

Individual contact separation after durability: 1/2 ounce.

Contact current rating: 1.0 ampere.

Wiring: Connectors shall be wired using #30 AWG wire.

Part number: M21097/25-(and dash number from table I)

TABLE I. Connector, electrical, printed wiring board receptacle.

	Dash number	Style	Mounting provision	Ⓐ Dimensions 1/ A ±.005(.13)	B ±.005(.13)	C ±.010(.25)	D ±.005(.13)	E ±.010(.25)
	001	6/12	A	.426	.250	.520	.800	1.020
	002		B	(10.82)	(6.35)	(13.21)	(20.32)	(25.90)
	003	9/18	A	.576	.400	.670	.950	1.170
	004		B	(14.62)	(10.16)	(17.02)	(24.13)	(29.72)
Ⓐ	005	10/20	A	.626	.450	.720	1.000	1.220
	006		B	(15.90)	(11.43)	(18.29)	(25.40)	(30.99)
Ⓐ	007	14/28	A	.826	.650	.920	1.200	1.420
	008		B	(20.98)	(16.51)	(23.37)	(30.48)	(36.07)
Ⓐ	009	15/30	A	.876	.700	.970	1.250	1.470
	010		B	(22.25)	(17.78)	(24.64)	(31.75)	(37.34)
Ⓐ	011	22/44	A	1.226	1.050	1.320	1.600	1.820
	012		B	(31.14)	(26.67)	(33.53)	(40.64)	(46.23)
Ⓐ	013	25/50	A	1.376	1.200	1.470	1.750	1.970
	014		B	(34.95)	(30.48)	(37.34)	(44.45)	(50.04)
	015	30/60	A	1.626	1.450	1.720	2.000	2.200
	016		B	(41.30)	(36.83)	(43.69)	(50.80)	(55.88)
	017	34/68	A	1.826	1.650	1.920	2.200	2.420
	018		B	(46.38)	(41.91)	(48.77)	(55.88)	(61.47)
Ⓐ	019	40/80	A	2.126	1.950	2.220	2.500	2.720
	020		B	(54.00)	(49.53)	(56.39)	(63.50)	(69.09)
Ⓐ	021	50/100	A	2.626	2.450	2.720	3.000	3.220
	022		B	(66.70)	(62.23)	(69.09)	(76.20)	(81.79)
Ⓐ	023	55/110	A	2.876	2.700	2.970	3.250	3.470
	024		B	(73.05)	(68.58)	(75.44)	(82.55)	(88.14)
Ⓐ	025	60/120	A	3.126	2.950	3.220	3.500	3.720
	026		B	(79.40)	(74.93)	(81.79)	(88.90)	(94.49)
Ⓐ	027	64/128	A	3.326	3.150	3.420	3.700	3.920
	028		B	(84.48)	(80.01)	(86.87)	(93.98)	(99.57)
Ⓐ	029	66/132	A	3.426	3.250	3.520	3.800	4.020
	030		B	(87.02)	(82.55)	(89.41)	(96.52)	(102.11)

1/ Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-19T08:53Z
Check the source to verify that this is the current version before use.

Custodians
Army -
Navy - EC
Air Force - 17

Review activities
Army - MI, AT, AV
Air Force - 85, 99
DLA - ES

User activities.
Army - ME, WC
Navy - MC, OS

Preparing activity.
Navy - EC

Agent.
DLA - ES

(Project 5935-3073-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS. This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-C-21097/25A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WOPDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

U.S.MAIL

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:53Z
Check the source to verify that this is the current version before use.