INCH-POUND

MIL-H-21155D(MC)
16 April 1990
SUPERSEDING
MIL-H-21155C(MC)
13 September 1982

MILITARY SPECIFICATION

HARDWARE: FOR BELT, MILITARY POLICE

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for one type highly-polished brass buckle, keeper, slide, and snap fasteners.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: The Commandant of the Marine Corps (PSE), Headquarters, U.S. Marine Corps, Washington, D.C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end this document or by letter.

AMSC-NA

FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

UU-P-553	-	Paper, Wrapping, Tissue.
PPP-B-676	-	Boxes, Setup.

MILITARY

MIL-F-10884	-	Fasteners, Snap.
MIL-I-15665/23	-	Insignia, Service Cap, Enlisted Personnel; Marine Corps.
MIL-B-17757	-	Boxes, Shipping, Fiberboard (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-151	-	Metals: Test Methods.

MILITARY

MIL-STD-105	-	Sampling Procedures And Table For Inspection By Attributes.
MIL-STD-129	-	Marking For Shipment And Storage.
MS27980	-	Fasteners, Snap, Style 2 (Regular Wire Spring Clamp Type).
MS27981	-	Fasteners, Snap, Style 2A (Small Wire Spring Clamp Type).

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robins Avenue, Philadelphia, PA 1911-5094)

2.1.2 Other Government documents, drawings, and publications. The following other Government document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issue is that cited in the solicitation.

LAWS AND REGULATIONS

U.S. Postal Service Manual

(Application for copies of the document should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington D.C. 20036.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of the specification shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard Samples. Standard Samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.3 Materials. When tested as specified in 4.5.1 and 4.6.1, the buckle (including brass rod), keeper, slide, and the shell of the snap fastener cap shall be made of a copper base alloy having a chemical composition of 84.0 to 86.0 percent copper, 0.05 percent maximum lead, 0.05 percent maximum iron, 0.015 percent maximum total other elements and the remaining percent zinc. The copper base alloy shall be free from pits, scale (including red oxide), dents, nicks, cracks, deep scratches, segregations, and foreign inclusions which cannot be removed in later processing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

3.4 Design. The design of the buckle, keeper, slide, and snap fasteners shall conform in all respects to U.S. Marine Corps design on figure 1 and the following:

3.4.1 Buckle. The buckle shall have a removable Marine Corps insignia, two belt fasteners, and a brass rod at each side to engage the belt fasteners, as shown in figure 1. The overall length of the brass rods and the shoulder length at each end of the rods shall be such that after assembly of the rods to the buckle, the ends of the rods shall be flush with the top and bottom sides of the buckle. The belt fastener for the left side of the buckle shall be permanently attached to the brass rod and shall be free rolling around the rod after attachment. Two 1/8 to 3/16 inch diameter holes shall be made through the front of the buckle for attaching the Marine Corp insignia. The holes shall be made to correspond with the position of the screw posts on the insignia and placed so that when the insignia is attached, it will be centered vertically and horizontally on the buckle with the eagle upright.

3.4.2 Insignia. The Marine Corp insignia for the buckle shall conform to MIL-I-15665/23, dash 1, finish 1, except it shall be provided with two screw posts and brass knurled nuts, without washers and the back of the insignia shall be dabbed to a 10-1/8 inch radius so that a closer fit exists between the face of the buckle and the emblem. The screw posts shall be positioned on the back of the insignia as shown on figure 1, and shall be 3/16 to 1/4 inch long after hard soldering to the insignia.

3.4.3 Keeper and slide. The keeper and slide shall conform to figure 1. Two keepers and one slide are required for each belt.

3.4.4 Snap fasteners. The snap fasteners shall conform to MIL-F-10884 except button diameters shall be 6/10 inch and the material and finish for the shell of the button shall be as specified in 3.3. and 3.5. The snap fasteners for securing the ends of the pistol belt shall be brass conforming to style 2A; finish 1; MS27981 parts nos. 1 (construction A), 3, 4, and 6. The snap fasteners for securing the ammunition magazine to the pistol belt shall be brass conforming to style 2; finish 1; MS27980 part nos. 1 (construction A) and 6.

3.5 Construction. The construction of the buckle, keeper, slide, and snap fastener cap shall match the approved sample for color and finish. The front, top and bottom outer surfaces of the buckle; front surface of the belt fasteners; front, back, top and bottom outer surfaces of the keeper; front and back surface and outer perimeter of the slide; and the outer surface of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

shell for the cap of the snap fasteners shall be highly polished to a mirror-like finish, free from pits, dents, nicks, scratches and other defects affecting the intended appearance. All other surfaces and edges shall be bright, clean, smooth, and free from burrs, tool marks, sharp edges, and roughness.

3.6 Finished measurements. The finished buckle, slide, and keeper shall conform to the measurements specified in figure 1. The snap fasteners shall conform to the measurement in 3.4.4.

3.7 Marking. The manufacturer's name, trade name, trademark, or other identifying mark and the letters "GI" shall be legible and inconspicuously stamped into the back of the buckle and keeper and into the back of the slide's center bar in such a way that the surface opposite the marking shall show no signs of penetration or unevenness, or cause distortion on any part of the items.

3.8 Workmanship. The buckle, keeper, slide and snap fastener shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements. This does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

4.1.2 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection Conditions. When specified in the contract or purchase order, all inspections shall be performed in accordance with MIL-STD-105.

4.4 First article inspection. When first article is required, inspection and testing shall be made on a completely fabricated snap fastener (each style), slide, buckle, and keeper for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications. Testing shall be performed on the copper base alloy referenced in 3.3 for chemical composition. The lot shall be expressed in terms of 1 pound and the requirements shall be applicable to lot average with two determinations for each element. The result shall be reported to the nearest 0.1 percent for copper and 0.01 percent for remaining elements. The sample unit shall be 8 ounces or equivalent of a composite sample.

4.5.2 Examination of the end item. The end item shall be examined for the defects listed in 4.5.2.1 and 4.5.2.2. The sample unit for these examinations shall be one buckle, slide, keeper, and snap fastener (each style). The inspection level shall be II (see 6.5).

4.5.2.1 General defects. General defects shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 20261O-19T09:00Z
Check the source to verify that this is the currentversion before use.

Examine	Defect		Classification Major	Minor A	Minor B
Color and finish	a.	Does not compare favorably with standard or approved sample.	101		
	b.	Front, top, and bottom outer surfaces of buckle; front surface of the belt fastener; shell of snap fastener cap (front surface of snap fasteners); front, back, top, and bottom outer surfaces of keeper; front and back surfaces and outer perimeter of slide are not highly polished to mirror-like finish.	102		
	c.	Abraded, scuffed, scratched or otherwise damaged.	103		
	d.	Stain or discoloration clearly noticeable.	104		
	e.	Buff, drab, or cloudy finish clearly noticeable.		201	
	f.	Segregations or foreign inclusions in the metal.	105		
Design	a.	Insignia design details are altered and do not conform to Government hub.	106		
	b.	Any significant detail of the insignia reduced or obliterated.	107		
Quality of metal	a.	Surface spotted or open grained, i.e., pitted, scaled (including red oxide), porous or crystalline.	108		

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:00Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Construction and workmanship	a. Metal cracked or fractured.	109		
	b. Any warp, twist, or distortion, producing irregular surface contour or outline.	110		
	c. Any detail struck over, resulting in double impression.	111		
	d. Not trimmed to the die-struck edge.	112		
	e. Burr, fin, rough or sharp edge, drag, step, or tool marks.	113		
	f. Metal torn or broken out by use of forcer.	114		
	g. Dent, dig, gouge, nick, deep scratch, metal mark, or mutilation.	115		
	h. Any component missing, damaged, malformed, bent, or otherwise defective.	116		
	i. Any corner or edge not slightly rounded or excessively rounded.	117		
	j. Soldered post not completely joined, i.e., any perceptible opening in joint.		202	
	k. Any solder spatter or discoloration on edge of insignia.	118		
	l. Ends of brass rods not		203	

Source: https://assist.dla.mil -- Downloaded: 20261O-19T09:00Z
Check the source to verify that this is the currentversion before use.

flush with sides of buckle.

Examine	Defect		Classification Major	Minor A	Minor B
	m.	Fastener not permanently attached to left rod.	119		
	n.	Permanently attached fastener does not freely rotate.		204	
	o.	Any area burned or reduced in soldering or acid cleaning, or flux not removed.		205	
	p.	Insignia not centered vertically and horizontally on the buckle with the eagle upright.	120		
	q.	Insignia does not fit flush against buckle front.	121		
Attaching device of insignia	a.	Defective, e.g., any part damaged or malformed, affecting use.	122		
	b.	Not positioned as specified.	123		
Identification marking	a.	Missing, illegible or incomplete.		206	
	b.	Penetration or markings to opposite surface, unevenness or distortion.	124		

4.5.2.2 Examination for dimensions. Any buckle, keeper, or slide which is not within the dimension tolerances specified on figure 1 shall be classified as defective. Snap fasteners which do not meet the dimensions specified in 3.4.4 shall be classified as a defect. Inspection level shall be S-2 (see 6.5).

4.5.3 Inspection of packaging. An inspection of packaging shall be made to determine compliance with the requirements of section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; or of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, or inadequate stapling. Unit package not properly sealed. Bulging or distortion of container.
Weight or content (exterior and interior)	Number of intermediate containers is more or less than required; gross/net weight exceeds requirements.

4.5.3.1 Examination for count in intermediate containers. Buckles, slides, keepers and snap fasteners packaged for shipment shall be examined to determine conformance with package markings and specific quality. The sample unit for this examination shall be one box (interior package). Any box containing less than the specified or marked quantity of buckles, slides, keepers or snap fasteners shall be classified as a defect. The inspection level shall be S-2 (see 6.5).

4.6 Tests.

4.6.1 Chemical composition test. Chemical composition shall be determined in accordance with Method III of FED-STD-151. Results shall be evaluated to determine compliance with the requirements in 3.3.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

5.1.1.1 Unit packaging. Each buckle, keeper, and slide shall be completely and individually wrapped with sufficient antitarnish tissue, conforming to type II, class 1 of UU-P-553, to protect the finish. In addition, the button portion of each snap fastener shall be individually wrapped with antitarnish tissue and packaged with the other snap fastener components in accordance with MIL-F-10884.

5.1.1.2 Intermediate packaging.

5.1.1.2.1 Buckle. Each buckle, packaged as specified in 5.1.1.1, shall be placed in a setup box conforming to type I, variety 1, class A, style 4 of PPP-B-676. The dimensions of the setup box shall be 5 inches in length, 3-1/2 inches in width and 1-1/8 inches in depth.

5.1.1.2.2 Keepers. Twelve (12) keepers, unit packaged as specified in 5.1.1.1, shall be placed in a setup box conforming to type I, variety 1, class A, style 4 of PPP-B-676. The dimensions of the setup box shall be 5-5/8 inches in length, 2-1/2 inches in width, and 1-1/8 inches in depth.

5.1.1.2.3 Slides. Twenty-five (25) slides, unit packaged as specified in 5.1.1.1, shall be placed in a setup box conforming to type I, variety 1, class A, style 4 of PPP-B-676. The dimensions of the setup box shall be 5 inches in length, 3-1/2 inches in width, and 1-1/8 inches in depth.

5.1.1.2.4 Snap fasteners. Snap fasteners shall be packaged as specified in MIL-F-10884.

5.1.2 Commercial. The buckle, slides, keepers, and snap fasteners shall be packaged in accordance with the manufacturer's commercial practice to ensure safe delivery at destination.

5.2 Packing. Packing for the buckle, keeper and slide shall be level B or commercial as specified (see 6.2). Packing for snap fasteners shall be level B, commercial or MIL-F-10884 as specified (see 6.2).

5.2.1 Level B. Fifty-four (54) buckles (54 intermediate packages), 864 keepers (72 intermediate packages), or 1,350 slides (54 intermediate packages), packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to class domestic, variety DW, grade 275, size 1A of MIL-B-17757. Shipping containers shall be assembled and closed as specified in the appendix to the box specification.

5.2.3 Commercial. Buckles, keepers, and slides, packaged

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The buckle, keeper, slide, and snap fastener covered by the specification are used on the military police belt.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Whether first article is required (see 3.2).

c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2)

d. Acceptance criteria required (see 6.5).

6.3 Samples. For information regarding availability of samples of the buckle, slide, keeper, and snap fastener, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units (DHUs) of 2.5 for major defects and 10.0 for total (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of DHUs, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of DHUs, of 2.5 is recommended.

6.6 Figures. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the specification and the figure, the specification shall govern.

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.8 Subject Term (Key Word) Listing.

Buckle
Keeper
Slide
Snap fastener

Preparing Activity:
Navy - MC
(Project No. 8465-NO53)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

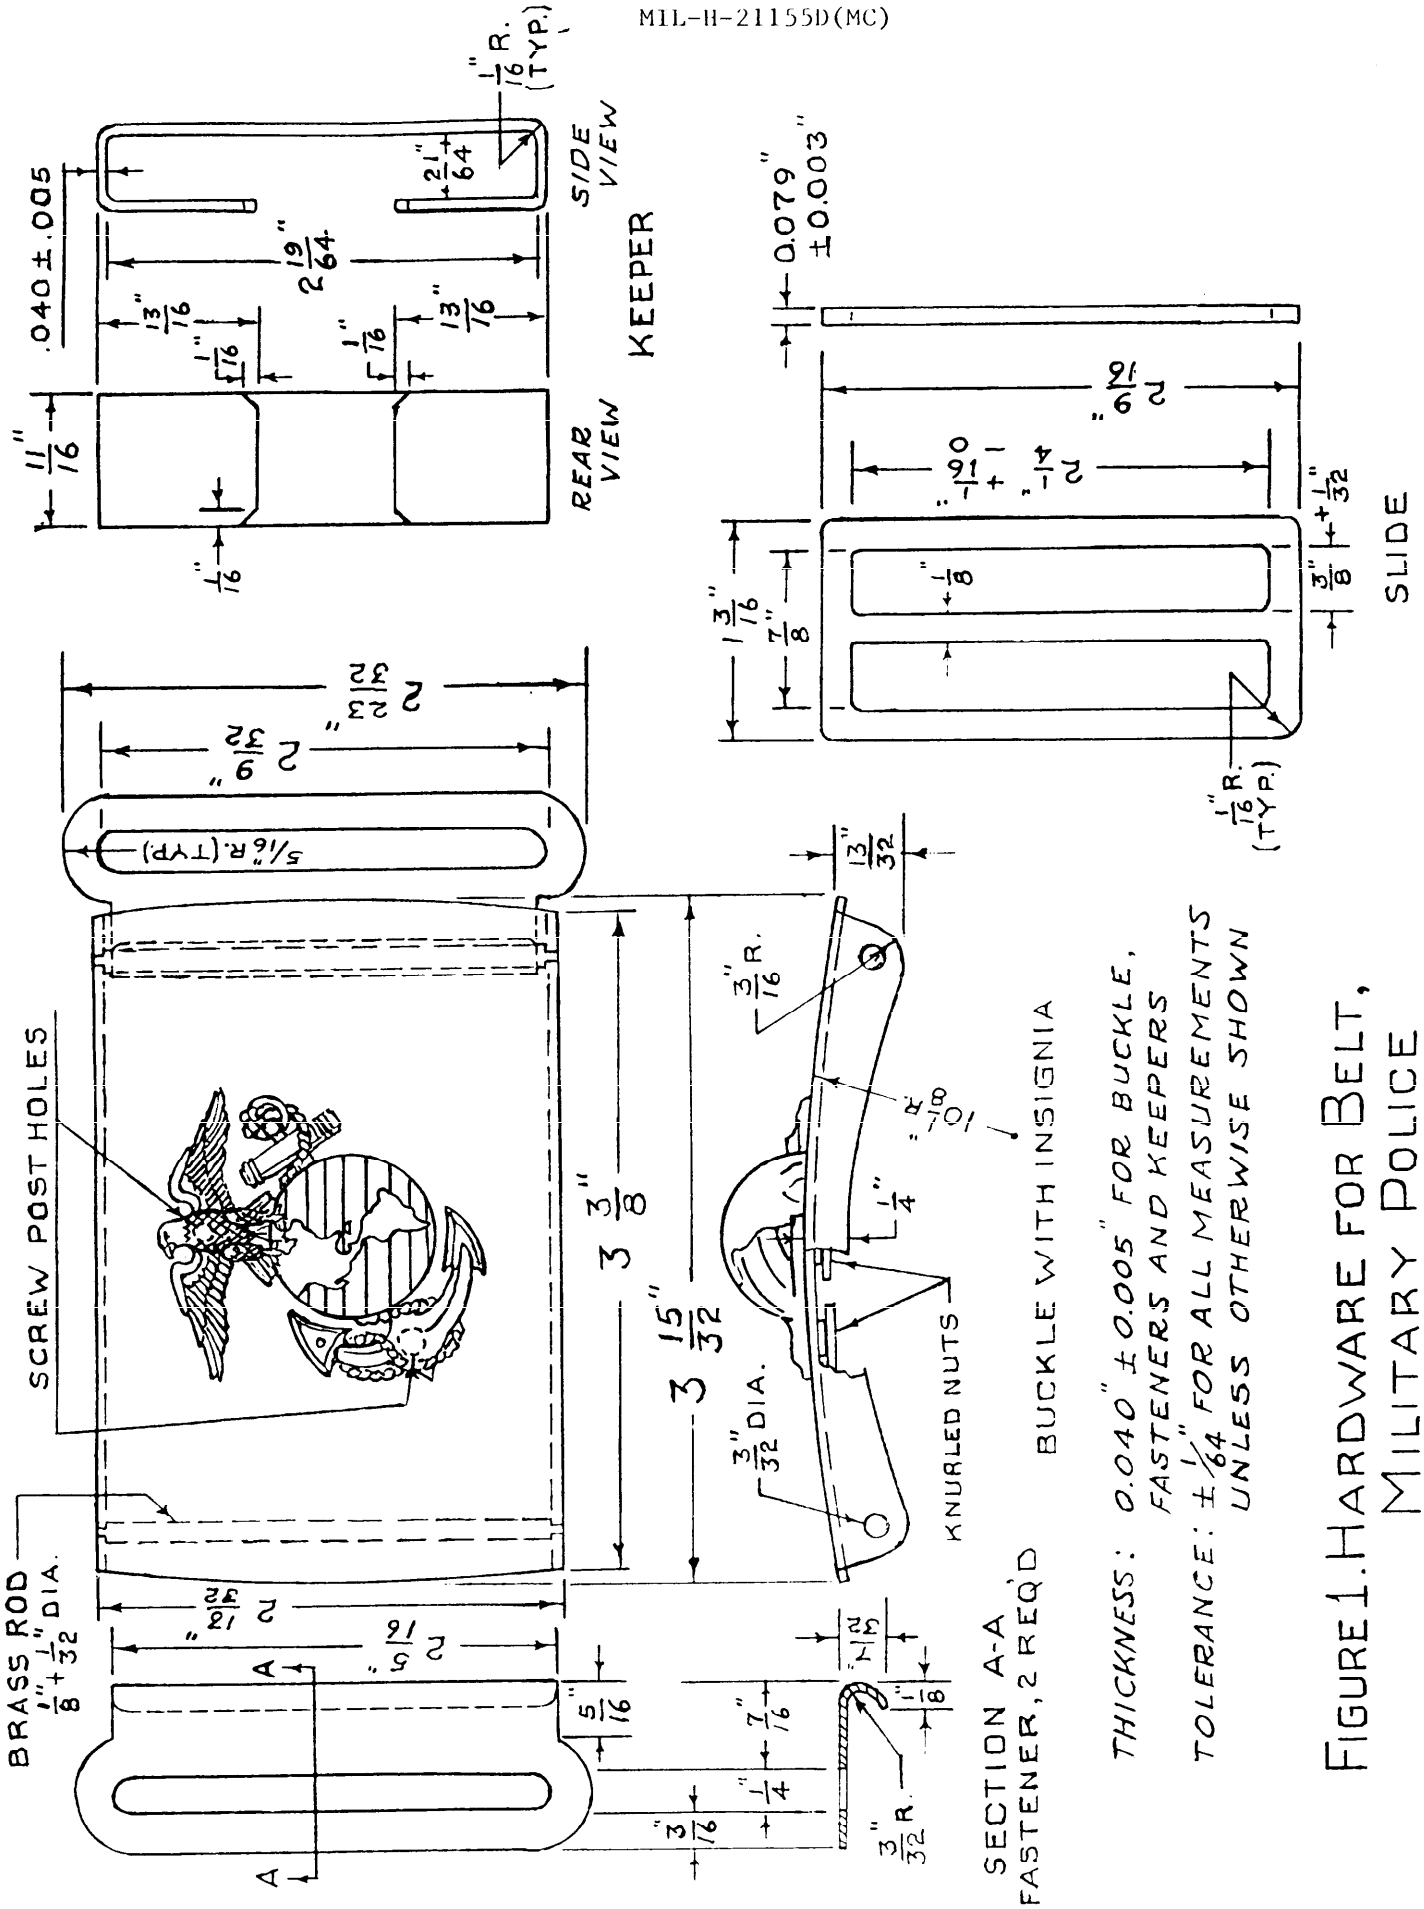


FIGURE 1. HARDWARE FOR BELT, MILITARY POLICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-H-21155D(MC)	16 April 1990

3. DOCUMENT TITLE
HARDWARE: FOR BELT, MILITARY POLICE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	(202) 696-1186/87/88	226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, D. C. 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:00Z
Check the source to verify that this is the current version before use.