MIL-C-22954B(EC)
7 January 1970
SUPERSEDING
MIL-C-22954A(SHIPS)
18 May 1962

MILITARY SPECIFICATION

CONTROL, RADIO SET C-1138( )/UR

1. SCOPE

1.1. This specification covers Control, Radio Set C-1138( )/UR which is intended to provide a means for remote control of radiophone transmitting equipment used aboard all types and classes of Naval Ships.

2. APPLICABLE DOCUMENTS

2.1. The following documents of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

- MIL-R-19 — Resistor, Variable, Wirewound, (Low Operating Temperature), General Specification For.
- MIL-R-26 — Resistor, Fixed, Wirewound (Power Type).
- MIL-T-27 — Transformer and Inductor, (Audio, Power, and High Power Pulse).
- MIL-C-62 — Capacitor, Fixed, Electrolytic (DC, Aluminum Dry Electrolytic, Polarized), General Specification for
- MIL-R-94 — Resistor, Variable, Composition, General Specification for
- MIL-R-94/5 — Resistors, Variable, Composition, Style RV4
- MIL-J-641 — Jack, Telephone, General Specification for
- MIL-S-901 — Shock Tests, H.I. (High-Impact) Shipboard Machinery, Equipment and Systems Requirements for
- MIL-C-915 — Cable, Electrical, Special Purpose, General Specification for
- MIL-C-2194 — Cable, Power And Control, Reduced Diameter Types (Shipboard Use)
- MIL-L-3661 — Lampholder, Indicator Lights, Indicator-light Housings, And Indicator-light Lenses, General Specification for
- MIL-C-5015 — Connectors, Electric, "AN" Type.
- MIL-R-5757 — Relay Electrical, (for Electronic and Communication-Type-Equipment), General Specification for
- MIL-E-16400 — Electronic Equipment, Naval Ship and Shore; General Specification
- MIL-W-16878 — Wire Electrical (Insulated, High Temperature).
- MIL-E-17555 — Electronic and Electrical Equipment, Accessories, and Repair Parts, Packaging And Packing of
- MIL-I-45208 — Inspection System Requirements

STANDARDS

MILITARY

- MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes
- MIL-STD-108 — Definitions and Basic Requirements for Enclosures for Electric and Electronic Equipment.
- MIL-STD-242 — Electronic Equipment Parts (Selected Standards).
- MIL-STD-415 — Tests Points and Test Facilities for Electronic Systems and Associated Equipment Design Standard For.
- MIL-STD-454 — Standard General Requirements For Electronic Equipment
- MS-3102 — Connector, Receptacle Electric, Box Mounting.
- MS-15567 — Lamp, Incandescent, S-6 Bayonet Candelabra, Double Contact

FSC 5820

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications, required by suppliers in connection with specific procurement functions shall be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article sample.- Prior to beginning production, a sample shall be tested as specified in 4.3 (see 6.2).

3.2 General requirement.- The equipment shall be in accordance with MIL-E-16400, as specified herein. Each control equipment shall be suitable for its intended purpose in the Naval communications services, when installed aboard Navy ships and when subjected to the adverse conditions normally encountered in shipboard service.

3.2.1. Material.- All material used in the equipment shall be in accordance with MIL-E-16400 in the following areas, Unacceptable materials, Aluminum, Protection of aluminum and aluminum alloys.

3.2.2. All parts used in the equipment shall be in accordance with MIL-E-16400 in the areas that follow, Selection of parts, Standard parts, Non-standard parts, Design application, Individual selection, Tolerances, Interchangeability, Identification (color) coding, Connectors general, Screw threads, Securing complete items, Material threaded devices, Thread projection, Nuts, Thread locking devices.

3.2.3 Test points and test features.- Tests points shall be provided in accordance with the requirements of MIL-STD-415.

3.2.4 Tropicalization.- Tropicalization of the complete control equipment or any part thereof, will not be required.

3.2.5 Blown fuse indicators.- Blown fuse indicators are not required.

3.2.6 Temperature.- The equipment shall meet the temperature conditions of class 4 of MIL-E-16400.

3.2.7 Magnetic characteristics.- The equipment shall conform to the applicable requirements of MIL-E-16400 for Magnetic characteristics.

3.2.8 Safety.- All safety shall be in accordance with requirement 1 of MIL-STD-454.

3.3 Control knobs.- Tactile identification form for the control knobs is not required. The control knob for the earphone level control shall comply with MIL-STD-242.

3.4 Locking device.- A locking device shall be provided for earphone muting control, R-104 (see figure 2). This device shall be positive in action; the adjustment of the muting control shall not be altered when secured by the locking device; and the locking action shall not be abrogated when the equipment is subjected to shock or vibration.

3.5 Control circuit power.- Power for all relays, control circuits and indicating lamps will be obtained from external power sources of 115/220 volts d.c. or 60 cycles, alternating current (a.c.) and 12 volts direct current (d.c.). The specified external power sources are expressed as nominal ratings.

3.6 Cabinet assembly.- The equipment shall be enclosed in a cabinet assembly provided with a cover hinged at the front bottom edge as depicted on figure 1. The cabinet shall be of aluminum construction, (see 3.2.).

3.6.1 Type of enclosure.- The cabinet assembly for the control equipment shall be totally enclosed in accordance with Table I of MIL-STD-108.

3.6.2 Mechanical design.- The mechanical design of the equipment shall conform to MIL-E-16400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

3.6.3 Coating and treatments.- The painting of the enclosure shall conform to MIL-E-16400. The colors of the fasteners and assembly screws shall conform to MIL-E-16400.

3.6.4 Front panel.- The front panel shall be hinged to the bottom edge of the cabinet assembly with a continuous "piano" type hinge, and secured at each top corner with a captive thumb screw. The heads of the thumb screws shall be slotted for screwdriver tightening or loosening. The hinge pin shall be removable and shall be fabricated from noncorrosive material. The panel shall rotate 180 degrees for its fully open position. The front panel layout shall be as shown on figure 1.

3.6.4.1 The cabling from the front panel to the rear mounted terminal strips shall be laced, fanned and lugged to enable removal and replacement of the functional part of the equipment for maintenance in a minimum of time.

3.6.4.2 Hinge pin removal shall require no special tools.

3.6.5 Cable entrance.- Provision shall be made for the entry of external interconnecting cables into any of the four sides (namely top, bottom and both end sides) of the cabinet assembly. Each of the specified sides shall be fitted with removable entry plates that shall individually be capable of accommodating fittings for securing one type MSCA-14 cable, in accordance with MIL-C-2194, two type TTHFWA-1-1/2 cables and one type TTHEWA-3 cable in accordance with MIL-C-915. The entry plates shall be furnished undrilled for cable fittings. No fittings or cables shall be supplied by the manufacturer of the control equipment.

3.6.6 Internal wiring.- The internal wiring shall be type C in accordance with MIL-W-16878. The "START-STOP" circuits and keying circuits shall be wired with type C-16 wire. The remaining circuits shall be wired with type C-20 wire.

3.6.7 Terminal boards.- The terminal boards for the connection of external cables, shall be secured to the inside rear of the cabinet assembly and shall be conveniently accessible when the front panel is in its fully open position. Terminal boards shall conform with the requirements of MIL-E-16400 and shall provide for the number of marked terminals, shown on figure 2. A separate terminal board bearing terminals 13 through 20 may be provided, (see figure 2). Terminals 1 through 12 (see figure 2) shall be of sufficient size as to individually accommodate one conductor of a type MSCA cable in accordance with MIL-C-2194. Terminals 13, 14, 19, 20, A', B', A, B, C, D and E (see figure 2) shall be of sufficient size to individually accommodate one conductor of type TTHFWA cable in accordance with MIL-C-915. The spare terminal dimensions shall be appropriate to the foregoing cable conductors.

3.7 Overall dimensions: - Width - 8 inches
Depth - $7\frac{1}{2}$ inches
Height - $5\frac{1}{2}$ inches

3.8 Weight.- The weight of the equipment shall not exceed 10 pounds.

3.9 Inclination, shock and vibration.- The control equipment shall be capable of withstanding inclination, shock and vibration as specified in MIL-E-16400 without the use of resilient mounts.

3.10 Parts requirements.- The component parts required for the control equipment and specifically identified herein, shall be selected in accordance with the requirements of 3.2.2 whenever such selection provides electrical and mechanical interchangeability with the individual parts covered by the referenced specifications in 3.10.1.

3.10.1 All parts, except the terminal strips for external connections, shall be mounted on the front panel, either directly or on a chassis attached to the front panel. The arrangement and mounting of the parts shall afford accessibility for their individual inspection, maintenance, and replacement without damage to other parts when the front panel is in its fully opened position. The control equipment shall include the following parts, wired and interconnected as shown on figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

(a) C-101 - Capacitor, fixed, plug-in electrolytic - 100 microfarads, 25 volts DCWV, in accordance with MIL-C-62.
(b) I-101 - Indicator lamp assembly with red jewel conforming to style LH80/1 in accordance with MIL-L-3661. The indicator lamp shall be a 120 volt, 6 watt (nominal rating) incandescent, candelabra base, Type S-6, with clear bulb, in accordance with MS-15567.
(c) I-102 - Indicator lamp assembly with green jewel, conforming with MIL-L-3661. The indicator lamp shall be a commercial type 1813, 12-18 volt, 0.1 ampere (nominal ratings) *incandescent with miniature bayonet base and type T-3-1/4 clear bulb.*
(d) J-101 - Connector, receptacle, female 5-contact, in accordance with MS3102-14S-5S, or or equivalent, as specified in MIL-C-5015.
(e) J-102 - Jack telephone; Material, finish and circuit equivalent to type JJ-083 jack, in accordance with MIL-J-641.
(f) J-103 - Jack, telephone; Switchcraft IJ1747A or equivalent, finish and circuitry in accordance with MIL-J-641.
(g) J-104 - Jack, telephone; Switchcraft IJ1747A or equivalent in accordance with MIL-J-641.
(h) K-101 - Relay 6 pole double throw, 12 volt, direct current (d.c.) 125 milliampere, maximum; capable of normal operation between 8.5 and 15 volts, d.c. contacts shall be capable of carrying 0.5 amperes 25 volts a.c. or d.c. This relay shall conform with the requirements of MIL-R-5757 applicable to sealed enclosure.
(i) R-101 - Resistor, fixed, wirewound, of resistance value and power dissipation ratings necessary to reduce voltage to I-101 to 115 volts, a.c. when the equipment is operating on 230 volts, a.c. Provisions shall be made for shorting this resistor out of the circuit when the equipment is operated from 115 volts a.c., in accordance with MIL-R-26.
(j) R-102 - Resistor, fixed, wirewound, 160 ohms ±5 percent, 2 watts, secured with a metal mounting clamp, in accordance with MIL-R-26.
(k) R-103 - Resistor, variable, constant input impedance of 600 ohms, 1 watt, approximately uniform attenuation per degree rotation, 40 decibels (db) attenuation range (nominal ratings) in accordance with MIL-R-19.
(l) R-104 - Resistor, variable, 25,000 ohms 2 watts, screwdriver adjustable with lock nut provided, in accordance with MIL-R-94.
(m) S-101 - Switch, normally open, two button with momentary contacts capable of carrying 1 ampere at 350 volts, 60 cycles a.c. with a provision to prevent both operations simultaneously.
(n) T-101 - Transformer, audio frequency (a.f.); line type; primary impedance -25 ohms, (rated;) secondary load 600 ohms (rated); in accordance with MIL-T-27.

3.10.2 Jacks.- All jacks, microphone, head telephone and keys shall be insulated from the front panel to withstand a peak potential of 1000 volts, a.c., and shall otherwise be so constructed and mounted as to preclude shock to operating personnel when the contract equipment is operated under adverse climatic conditions aboard ship.

3.10.3 Relays.- The relay (see K-101, figure 2) shall be of such design as to provide reliable operation when the control equipment is subjected to shock and vibration and when the relay is connected to an external power source of 12 volts (nominal ratings). The relay shall be capable of providing the foregoing reliability of operation when the external power source falls as low as 8.5 volts. Reliability of operation shall be predicated upon normal relay functioning, without sticking or chattering under the foregoing conditions. Additionally, the relays shall be capable of continuous operation, without abrogation of its reliability and without damage to its coil from over heating, when the external supply voltage is 15 volts d.c. (nominal rating).

3.11 Controls.- Controls shall be considered in two groups: one group designated as operating and one group as semioperating.

3.11.1 Operating controls.- The following controls shall be mounted on the front panel. (See figure 1.)

(a) Transmitter "START-STOP" switch
(b) "EARPHONE LEVEL" control

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

3.11.1.1 Transmitter control.- The transmitter "START-STOP" shall be wired as shown on figure 2 for S-101. It shall function to apply or remove power to or from an externally connected radio transmitter. The title "TRANSMITTER" shall appear on the front panel below the switch. The top push button shall be black with the subtitle, "START" engraved on its face. The lower push button shall be used with the subtitle "STOP" engraved on its face.

3.11.1.2 Power indicator.- Indicator lamp, red lens (see I-101, figure 2) shall be mounted above switch, S-101 to indicate when power is applied to the externally connected transmitters. The title "POWER" shall appear on the front panel above the indicator lamp bezel.

3.11.1.3 Carrier-on-indicator.- Indicator lamp, green lens (see I-102, figure 2) shall be mounted on the front panel to indicate the carrier on condition of the externally connected radio transmitter. The title "CARRIER ON" shall be arranged above the indicator lamp bezel.

3.11.1.4 Earphone level control.- An attenuator (see R-103, figure 2) shall be provided on the front panel to control the earphone level from the externally connected radio receiver. The title "EARPHONE LEVEL" shall be arranged under the control knob on the front panel. The numerals "0 through 10" shall appear on the front panel, equally spaced throughout the rotation of the earphone level control shaft, with "0" at the extreme counterclockwise position and "10" at the extreme clockwise position. Minimum attenuation offered by this control shall occur with full clockwise rotation of its shaft.

3.11.1.5 Front panel outlets.- The following outlets shall be provided on the front panel and title as follows: (see figure 1).

3.11.1.5.1 Portable hand key jack.- The title "KEY" shall appear below the jack (see J-104, figure 2). This jack shall be provided to permit the use of a portable hand key.

3.11.1.5.2 Head telephone jack.- The title "PHONES" shall appear below the jack (see J-103, figure 2). This jack shall be provided to permit the use of head telephones.

3.11.1.5.3 Microphone jack.- The title "MICROPHONE" shall appear below the jack (see J-102, figure 2). The jack shall be provided to permit the use of a hand microphone.

3.11.1.5.4 Handset-or chestset jack.- The title "HANDSET OR CHESTSET" shall appear below the connector (see J-101, figure 2), which shall be provided to permit the use of an externally connected handset or chestset. The handset or chestset shall not be furnished with the control equipment.

3.11.1.6 Card holder.- A card holder shall be provided on the front panel to accommodate a card measuring 1 by 2-1/2 inches. The holder shall permit the easy removal of the card without the use of tools. The cards shall be white and of material of sufficient surface durability as to be suitable to receive repeated applications and erasures of lead penciled notations. (See figure 1.)

3.11.2 Muting control.- A single section resistor type RV4LAYSA253A in accordance with MIL-R-94/5 shall be mounted behind the front panel, easily accessible when the front panel is open. Reference designation R-104 and the title "Muting Control" shall be marked on the chassis adjacent to the muting control.

3.12 Workmanship.- Workmanship shall be as specified in MIL-E-16400.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

4.1.1 Contractors quality assurance.- The Contractor shall provide and maintain an effective inspection and quality assurance system acceptable to the Government. The inspection system shall conform to the requirements of MIL-I-45208. A current written description of the means by which the Contractor will assure the quality of products shall be submitted to the cognizant Government inspector for evaluation. The written description shall include flow charts showing complete flow of material from inspection on receipt through all manufacturing processes to final shipment. The various process and inspection positions shall be clearly identified on the flow charts and cross-referenced to the detailed inspection procedures and criteria of the written description. Any changes to the procedures or the described system shall be submitted to the Government inspector for evaluation prior to use.

4.1.2 Government verification.- All quality assurance operations performed by the Contractor will be subject to Government verification at any time. Verification will consist of (a) surveillance of the operations to determine that practices, methods, and procedures of the written system description are being properly applied, (b) Government product inspection to measure quality of product to be offered for acceptance, and (c) Government product inspection of delivered products to assure compliance with all requirements of this specification. Failure of the Contractor to promptly correct deficiencies discovered by him or of which he is notified shall be cause for suspension of acceptance until corrective action has been made or until conformance of product to prescribed criteria has been demonstrated.

4.1.3 Test procedures.- The Contractor shall submit written test procedures including test equipment and tolerance limits to be used for first article inspection and quality conformance inspection to the procuring activity, via the Government inspector for review and approval prior to beginning tests. Each test shall be identified in accordance with paragraph 4.2 as to classification.

4.1.3.1 Procedures for inspections, tests, demonstrations, etc. shall contain step by step information which will enable the operator to properly perform the requirements of this specification. The method of examination shall be clearly defined.

4.1.3.2 The procedures shall contain a list of test equipment identified by name and model. Special test equipment shall also be listed and identified.

4.1.3.3 Data sheets shall be included in the procedures. Performance parameters shall be clearly indicated with tolerance limits. Whenever quantitative measurements are made, the result shall be shown by quantitative data.

4.2 Classification of inspections.- The inspections specified herein are classified as follows:

(a) First article inspection
(b) Quality conformance inspection
    (1) Production inspection
    (2) Production control inspection
    (3) Environmental tests
    (4) Inspection of preparation for delivery

4.3 First article inspection.- First article inspection shall consist of all examination and testing necessary to determine compliance with the requirements of this specification. The number of units of the control equipment to be subjected to first article inspection shall be as specified in the contract or order. (See 6.1.) First article inspection shall include all the tests specified in table I as a minimum.

TABLE I - First article inspection

Requirement	Reference
Surface examination	4.3.3
Operating test	3.5, 3.10.2, 4.3.1
Weights and dimensions	3.8, 3.7
Heat test	3.10.3, 4.3.2, 4.4.2.1
Supply line voltage	3.10.3., 3.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

TABLE I - First article inspection (continued)

Requirement	Reference
Temperature	3.2.6
Humidity	MIL-E-16400
Controls and control circuits	3.3, 3.4, 3.11
Accelerated life test	MIL-E-16400
Shock, vibration and inclination	3.4, 3.9
Salt spray test	MIL-E-16400
Magnetic test	MIL-E-16400

4.3.1 The operating test, specified in MIL-E-16400, shall consist of continuity, resistance and insulation tests followed by operating with simulated load conditions to check for proper operation of all relays, indicators and controls while using standard Navy handset phones and microphones.

4.3.2 The heat test shall be conducted with a simulated load of 1 ampere flowing through "START-STOP" switch (see S-101, figure 2), 75 milliamperes flowing through R-102 (see figure 2) and the primary of T-101 and relay K-101, (see figure 2) energized with 15 volts d.c..

4.3.3 Surface examination.- To verify compliance with paragraphs 3.2.1, 3.2.3, 3.2.4, 3.3, 3.4, 3.6 through 3.6.6, 3.10 through 3.10.2, 3.11.1 through 3.11.1.6 and 3.12, equipment shall be examined for the following:

a. Workmanship, assembly and fit, mechanical safety, and marking.
b. Materials, parts, and finish.
c. Treatment for prevention of corrosion.
d. Test points and test features.

4.3.4 First article inspection report.- A first article inspection report shall be prepared containing all the results of the first article inspection. The report shall include completed Form NAVEXOS 3373 as specified in MIL-S-901 for the shock test. The first article inspection report shall be submitted to the procuring activity, via the Government inspector, for review and approval. The first article inspection report shall indicate specification compliance limits as well as actual performance test results. The Contractor shall certify that, on the basis of the report, the equipment does or does not comply with specification requirements.

4.4 Quality conformance inspection.-

4.4.1 Production inspection.- Production inspection shall be made on every equipment offered for delivery. The inspection shall comprise such examination and testing as will prove the workmanship and reveal the omissions and errors of the production process such as functional and performance tests at a limited number of points, tests which detect deviations from design, tests of adjustment, and tests which detect hidden defects of material. Production inspection shall consist of the tests approved in accordance with paragraph 4.1.3 and shall include the requirements of Table II.

TABLE II - Production inspection

Requirement	Reference
Surface examination	4.3.3
Operating test	3.5, 3.10.2, 4.4.1.1

4.4.1.1 The operating test shall be conducted under the same conditions as specified in 4.3.1 herein.

4.4.2 Production control inspection.- Production control inspection, including sampling, shall conform to Table III below and to the procedures for general inspection levels of MIL-STD-105. Inspection level II shall be used for normal, tightened, and reduced inspection. Production control inspection shall be performed on equipments that have passed production inspection. Production control inspection procedures shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

approved in accordance with 4.1.3. The equipment shall satisfactorily meet the requirements of Production control inspection prior to release for shipment.

TABLE III - Production control inspection

Inspection	Inspection paragraph	AQL%
Weights and dimensions	3.7, 3.8	4.0
Heat test	3.10.3, 4.4.2.1	4.0
Controls and control circuits	3.3, 3.4, 3.11	4.0
Enclosure	3.6.1	4.0

4.4.2.1 The heat test shall be conducted under the same conditions as specified in 4.3.2 herein.

4.4.2.2 Rejected lots.- If an inspection lot is rejected, the Contractor may withdraw the lot from further inspection. The Contractor may also rework a rejected lot to correct the defective units and reinspect the lot using tightened inspection. Rejected lots shall be kept separate from new lots and shall not lose their identity.

4.4.3 Environmental tests.- Environmental tests shall be as listed in Table IV and shall be performed on units which have been subjected to and passed production inspection. Environmental test procedures shall be approved in accordance with 4.1.3.

TABLE IV - Environmental tests

Requirement	Reference
Temperature	3.2.6
Humidity	MIL-E-16400
Accelerated life test	MIL-E-16400
Shock, vibration and inclination	3.4, 3.9
Salt spray test	MIL-E-16400

4.4.3.1 Sampling for environmental inspection.- One control from the first twenty-five (25) production units shall be selected for test. Subsequently, one control from each successive one-hundred (100) units fabricated, or fraction thereof, shall be selected for test.

4.4.4 Nonconforming production control or environmental sample units.- If a sample unit fails the test specified in paragraphs 4.4.2 or 4.4.3, the Contractor shall immediately investigate the cause of failure and shall report to the Government inspector the results thereof and details of the corrective action taken to correct units of product which were manufactured with the same conditions, materials, processes; etc. If the Government inspector does not consider that the corrective action will enable the product to meet specified requirements, or if the Contractor cannot determine the cause of failure, the matter shall be referred to the Contracting Officer.

4.4.5 Reinspection of conforming production control and environmental sample units.- Unless otherwise specified in the contract, sample units which have been subjected to and passed production control or environmental tests may be accepted on the contract provided they are resubjected to and pass production inspection after repair of all damage.

4.4.6 Inspection of preparation for delivery.- Sample packages and packs and the inspection of the preservation and packaging, packing and marking for shipment and storage shall be in accordance with the requirements of section 5 and the documents specified therein.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements. Preparation for delivery requirements of referenced documents listed in Section 2 do not apply unless specifically stated in the contract or order. Preparation for delivery requirements for products procured by contractors shall be specified in the individual order.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

5.1 Preservation, packaging, packing and marking.- Unless otherwise specified, preparation for delivery shall be in accordance with the applicable levels of preservation, packaging, packing and marking specified in MIL-E-17555 (see 6.1.1).

6. NOTES

6.1 Ordering data.- Procurement documents should specify the following:

6.1.1 Procurement requirements.-

(a) Title, number and date of this specification
(b) Number of first article samples to be submitted. (See 4.3.)
(c) Where tests are to be performed (see 4.3).
(d) Levels of preservation, packaging, packing, required (see 5.).

6.1.2 Contract data requirements.- Data generated by this document is not deliverable unless specified on the Contract Data Requirements List (DD Form 1423).

The data required by this specification includes, but is not restricted to, the following:

(a) Contractor's quality assurance (4.1.1)
(b) Test procedures (4.1.3)
(c) First article inspection report (4.3.4)

6.2 First article.- Invitations for bids should provide that the Government reserves the right to waive the requirement for first article samples as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

6.3 Environmental testing.- Approval to ship may be withheld at the discretion of the Government, pending the decision from the Contracting Officer on the adequacy of corrective action (see 4.4.4).

Preparing activity:
Navy - EC

(Project 5820-N429)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.


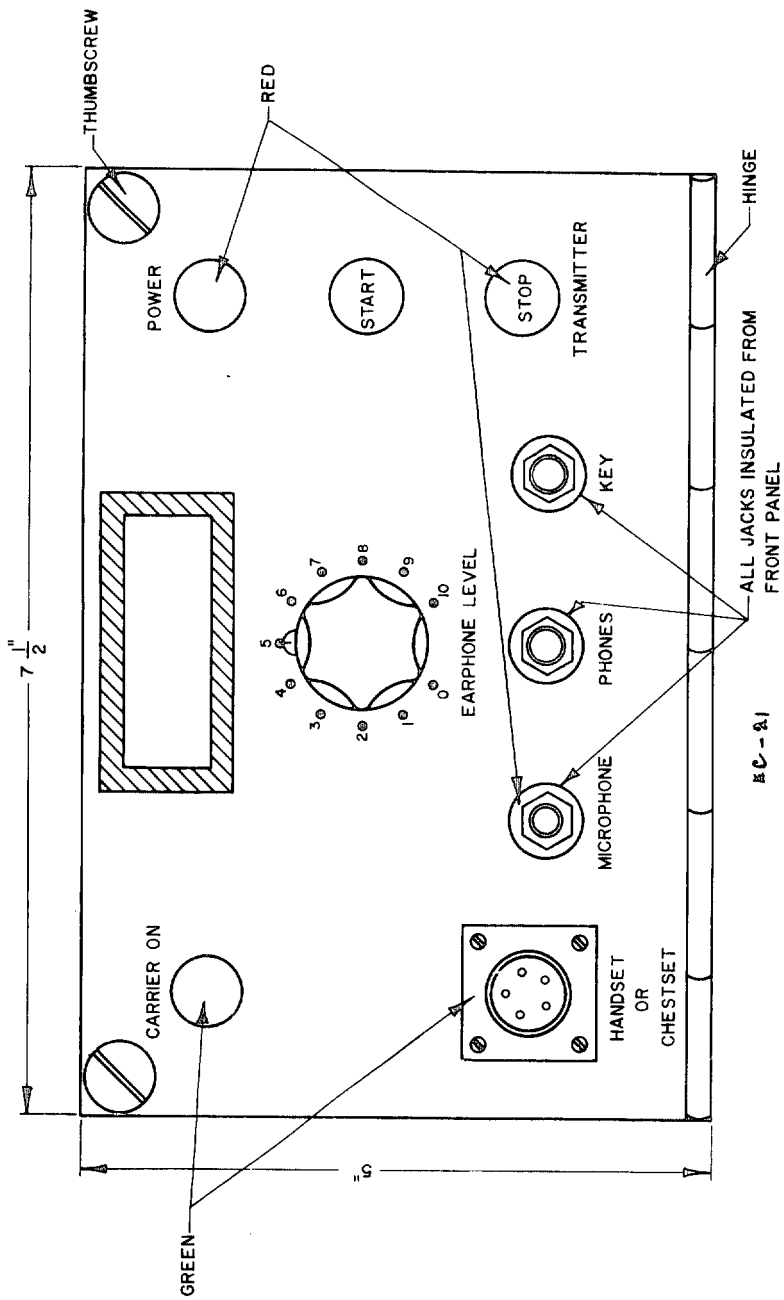


Figure 1 - Front panel layout C-1138( )/UR control

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

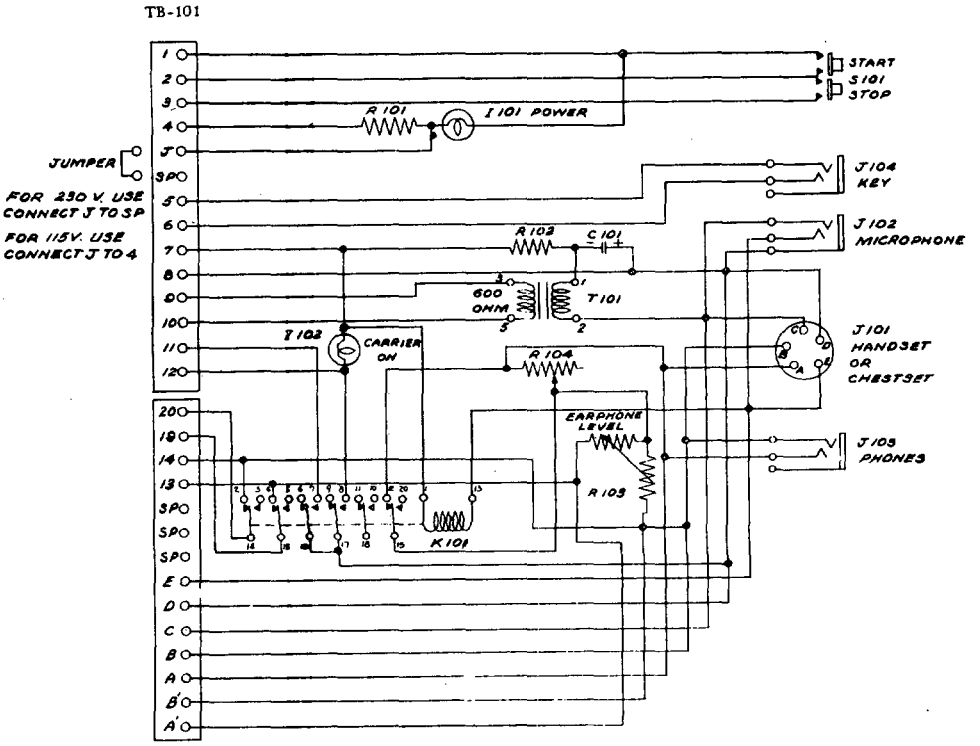

TB-102

TERMINAL		FUNCTION
Terminal Board TB-101	1	POWER BUS 115/230 V AC OR DC
	2	POWER ON CONTROL BUS
	3	POWER OFF CONTROL BUS
	Ø 4	POWER BUS 115/230 V AC OR DC ONE CONNECTION POINT FOR JUMPER PLATE FOR 115 V OPERATION
	J	COMMON CONNECTION POINT FOR JUMPER PLATE FOR 115 VOLT OR 230 VOLT OPERATION
	SP	SPARE CONTACT USED EXCLUSIVELY FOR JUMPER STOWAGE ON 230 V OPERATION
	5	KEY OUTPUT–RING
	6	KEY OUTPUT–TIP
	7	NEGATIVE 12 V INPUT
	8	POSITIVE 12 V INPUT
	9, 10	600 OHM LINE–MICROPHONE OUTPUT TO TRANSMITTER
	11	POSITIVE 12 V CARRIER ON SIGNAL OUTPUT
	12	POSITIVE 12 V CARRIER ON SIGNAL INPUT
	Ø	POWER IS APPLIED TO TERMINAL NO. 4 VIA A SET OF CONTACTS ON THE "STARTING" RELAY OF THE CONTROLLED TRANSMITTER. THE "POWER ON" INDICATOR WILL NOT LIGHT UNTIL THE STARTING RELAY HAS ACTUATED.
Terminal Board TB-102	13, 14	600 OHM LINE RECEIVER AUDIO INPUT TO CONTROL UNIT
	19, 20	RECEIVER AUDIO OUTPUT FOR SPEAKER AMPLIFIER
	A', B'	600 OHM LINE–RECEIVER AUDIO INPUT TO CONTROL UNIT, SAME AS 13 AND 14
	A, B	600 OHM HEADSET OUTPUT
	C	MICROPHONE INPUT, CARBON SINGLE BUTTON
	D	POSITIVE 12 V SUPPLY
	E	CARRIER ON RELAY CONTROL LEAD
	SPARES	THREE SETS OF SPARE TERMINALS

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-094/S-4042

Figure 2 - Control, Radio Set C-1138( )/UR, Schematic Diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:57Z
Check the source to verify that this is the current version before use.