MIL-C-22959(SHIPS)
23 October 1961
SUPERSEDING
(See 6.2)

MILITARY SPECIFICATION

CONTROL, RADIO SET C-1207( )/UR

1. SCOPE

1.1 This specification covers Control, Radio Set, C-1207( )/UR which is intended to provide a means for remote operating control of shipboard radio phone transmitting equipment from locations exposed to weather and sea spray aboard Naval ships. This control equipment shall be suitable for performing its primary functions when installed aboard any type or class of Naval ship.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-R-19 - Resistors, Variable, Wirewound, (Low operating Temperature), General Specification For.

MIL-R-26 - Resistors, Fixed, Wirewound, (Power Type).

MIL-T-27 - Transformers and Inductors, (Audio, Power, and Pulse).

MIL-C-62 - Capacitors, Fixed, Electrolytic (D. C. Aluminum Dry Electrolytic, Polarized.

MIL-R-94 - Resistors, Variable, Composition, General Specification for.

FSC 5820

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the current version before use.

MILITARY (cont'd)

MIL-C-915 - Cables, Cord and Wire, Electrical (Shipboard Use).
MIL-C-2194 - Cables, Power Electrical Reduced Diameter Types, Naval Shipboard.
MIL-L-3661 - Lamp holders and Lights, Indicator, Bayonet Base, Miniature and Candelabra.
MIL-C-5015 - Connectors, Electric "AN" Type.
MIL-R-5757 - Relays, Armature (For Electronic and Communications Equipment).
MIL-E-16400 - Electronic Equipment, Naval Ship and Shore; General Specification.
MIL-E-17555 - Electronic and Electrical Equipment and Associated Repair Parts, Preparation For Delivery of.
MIL-R-22732 - Reliability Requirements for Shipboard and Ground Electronic Equipment.

STANDARDS

MILITARY

MIL-STD-108 - Definitions of and Basic Requirements for Enclosures for Electric and Electronic Equipment.
MIL-STD-242 - Electronic Equipment Parts (Selected Standards).
MIL-STD-415 - Test Points and Test Facilities For Electronic Systems and Associated Equipment Design, Standard For.
MS3102 - Connector, Receptacle, Electric Box Mounting.
MS15567 - Lamps, Incandescent, S-6 Bayonet, Candelabra, Double Contact.
MS90286 - Lights, Indicator Style LH60, LH61 and LH63.

DRAWINGS

BUREAU OF SHIPS

RE-51F128 - Handset Type H169/U.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the current version before use.

2.2 Other publications. - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

OFFICIAL CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Official Classification Committee, 1 Park Ave, at 33rd St., N. Y. 16, N. Y.)

3. REQUIREMENTS

3.1 General requirements. - Each control equipment shall be suitable for its intended purpose in the Naval communications services, when installed aboard Naval ships and when exposed to the adverse conditions of open weather and contact with sea spray.

3.1.1 Material. - All material used in the equipment shall be in accordance with the requirements of Specification MIL-E-16400, except as otherwise specified herein. Particular attention shall be paid to the acceptable and unacceptable materials of Specification MIL-E-16400.

3.1.2 Reliability. - The equipment shall be designed and constructed to conform to Specification MIL-E-16400 for reliability. Additionally, a mathematical analysis of the reliability of the equipment and a calculation of the meantime between failure (MTBF) figure based upon this analysis, shall be made in accordance with Specification MIL-R-22732. The requirements of Specification MIL-R-22732 for quality control are applicable to all equipments furnished under this specification.

3.1.3 Selection of parts. - The selection and application of all component parts shall be in accordance with the requirements of Specification MIL-E-16400, unless otherwise specified herein. Standard MIL-STD-242 shall be the basic source for selection of parts.

3.1.4 Test points and features. - Test points shall be provided in accordance with the requirements of Standard MIL-STD-415.

3.1.5 Tropicalization. - Tropicalization of the complete control equipment or any part, thereof, will not be required.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the current version before use.

3.1.6 Blown fuse indicators. - Blown fuse indicators are not required.

3.1.7 Temperature. - The equipment shall meet the temperature requirements of class 2 of Specification MIL-E-16400

3.2 Control knobs. - Tactile identification form for the control knobs is not required. The control knob shall conform with Standard MIL-STD-242.

3.3 Locking devices. - A locking device shall be provided for speaker muting control R-104 (see figure 1). This device shall be positive in action; the adjustment of the muting control shall not be altered when secured by the locking device; and, the locking action shall not be abrogated when the equipment is subjected to shock or vibration.

3.4 Control circuit power. - Power for all relays, control circuits and indicating lamps will be obtained from external power sources of 115/230 volts, 60 cycles alternating current (a. c.) and 12 volts direct current (d. c.). The specified external power sources are expressed as nominal ratings.

3.5 Cabinet assembly. - The equipment shall be enclosed in a cabinet of aluminum construction and provided with a cover hinged at the bottom with provisions for easily securing it in both the open and the closed position without the use of tools. The method provided for securing the cover in the closed position shall consist of a single handle requiring not more than 180 degrees rotation to secure or release. The cover shall be of the same material as for the cabinet. The cabinet shall completely house the front operating panel, handset, and flexible handset cord.

3.5.1 Type of enclosure. - The cabinet assembly for the control equipment shall be watertight, when in the closed position and splashproof when in the open (operating) position, in accordance with the requirements of Standard MIL-STD-108.

3.5.2 Finish. - The finish of the cabinet assembly, its external and internal hardware, and its internal structural members shall conform to Specification MIL-E-16400.

3.5.3 Front operating panel. - The front operating panel shall be hinged along the bottom edge of the caninet assembly, and fastened at each corner by captivated, slotted head, thumb screws. The panel securing screws and the bosses which they engage shall be of such design and durability as to insure their satisfactory securing action when the control equipment is subjected to shock and vibration in accordance with Specification MIL-E-16400.

Source: https://assist.dla.mil -- Downloaded: 20261-19T14:58Z
Check the source to verify that this is the current version before use.

The hinge pin shall be removable and shall be fabricated from non-corrosive material or so protected against corrosion that its removal is not compromised by any corrosive action. The hinge pin may be supplied in other than a single continuous length for convenience of its removal (within) the confines of the cabinet assembly. The front operating panel shall rotate 90 degrees for the open position and shall be provided with mechanical stops, to support the weight of the panel and the parts, mounted thereon, when in the opened position. The front operating panel layout shall be subject to approval of the bureau or agency concerned prior to its fabrication.

3.5.4 Mounting. - The cabinet assembly shall be equipped with four lugs for bulkhead mounting. The mounting lugs shall be for mounting the equipment to a bulkhead when it will be subjected to inclination, shock and vibration as specified in Specification MIL-E-16400. Each mounting lug shall include a boss on its rear surface to provide approximately 1/8 inch clearance between the rear surface of the cabinet assembly and the bulkhead. The mounting holes in the mounting lugs shall each be 9/16 inch in diameter.

3.5.5 Cable entrances. - Provision shall be made for the entrance of interconnecting cables from the bottom of the cabinet assembly through a removable entry plate. The entry plate shall be capable of accommodating one type MSCA-14 cable, in accordance with Specification MIL-C-2194, two type TTHFWA-1-1/2 cables and one type TTHFWA-3 cable in accordance with Specification MIL-C-915.

3.5.6 Handset cord. - A 4-1/2 foot, flexible, 5 conductor cord shall be provided with an automatic coiling arrangement to prevent fouling of the handset cable with other controls when removing or replacing the handset from the handset holder.

3.5.7 Handset holder. - A holder shall be provided, in a recessed portion adjacent to the front operating panel, to hold the handset securely in place, when the handset is not in use and when the control equipment is subjected to inclination, shock, and vibration, as specified in Specification MIL-E-16400. It shall permit convenient removal of the handset for use without releasing mechanical holding devices such as latches, hooks, and so forth.

3.5.8 Internal wiring. - All internal wiring shall be insulated to withstand a peak potential of 1000 volts a.c. and shall be capable of a rated current carrying capacity of 3 amperes.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the current version before use.

3.5.9 Terminal boards. - The terminal boards, for connection of external cables, shall be secured to the inside rear of the cabinet assembly and shall be conviently accessible when the front panel is in its open position. The terminal boards shall conform with the requirements of Specification MIL-E-16400 and shall provide terminal markings as shown in figure 1. Terminals 1 through 12 and 15 through 18 (see figure 1) shall be of sufficient size to individually accommodate one conductor of a type MSCA cable (see 3.5.5). Terminals 13, 14, 19, 20, A', B', A, B, C, D and E (see figure 1) shall be of sufficient size to individually accommodate one conductor of type TTHFWA cables (see 3.5.5). The spare terminal dimensions shall be appropriate to the foregoing cable conductors.

3.6 Overall dimensions. - The maximum overall dimensions of the complete equipment, when its cabinet is in its closed position, shall not exceed the following:

Heighth	15-3/4 inches
Width	9-3/4 inches
Depth	8 inches

3.7 Weight. - The maximum weight of the control equipment complete with handset shall not exceed 20 pounds.

3.8 Inclination, shock and vibration. - The control equipment shall be capable of withstanding the requirements of Specification MIL-E-16400 for inclination, shock and vibration with the cabinet in both the open (operating) position and in the closed position.

3.9 Component parts requirements. - The component parts, required for the control equipment and specifically identified herein, shall be selected in accordance with the requirements of 3.1.3 whenever such selection affords electrical and mechanical interchangeability with the individual parts specified in 3.9.1.

3.9.1 All parts, except the terminal strips for external connections and handset holder and switch, shall be mounted on the interior front operating panel, either directly or to a chassis attached to the front operating panel. The arrangement and mounting of the parts shall afford accessibility for their individual inspection, maintenance and replacement, without damage to other parts, when the

Source: https://assist.dla.mil -- Downloaded: 20261019T14:58Z
Check the source to verify that this is the current version before use.

front operating panel is in its fully opened position. The control equipment shall include the following parts, wired and interconnected as shown on figure 1.

(a) C-101 - Capacitor, fixed plug-in electrolytic - 100 microfarads, 25 volts DCWV, in accordance with Specification MIL-C-62.

(b) HS-101 - Handset, type H169/U, in accordance, with Drawing RE51F128.

(c) I-101 - Indicator lamp assembly with red jewel conforming to type LH63 in accordance with Standard MS90286. The indicator lamp shall be a 120 volt, 6 watt (nominal ratings) incandescent, candelabra double contact base, type S-6, with clear bulb, in accordance with Standard MS15567.

(d) I-102 - Indicator lamp assembly with green jewel conforming to Specification MIL-L-3661. The indicator lamp shall be a commercial type 1813, 12-18 volt, or 0.100 ampere (nominal ratings) incandescent with miniature bayonet base and type T-3-1/4 clear bulb.

(e) J-101 - Connector, receptacle, female 5 contact, in accordance with Standard MS3102-14S-5S, or equivalent, as specified in Specification MIL-C-5015..

(f) J-102 - Same as J-101 above.

(g) K-101 - Relay, 4-pole, double throw, 12 volts direct current(d.c.), 75 milliamperes maximum, capable of normal operation between 8.5 and 15 volts, d.c. in accordance with Specification MIL-R-5757. Contacts shall be capable of carrying 1/2 ampere at 25 volts, d.c.,

(h) K-102 - Relay SPDT, 12 volts, d.c.. Leach Corp. No. P3-149 or equivalent.

(i) R-101 - Resistor, fixed wire wound, of resistance value and power dissipation ratings necessary to reduce voltage to J-101 to the proper value, in accordance with Specification MIL-R-26.

(j) R-102 - Resistor, fixed, wire wound, 160-ohms ± 5 percent, 2 watts, in accordance with Specification MIL-R-26.

(k) R-103 - Resistor, variable, dual potentiometer, constant impedance of 600 ohms; 1 watt, approximately 40 decibels (db) attenuation range (nominal values), in accordance with Specification MIL-R-94.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T14:58Z
Check the source to verify that this is the current version before use.

(l) R-104 - Resistors, variable 25,000-ohms, 2 volts screw-driver adjustable with lock nut provided, in accordance with Specification MIL-R-19.

(m) S-101 - Switch, normally open, two button momentary contact capable of carrying 1 ampere at 350 volts, 60 cycles a. c., with provision to prevent both operations simultaneously.

(n) S-102 - Handset holder switch, 5 pole, single throw, open when handset is in place; contacts rated at 1/2 ampere at 25 volts, d. c.

(o) T-101 - Transformer, audiofrequency (a. f.); line type, primary impedance 25-ohms; secondary load 600-ohms. Navy type 304561, in accordance with Specification MIL-T-27.

3.9.2 Front panel outlets. - Two connectors, receptacle, female, 5 contact, in accordance with Standard MS 3102-14S-5S, or equivalent, as specified in Specification MIL-C-5015 (see J-101 and J-102, figure 1) shall be provided on the front operating panel to permit use of a handset or chestset. The title "HANDSET or CHESTSET" shall appear on the front operating panel, beneath the receptacles. The outlets shall be provided with watertight screw-on-caps or fittings attached to the front operating panel by small chains or flexible links to prevent loss of the caps or fittings.

3.9.3 Relays. - The relays (K101 and K102, see figure 1) shall be of such design as to provide reliable operation when the control equipment is subjected to shock or vibration when the relays are connected to an external power source of 12 volts (nominal rating). The relays shall be capable of providing the foregoing reliability of operation when the external power source falls as low as 8. 5 volts d. c. Reliability of operation shall be predicated upon normal relay functioning, without sticking or chattering under the foregoing conditions. Additionally, the relays shall be capable of continuous operation, without abrogation of its reliability and without damage to its coil from over heating, when the external supply voltage is 15 volts, d. c. (nominal rating).

3.10 Controls. - Controls shall be considered in two groups; one group designated as operating and one group designated as semi-operating.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the current version before use.

3.10.1 Operating controls. - The following controls shall be mounted on the front operating panel:

(a) Transmitter "START-STOP" switch.
(b) "EARPHONE LEVEL" control.
(c) HANDSET.

3.10.1.1 Transmitter control. - The transmitter "START-STOP" switch shall be wired as shown on figure 1. It shall function to apply power to or from an externally connected radio transmitter. The title "TRANSMITTER" shall appear on the front operating panel below switch S-101 (see figure 1). The top push button shall be black with the title "START" engraved on its face. The lower push button shall be red with the sub-title "STOP" engraved on its face.

3.10.1.2 Power indicator. - Indicator lamp (see I-101, figure 1) shall be mounted above switch S-101 (see figure 1) to indicate when power is applied to the externally connected transmitter. The title "POWER" shall appear on the front operating panel and above the indicator lamp bezel.

3.10.1.3 "Carrier-on" indicator. - Indicator lamp (see I-102, figure 1) shall be mounted on the front panel to indicate the "Carrier-on" condition of the externally connected radio transmitter. The title "CARRIER-ON" shall be arranged above the indicator lamp bezel.

3.10.1.4 Earphone level control. - An attenuator (see R-103, figure 1) shall be provided on the front operating panel to control the earphone level from the externally connected receiver. The title "EARPHONE LEVEL" shall be arranged under the control knob. The numerals "0 through 10" shall appear on the front panel, equally spaced throughout the rotation of the earphone level control shaft, with "0" in the extreme clockwise position. Maximum attenuation afforded by the control shall occur with full clockwise rotation of its shaft.

3.10.1.5 Handset. - A handset (see H-101, figure 1) type H-169/U in accordance with Drawing RE-51F128 shall be provided on a holder in a recessed area adjacent to the front operating panel. It shall be easily accessible when the cabinet is in the open (operating) condition, and shall operate the handset holder switch (see S-102, figure 1) when the handset is removed from or replaced in the handset holder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:58Z
Check the source to verify that this is the current version before use.

3.10.1.6 Handset switch.- A 5 pole, single throw handset switch (see S-102, figure 1) rated 1/2 ampere at 25 volts d.c. shall be provided in the recessed area, adjacent to the front operating panel, and mounted in such a manner that the contacts will be open while the handset is in the handset holder. The switch shall close, completing the current to the handset (see figure 1), when the handset is removed from the holder.

3.10.1.7 Front panel card holder.- A card holder shall be provided on the front panel to accommodate a card (1 by 2-1/2 inches). The holder shall permit easy removal of the card without the use of tools. The card shall be white and of material of sufficient surface durability as to be suitable to receive repeated applications and erasures of ball penciled notations.

3.10.2 Semi-operating controls.- A speaker muting control (see R-104, figure 1) shall be mounted behind the front operating panel and easily accessible when the front operating panel is in its opened position. It shall afford adjustment of the a.f. level from an externally connected radio receiver to an externally connected speaker amplifier, during the "Carrier-on" condition of the externally connected radio transmitter in use. The title "SPEAKER MUTING CONTROL" shall be arranged adjacent to this control.

3.11 Workmanship.- Workmanship shall be as specified in Specification MIL-E-16400.

4. QUALITY ASSURANCE PROVISIONS

4.1 The supplier is responsible for the performance of all inspection requirements, as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 General sampling, inspection and tests.- Sampling, inspection and tests shall be in accordance with Specification MIL-E-16400, except as modified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the currentversion before use.

4.3 Preproduction inspection.- Preproduction inspection shall be conducted at the contractor's plant or at a laboratory acceptable to the bureau or agency concerned. The number of units of the control equipment to be subjected to preproduction tests and inspection shall be as specified in the contract or order. Preproduction inspections shall be conducted as specified in Specification MIL-E-16400 except that the following tests shall be omitted:

Tests
Supply line voltage and frequency
Water cooling
Power
Radio interference and undesired radiation
Equipment frequency spectrum signature

4.3.1 The operating test shall consist of continuity, resistance and insulation tests followed by operating with simulated load conditions to check proper operation of all relays, indicators and controls while using the specified handset.

4.3.2 The heat test shall be conducted with a simulated load of 1 ampere flowing through "START-STOP" switch (see S-101, figure 2), 75 milliamperes flowing through R-102 (see figure 1) and the primary of T-101 and relay K-101 (see figure 1) energized with 15 volts d.c.

4.4 Acceptance inspection.-

4.4.1 Production inspection shall be made on every equipment offered for delivery. The production inspection tests shall be as specified in Specification MIL E-16400.

4.4.1.1 The operating test, specified in Specification MIL-E-16400, shall consist of continuity, resistance and insulation tests followed by operating with simulated load conditions to check for proper operation of all relays, indicators and controls while using the specified handset.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:58Z
Check the source to verify that this is the current version before use.

4.4.2 Production control inspection. - Production control inspection shall be conducted as specified in Specification MIL-E-16400 and shall consist of the following tests:

Tests

Weights and dimensions
Heat
Enclosure
Controls and control circuits

4.4.2.1 The heat test shall be conducted under the same conditions as specified in 4.3.2 herein.

4.4.2.2 Sampling for production control inspection. - Samples for production control tests shall be selected from those equipments which have passed the production tests. These samples shall be selected at random in accordance with table I and shall be subjected to the tests specified in 4.4.2 to determine compliance with this specification. Failure to conform shall be counted a defect and the equipment shall be rejected.

Table I - Sampling for production control tests.

Number of control equipments in inspection lot	Number of control equipments in samples	Number of equipments non-conforming on any tests	
		Acceptance number	Rejection number
15 and under	4	0	1
16 - 25	5	0	1
26 - 40	6	0	1
41 - 65	8	0	1
66 to 110	10	1	2

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the currentversion before use.

5. PREPARATION FOR DELIVERY

5.1 Domestic shipment and early equipment installation and for storage of shipboard repair parts. -

5.1.1 Basic equipment. -

5.1.1.1 Preservation and packaging. - Preservation and packaging of basic equipment shall be sufficient to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the first receiving activity for early installation.

5.1.1.2 Packing. - Packing shall be accomplished in a manner which will insure acceptance by common carrier and will afford protection against physical and mechanical damage during shipment from the supply source to the first receiving activity for early installation. The shipping containers or method of packing shall conform to the Uniform Freight Classification Rules and Regulations or other carrier regulations as applicable to the mode of transportation.

5.1.1.3 Marking. - Shipment marking information shall be provided on interior packages and exterior shipping containers in accordance with the contractor's commercial practice. The information shall include nomenclature, federal stock number or manufacturer's part number, contract or order number, contractor's name and destination.

5.1.2 Shipboard repair parts. - Shipboard repair parts shall be preserved and packaged level A; packed level C and marked level A and C, respectively, in accordance with Specification MIL-E-17555.

5.2 Domestic shipment and storage or overseas shipment. - The requirements and levels of preservation, packaging, packing and marking for shipment shall be specified by the procuring activity (see 6.1).

(5.2.1 The following provides various levels of protection during domestic shipment and storage or overseas shipment, which may be required when procurement is made (see 6.1).

(5.2.1.1 Preservation, packaging, packing and marking. - Equipment and repair parts shall be preserved and packaged by level A or C as specified (see 6.1); packed by level A or B as specified (see 6.1) and marked in accordance with Specification MIL-E-17555.)

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Where tests are to be performed (see 4.3).
(c) Preservation, packaging, packing and marking requirements if other than those required by 5.1 (see 5.2).

6.2 This specification covers equipment formerly covered by Specification MIL-C-17308.

Notice.- When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented inventions that may be in any way related thereto.

Preparing activity:
Navy - Ships
(Project 5820-N225Sh)

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the current version before use.

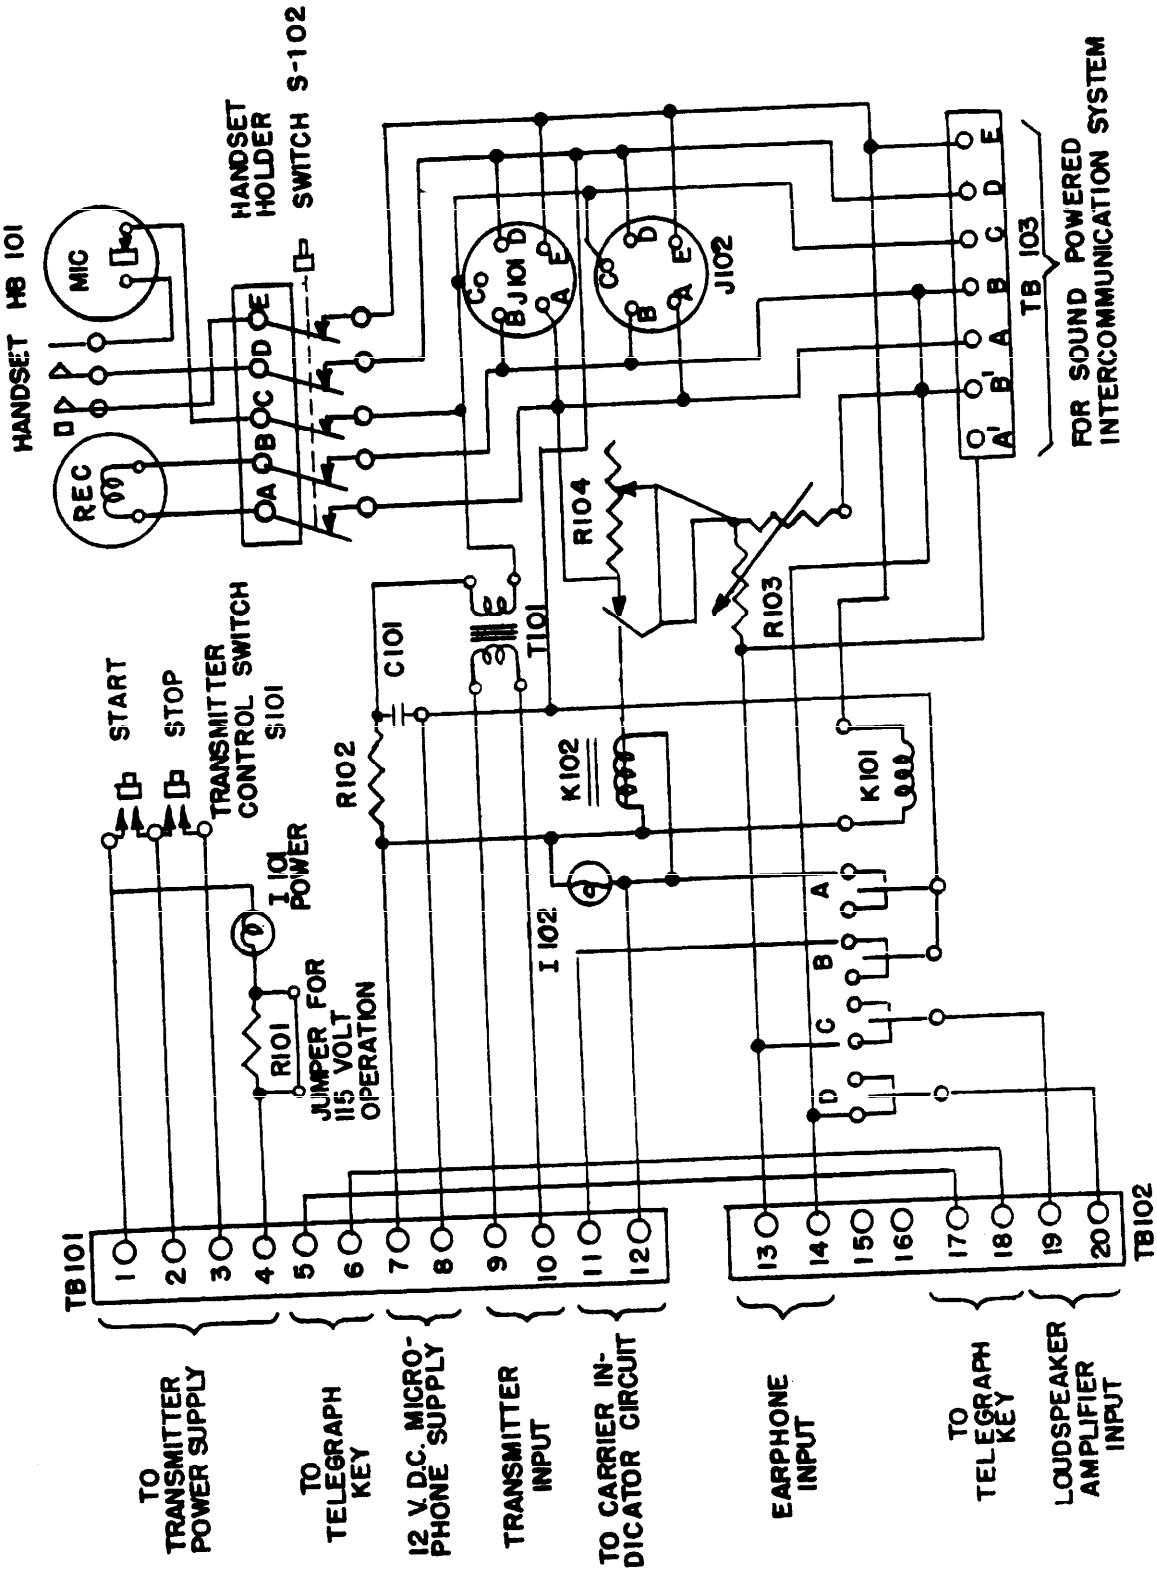


Figure 1 - Control, Radio Set C-1207( )UR Schematic Diagram.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Instructions

This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost.

Comments and the return of this form will be appreciated.

Fold on dotted lines on reverse side, staple in corner, and send to Bureau of Ships, Specifications and Standardization Branch, Washington 25, D. C.

Specification

Organization	City	State

Contract No.

Quantity of Items Procured	Dollar Amount $

Material procured under a direct Government contract ☐ or a subcontract ☐

1. Has any part of the specification created problems or required interpretation in procurement?
   a. Give paragraph number and wording.

   b. Recommendations for correcting the deficiencies.

2. Comment on any specification requirement considered too rigid.

3. Is the specification restrictive? ☐ Yes ☐ No If the answer is "Yes", in what way?

4. Remarks (Attach any pertinent data which may be of use in improving this specification.)
Place this form and papers in an envelope and send to the Bureau.

Submitted by (Print name and activity)	Date

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:58Z
Check the source to verify that this is the current version before use.

Fold

DEPARTMENT OF THE NAVY
BUREAU OF SHIPS
WASHINGTON 25, D. C.

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
NAVY DEPARTMENT

CHIEF, BUREAU OF SHIPS
SPECIFICATIONS AND STANDARDIZATION BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON 25, D. C.

Fold

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:58Z
Check the source to verify that this is the current version before use.