MIL-G-45654

AMENDMENT 2
15 MARCH 1963

SUPERSEDING
AMENDMENT 1
18 SEPTEMBER 1961

MILITARY SPECIFICATION

GAGES, PLUG AND RING, THREAD

This amendment forms a part of Military Specification MIL-G-45654, dated 30 December 1959, and has been approved by the Department of Defense for use by the Departments of the Army, the Navy, and the Air Force.

Page 2, paragraph 2.2, Under U.S. DEPARTMENT OF COMMERCE delete "Supplement to Commercial Standard CS8."

Page 3, paragraph 3.1.1.1, and page 5, paragraph 3.2.1 Delete "and the Supplement to Commercial Standard CS8."

Page 3, paragraph 3.1.2.2, change to read as follows:

3.1.2.2, Chip Groove. Go thread plug gaging members, except in nominal thread sizes up to and including No. 8 (0.164), shall be provided with a chip groove(s). Chip grooves are acceptable that are in accordance with general commercial practice, such as a groove cut at an angle with the axis or a longitudinal groove cut parallel with the axis and extending the complete length of the gaging member. The groove shall be located circumferentially at the start of the full thread, and in all cases the depth shall extend below the root of the first full thread space. One chip groove is required at the front end of the gaging member, unless the gaging member is reversible which requires one chip groove at each end. The preferred widths for chip grooves are as follows:

Nominal Diameter	Chip groove width (A)	
	Max	Min
in.	*in.*	*in.*
Up to and incl No. 8 (0,164)	No chip groove	
Above No. 8 (0.164) to and incl No. 12 (0.216)	0.036	0.026
Above No. 12 (0.216) to and incl 3/8 (0.375)	.052	.042
Above 3/8 (0.375) to and incl 1/2 (0.500)	.067	.057
Above 1/2 (0.500) to and incl 1 (1.000)	.083	.073
Above 1 (1.000) to and incl 1 3/4 (1.750)	.130	.120
Above 1 3/4 (1.750)	.193	.183

FSC 5220

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:39Z
Check the source to verify that this is the current version before use.

Page 3, paragraph 3.1.2.3, On page 4, 7th line, add after ". . . root of the thread." "The convolution rise due to the radius of the convoluting tool shall be no greater than H/2 measured from the major diameter of the Go thread plug gage as shown in figure 1. The beginning of the first full thread shall be sharp and of full form and contain no indentations or nicks.

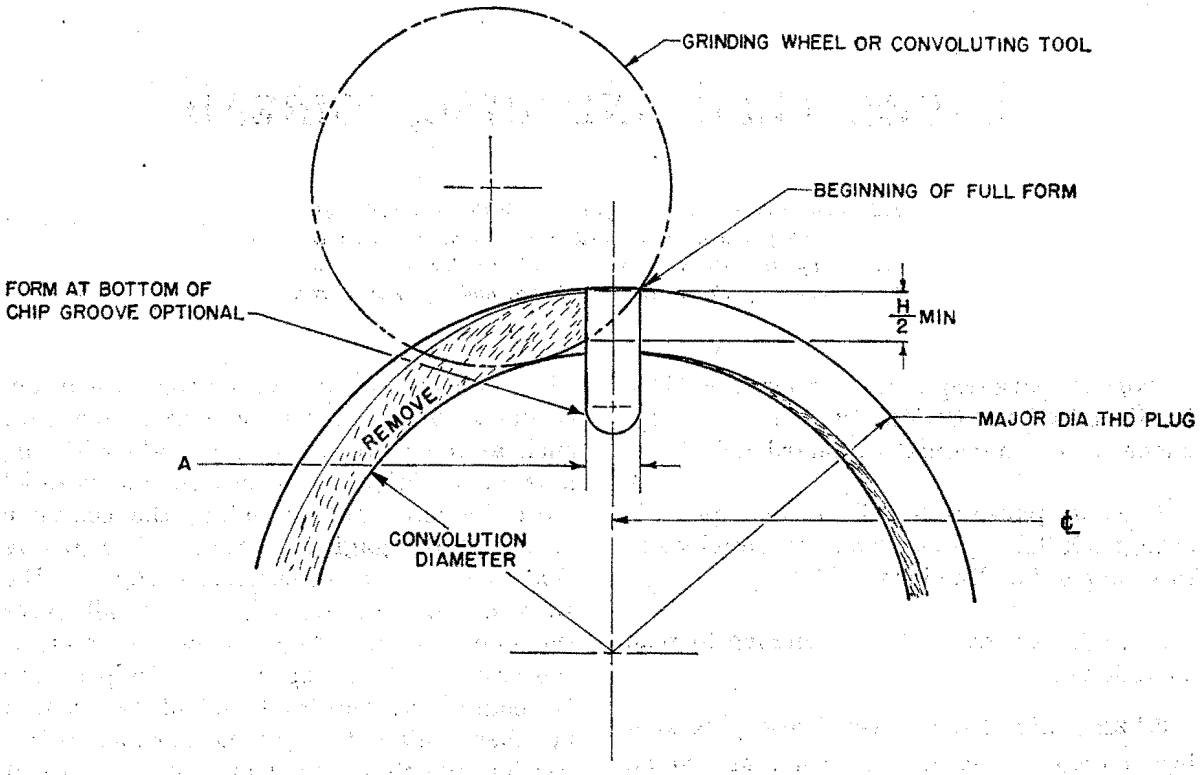


FIGURE 1. *Removal of partial thread and chip groove.*

Page 5, paragraph 3.2.4, Change to read as follows: "Trilock design gage handles shall be provided with either steel or aluminum alloy screws."

Page 5, paragraph 3.2.4.1, Delete the word "steel."

Page 6, paragraph 4.6.1, Insert the word "plug" in the first sentence between the words "thread" and "gaging."

Custodians:

Army—MU

Navy—WEPS

Air Force—MAA

Preparing Activity

Army—MU

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:39Z
Check the source to verify that this is the current version before use.