MILITARY SPECIFICATION

GAGES, PLUG AND RING, THREAD

This amendment forms a part of Military Specification MIL-G-45654, dated 30 December 1959, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

* Under STANDARDS: Delete "MIL-STD-10 - Surface Roughness Waviness and Lay."

* 2.2, lines 5-6: Delete "U.S. DEPARTMENT OF COMMERCE Commercial Standard CS8, Gage Blanks" and substitute "AMERICAN NATIONAL STANDARD INSTITUTE (ANSI) ANSI B47.1-1981, Gage Blanks"

2.2, lines 7-8: Delete "Supplement to Commercial Standard CS8."

* 2.2, lines 7-8: Add "ANSI B46.1-1978 Surface Texture (Surface Roughness, Waviness and Lay.)"

* 2.2, lines 9-11: Delete "(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C.)" and substitute "(Application for copies should be addressed to the American National Standard Institute, 1430 Broadway, New York, N.Y. 10018)"

* 2.2, line 12: Delete "Consolidated" and substitute "Uniform."

* 2.2, lines 15-17: Delete "Consolidated Classification Committee, 202 Chicago Union Station, Chicago 6, Ill." and substitute "Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606"

* 2.2, lines 23-24: Delete "1424 Sixteenth Street, N.W. Washington 6, D.C." and substitute "1616 P Street N.W., Washington, DC 20036"

PAGE 3

* 3.1.1.1, line 3: Delete "Commercial Standard CS8" and substitute "ANSI B47.1"

3.1.1.1, lines 3-4: Delete "and the Supplement to Commercial Standard CS8."

FSC 5220

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:39Z
Check the source to verify that this is the current version before use.

* 3.1.1.1.2.1, lines 4-5: Delete "Standard MIL-STD-10" and substitute "ANSI B46.1."

3.1.2.2: Delete in its entirety and substitute:

3.1.2.2 Chip Groove. Go thread plug gaging members, except in nominal thread sizes up to and including No. 8 (0.164), shall be provided with a chip groove(s). Chip grooves are acceptable that are in accordance with general commercial practice, such as a groove cut at an angle with the axis or a longitudinal groove cut parallel with the axis and extending the complete length of the gaging member. The groove shall be located circumferentially at the start of the full thread, and in all cases the depth shall extend below the root of the first full thread space. One chip groove is required at the front end of the gaging member, unless the gaging member is reversible which requires one chip groove at each end. The preferred widths for chip grooves are as follows:

Nominal Diameter	Chip groove width (A)	
	Max	Min
in.	in.	in.
Up to and incl No. 8 (0.164	No chip groove	
Above No. 8 (0.164) to and incl No. 12 (0.216)	0.036	0.026
Above No. 12 (0.216) to and incl 3/8 (0.375)	.052	.042
Above 3/8 (0.375) to and incl 1/2 (0.500)	.067	.057
Above 1/2 (0.500) to and incl 1 (1.000)	.083	.073
Above 1 (1.000) to and incl 1 3/4 (1.750)	.130	.120
Above 1 3/4 (1.750)	.193	.183

3.1.2.3, On page 4, line 7: Add after "...the root of the thread." "The convolution rise due to the radius of the convoluting tool shall be no greater than H/2 measured from the major diameter of the Go thread plug gage as shown in Figure 1. The beginning of the first full thread shall be sharp and of full form and contain no indentations or nicks.

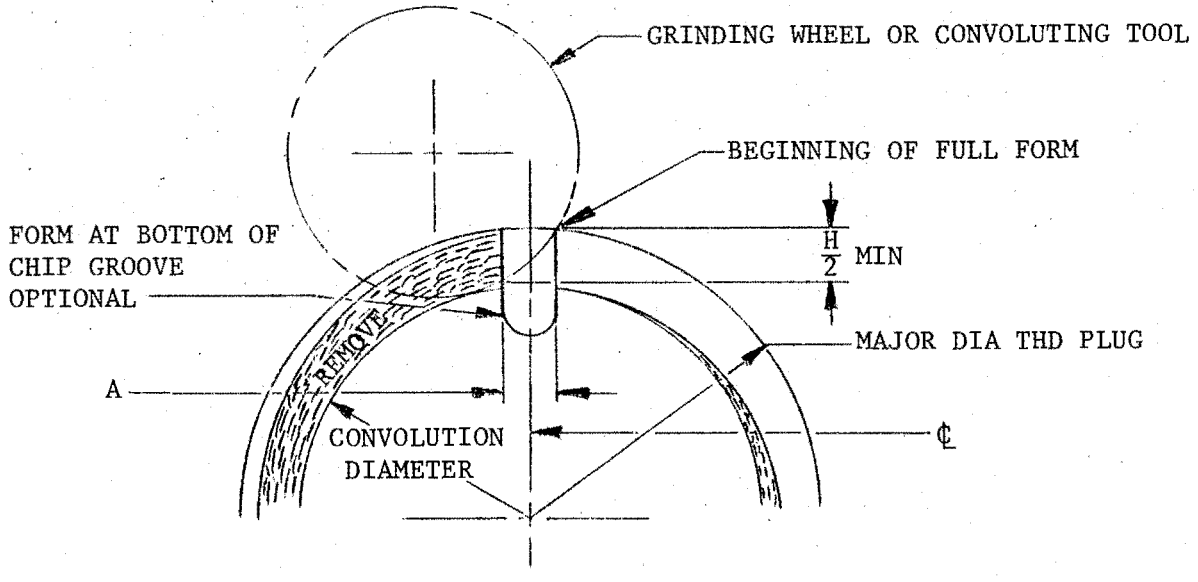


FIGURE 1. Removal of partial thread and chip groove.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:39Z
Check the source to verify that this is the current version before use.

PAGE 5

* 3.2.1, line 3: Delete "Commercial Standard CS8" and substitute "ANSI-B47.1"

3.2.1, lines 3-4: Delete "and the Supplement to Commercial Standard CS8."

3.2.4, lines 2-4: Delete "steel screws of type No. 2 as illustrated in the 1955 Supplement to Commercial Standard CS8" and substitute "either steel or aluminum alloy screws."

3.2.4.1, line 1: Delete the word "steel."

* 3.2.5.1, lines 2-3: Delete "as shown in Commercial Standard CS8."

PAGE 6

4.6.1, line 1: Insert the word "plug" between the words "thread" and "gaging."

NOTE: The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army - AR

Preparing activity:
Army - AR

(Project 5220-A202)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:39Z
Check the source to verify that this is the current version before use.