
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all subsidiary standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

AN101501 THRU AN101600

FED. SUP CLASS. 5306

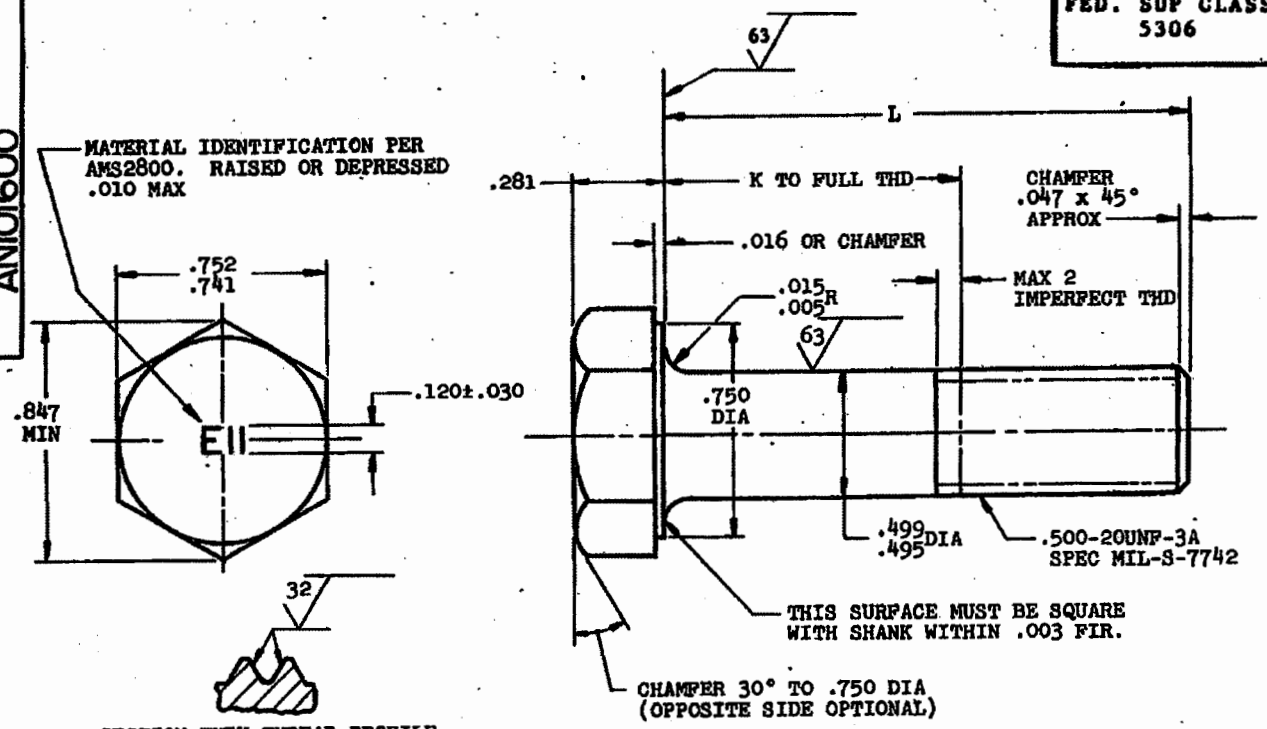

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.625	.750	AN101517	3.250	2.375	AN101531	5.000	4.125	AN101545
			1.688	.812	AN101518	3.375	2.500	AN101532	5.125	4.250	AN101546
			1.750	.875	AN101519	3.500	2.625	AN101533	5.250	4.375	AN101547
.938	(a)	AN101506	1.875	1.000	AN101520	3.625	2.750	AN101534	5.375	4.500	AN101548
1.000	.125	AN101507	2.000	1.125	AN101521	3.750	2.875	AN101535	5.500	4.625	AN101549
1.062	.188	AN101508	2.125	1.250	AN101522	3.875	3.000	AN101536	5.625	4.750	AN101550
1.125	.250	AN101509	2.250	1.375	AN101523	4.000	3.125	AN101537	5.750	4.875	AN101551
1.188	.312	AN101510	2.375	1.500	AN101524	4.125	3.250	AN101538	5.875	5.000	AN101552
1.250	.375	AN101511	2.500	1.625	AN101525	4.250	3.375	AN101539	6.000	5.125	AN101553
1.312	.438	AN101512	2.625	1.750	AN101526	4.375	3.500	AN101540			
1.375	.500	AN101513	2.750	1.875	AN101527	4.500	3.625	AN101541			
1.438	.562	AN101514	2.875	2.000	AN101528	4.625	3.750	AN101542			
1.500	.625	AN101515	3.000	2.125	AN101529	4.750	3.875	AN101543			
1.562	.688	AN101516	3.125	2.250	AN101530	4.875	4.000	AN101544			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR.

MATERIAL: STEEL AMS6322

HARDNESS: ROCKWELL C26-32

FINISH: CADMIUM PLATE AMS2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS7452

(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969 NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 3 June 49 REVISED (1) 31 Aug 54 (2) 3 Mar 69 (3) 30 June 1986

P.A. AF-11 CUST. NAVY-AS ARMY-AV	AIR FORCE-NAVY AERONAUTICAL STANDARD BOLT - HEX HEAD .500-20	AN101501 THRU AN101600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:24Z
Check the source to verify that this is the current version before use.