
AN102201 THRU AN102300

FED SUP. CLASS. 5306

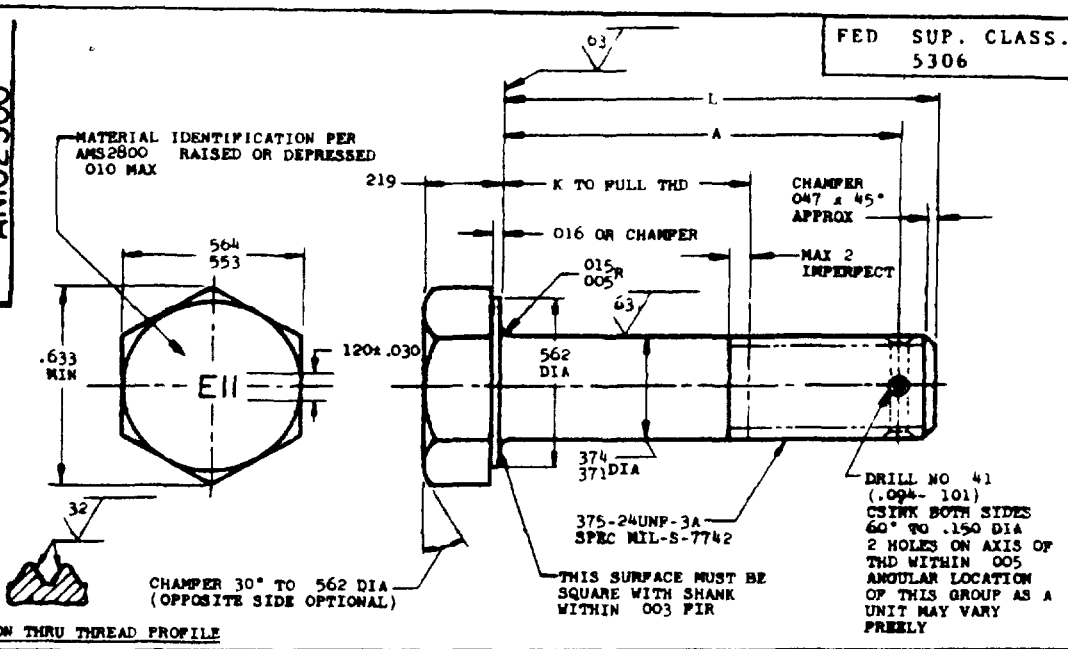

SECTION THRU THREAD PROFILE

L	A	K +.000 -.060	PART NO	L	A	K +.000 -.060	PART NO	L	A	K +.000 -.060	PART NO
				2 125	1 985	1 375	AN102225	4 750	4 610	4 000	AN102246
				2 250	2 110	1 500	AN102226	4 875	4 735	4 125	AN102247
750	610	(a)	AN102206	2 375	2 235	1.625	AN102227	5 000	4 860	4 250	AN102248
812	.672	(a)	AN102207	2 500	2 360	1 750	AN102228	5 125	4 985	4 375	AN102249
.875	.735	125	AN102208	2.625	2 485	1 875	AN102229	5 250	5 110	4 500	AN102250
938	798	188	AN102209	2 750	2 610	2 000	AN102230	5 375	5 235	4 625	AN102251
1 000	.860	.250	AN102210	2.875	2.735	2 125	AN102231	5 500	5 360	4 750	AN102252
1.062	.922	312	AN102211	3.000	2 860	2 250	AN102232	5 625	5 485	4 875	AN102253
1 125	985	375	AN102212	3 125	2 985	2 375	AN102233	5.750	5 610	5 000	AN102254
1.188	1 048	438	AN102213	3 250	3.110	2 500	AN102234	5.875	5 735	5 125	AN102255
1.250	1 110	500	AN102214	3 375	3.235	2 625	AN102235	6.000	5.860	5 250	AN102256
1.312	1.172	562	AN102215	3 500	3 360	2 750	AN102236				
1 375	1.235	625	AN102216	3.625	3 485	2 875	AN102237				
1.438	1 298	688	AN102217	3 750	3.610	3 000	AN102238				
1.500	1 360	750	AN102218	3 875	3 735	3 125	AN102239				
1 562	1 422	.812	AN102219	4.000	3.860	3.250	AN102240				
1.625	1 485	875	AN102220	4 125	3 985	3 375	AN102241				
1.688	1.548	.938	AN102221	4.250	4 110	3 500	AN102242				
1 750	1.610	1 000	AN102222	4 375	4 235	3.625	AN102243				
1.875	1 735	1.125	AN102223	4 500	4 360	3.750	AN102244				
2.000	1.860	1.250	AN102224	4.625	4 485	3 875	AN102245				

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .0025 FIR PER INCH OF BOLT LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .017 FIR

MATERIAL STEEL AMS6322
HARDNESS: ROCKWELL C26-32
FINISH: CADMIUM PLATE AMS2400
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION AMS7452
(3) INSPECTION ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640
BREAK SHARP EDGES .003- 015 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°
DO NOT USE UNASSIGNED PART NUMBERS

INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969 NO SUPERSEDING STANDARD

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 8 June 49 REVISED ① 11 Aug 54 ② 1 Mar 69 ③ 30 June 86

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

P.A. AF-11 CUST. NAVY-AS ARMY-AV	AIR FORCE-NAVY AERONAUTICAL STANDARD BOLT - HEX HEAD, DRILLED SHANK, 375-24	AN102201 THRU AN102300

Project No. 5306-1007

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:24Z
Check the source to verify that this is the current version before use.