
AN103301 THRU AN103400

FED. SUP. CLASS. 5306

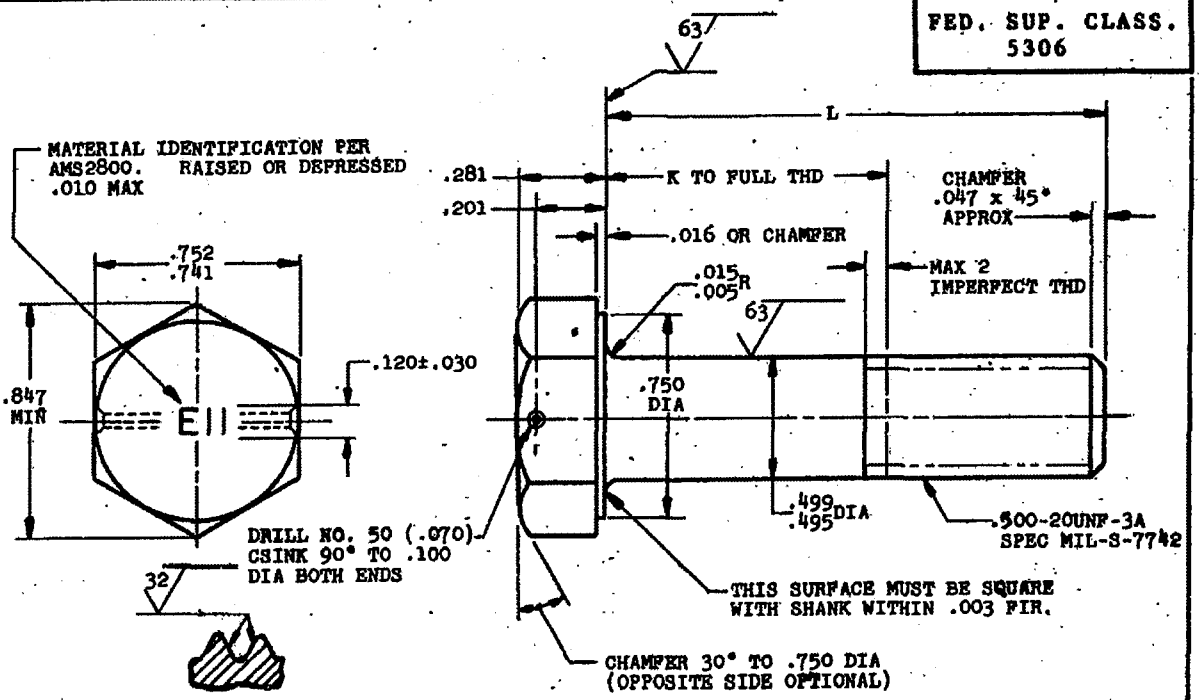

SECTION THRU THREAD PROFILE

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.812	.562	AN103319	3.125	1.875	AN103333	4.875	3.625	AN103347
1.000	(a)	AN103306	1.875	.625	AN103320	3.250	2.000	AN103334	5.000	3.750	AN103348
1.062	(a)	AN103307	1.938	.688	AN103321	3.375	2.125	AN103335	5.125	3.875	AN103349
1.125	(a)	AN103308	2.000	.750	AN103322	3.500	2.250	AN103336	5.250	4.000	AN103350
1.188	(a)	AN103309	2.062	.812	AN103323	3.625	2.375	AN103337	5.375	4.125	AN103351
1.250	(a)	AN103310	2.125	.875	AN103324	3.750	2.500	AN103338	5.500	4.250	AN103352
1.312	(a)	AN103311	2.188	.938	AN103325	3.875	2.625	AN103339	5.625	4.375	AN103353
1.375	(a)	AN103312	2.250	1.000	AN103326	4.000	2.750	AN103340	5.750	4.500	AN103354
1.438	.188	AN103313	2.375	1.125	AN103327	4.125	2.875	AN103341	5.875	4.625	AN103355
1.500	.250	AN103314	2.500	1.250	AN103328	4.250	3.000	AN103342	6.000	4.750	AN103356
1.562	.312	AN103315	2.625	1.375	AN103329	4.375	3.125	AN103343			
1.625	.375	AN103316	2.750	1.500	AN103330	4.500	3.250	AN103344			
1.688	.438	AN103317	2.875	1.625	AN103331	4.625	3.375	AN103345			
1.750	.500	AN103318	3.000	1.750	AN103332	4.750	3.500	AN103346			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (a) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR.

MATERIALS: STEEL AMS6322

HARDNESS: ROCKWELL C26 - 32

FINISH: CADMIUM PLATE AMS2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS7452

(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERENCES; LINEAR DIMENSIONS, ±.010, ANGULAR DIMENSIONS IN INCHES ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969 NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 8 June 49 REVISED (1) 31 Aug 54 (2) 3 Mar 69 (3) 30 June 86

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes AN, antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies on or after 6 months after the latest date of approval shown.

P.A. AF-11
CUST. NAVY-AS
ARMY-AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - DRILLED HEX HEAD, 1 HOLE, .500-20

AN103301 THRU AN103400

Project No. 5306-1018

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:24
Check the source to verify that this is the current version before use.