
AN103601 THRU AN103700

FED. SUP. CLASS. 5306

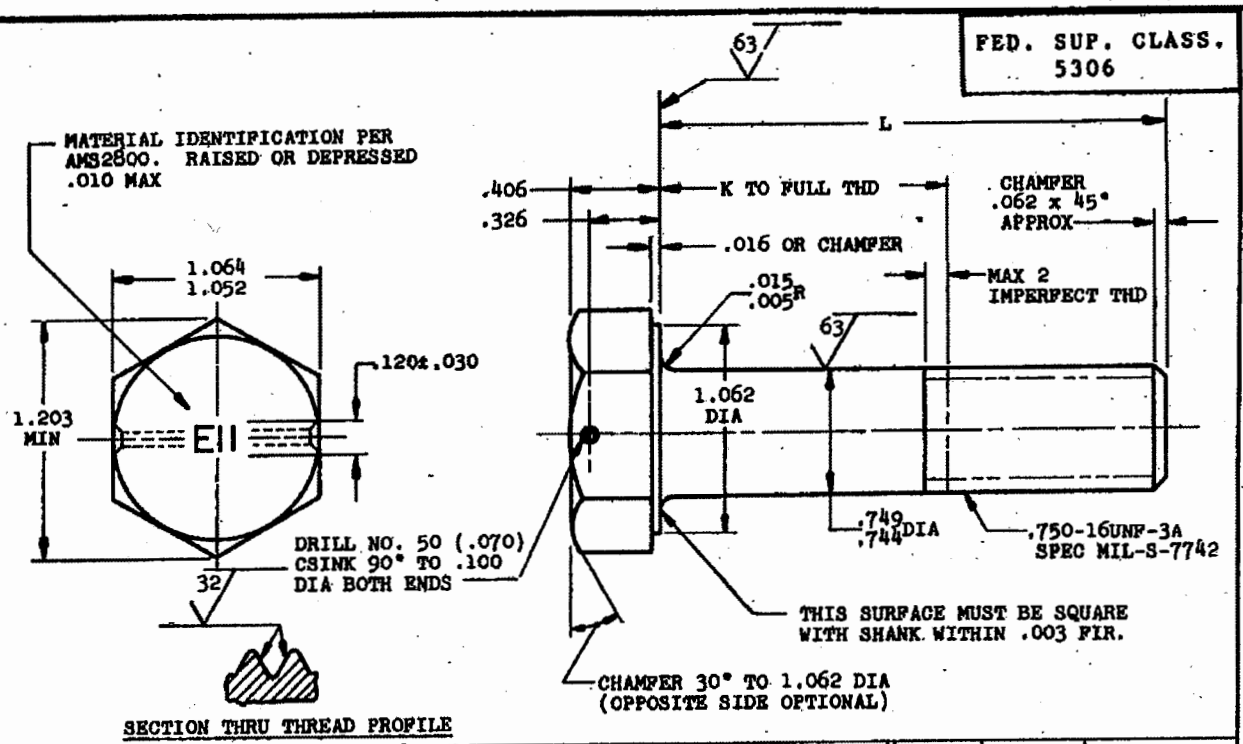

SECTION THRU THREAD PROFILE

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			2.188	.438	AN103617	3.375	1.625	AN103631	5.125	3.375	AN103645
			2.250	.500	AN103618	3.500	1.750	AN103632	5.250	3.500	AN103646
			2.312	.562	AN103619	3.625	1.875	AN103633	5.375	3.625	AN103647
1.500	(a)	AN103606	2.375	.625	AN103620	3.750	2.000	AN103634	5.500	3.750	AN103648
1.562	(a)	AN103607	2.438	.688	AN103621	3.875	2.125	AN103635	5.625	3.875	AN103649
1.625	(a)	AN103608	2.500	.750	AN103622	4.000	2.250	AN103636	5.750	4.000	AN103650
1.688	(a)	AN103609	2.562	.812	AN103623	4.125	2.375	AN103637	5.875	4.125	AN103651
1.750	(a)	AN103610	2.625	.875	AN103624	4.250	2.500	AN103638	6.000	4.250	AN103652
1.812	(a)	AN103611	2.688	.938	AN103625	4.375	2.625	AN103639			
1.875	(a)	AN103612	2.750	1.000	AN103626	4.500	2.750	AN103640			
1.938	(a)	AN103613	2.875	1.125	AN103627	4.625	2.875	AN103641			
2.000	.250	AN103614	3.000	1.250	AN103628	4.750	3.000	AN103642			
2.062	.312	AN103615	3.125	1.375	AN103629	4.875	3.125	AN103643			
2.125	.375	AN103616	3.250	1.500	AN103630	5.000	3.250	AN103644			

(a) THREAD TO HEAD, MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .032 FIR.

MATERIAL: STEEL AMS6322

HARDNESS: ROUGHNESS C26 ~ 32

FINISH: CADMIUM PLATE AMS2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS7452

(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERENCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969 NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 8 June 49 REVISED (1) 31 Aug 54 (2) 3 Mar 69 (3) 30 June 86

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

NOTICE: When Government drawings specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated furnished or in any way supplied the said drawings specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new designs not later than 6 months after the latest date of approval shown.

P.A. AF-11 CUST. NAVY-AS ARMY-AV	AIR FORCE-NAVY AERONAUTICAL STANDARD BOLT - DRILLED HEX HEAD, 1 HOLE, .750-16	AN103601 THRU AN103700

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:24Z
Check the source to verify that this is the current version before use.

Project No. 5306-1021