MIL-C-43108A(GL)

10 April 1967

SUPERSEDING
MIL-C-43108(QMC)
25 September 1962

MILITARY SPECIFICATION

CASE, CARRYING, HANDSAW, ONE MAN

1. SCOPE

1.1 This specification covers the requirements for one type and size of carrying case for a handsaw. The case is fabricated from water-resistant and mildew-resistant treated cotton duck.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester
FF-R-556	-	Rivets, Solid, Small, Rivets, Split, Small, Rivets, Tubular, Small and Caps, Rivets, General Purpose
KK-L-271	-	Leather, Cattlehide, Strap, Vegetable-Tanned
QQ-S-766	-	Steel Plate, Sheet, and Strip-Corrosion Resisting
UU-P-268	-	Paper, Kraft, Untreated, Wrapping
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths
DDD-L-20	-	Label, for Clothing, Equipage, and Tentage, (General Use)

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:43Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-W-530	-	Webbing and Tape, Textile, Cotton, General Purpose, Natural or in Colors
MIL-H-639	-	Hooks (for Belt, Straps, and Equipage Items)
MIL-R-2583	-	Rivets, Solid, Belt and Washers, Flat (Burrs)
MIL-F-10884	-	Fasteners, Snap
MIL-B-17757	-	Boxes, Fiber, Corrugated, (Modular Sizes)

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

DRAWINGS

ARMY NATICK LABORATORIES

2-2-215 - Case, Carrying, Handsaw, One Man; Assembly Complete

(Figure 1 is a miniature reproduction of Drawing 2-2-215 and is attached for information only).

(Copies of specifications, standards and drawing required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Preproduction sample.- Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished case covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:43Z
Check the source to verify that this is the current version before use.

3.2 Materials.-

3.2.1 Cloth, duck, cotton.- The cloth shall conform to type III, 9.85 ounces per square yard of CCC-C-419.

3.2.1.1 Color and treatment.- The cloth shall be olive drab shade No. 7 and shall conform to type I, class B of CCC-D-950.

3.2.2 Webbing, textile, cotton.- The webbing shall be dyed to match olive drab shade No. 7 and shall conform to type IIb, class 4, 2-1/4 inch width of MIL-W-530.

3.2.3 Tape, textile, cotton.- The tape shall be dyed to match olive drab shade No. 7 and shall conform to type I, class 4, 1-inch width of MIL-W-530.

3.2.4 Leather, cattlehide.- The leather shall be russet, in the thickness specified on the drawing and shall conform to class 1, any type, any selection of KK-L-271.

3.2.5 Thread, polyester.- The thread shall conform to type I, class 1, sub-class B, size FF, shade S-1 (Cable No. 66022) of V-T-285. The dyed thread shall show fastness to chlorine bleaching equal to or better than the standard shade sample (see 6.3). If no standard shade sample is available, the dyed thread shall show good fastness to chlorine bleaching.

3.2.6 Fasteners, snap.- The snap fasteners shall conform to style 2, finish 2 of MIL-F-10884. The female component shall be button 24 line size, size 1, and the male component shall be stud eyelet size 1.

3.2.7 Hook, double.- The double hooks shall conform to type I, class 1 of MIL-H-639.

3.2.8 Steel strip.- The corrosion resistant steel strips shall conform to 301 or 302, condition A, 1/2 hard temper, finish number 2, number 1 round edges of QQ-S-766, in the size and thickness specified on the drawing.

3.2.9 Rivets with washers.-

3.2.9.1 Rivets.- The rivets shall conform to type VI, grade F, 3/32-inch nominal diameter, 1/4 inch nominal length and black chemical finish of FF-R-556.

3.2.9.2 Washers.- The flat washers shall conform to Class A, size No. 13 of MIL-R-2583.

3.3 Construction.- The construction shall conform in all respects to Drawing No. 2-2-215 and as specified herein.

3.3.1 Stitching.-

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:43Z
Check the source to verify that this is the current version before use.

3.3.1.1 Type.- All stitching shall conform to type 301 of Fed. Std. No. 751, with six to eight stitches per inch.

3.3.1.2 Thread breaks.- Thread breaks in stitching shall be overstitched not less than 1 inch at each break.

3.3.1.3 Stitching ends.- Stitching at the ends shall be overstitched not less than 1 inch, except where ends are turned under in a hem, held down by other stitching, or where stitching is performed automatically. When stitch patterns such as box or box with cross-stitch are performed automatically, at least three or more tying, overlapping or backstitches shall be used to secure the ends of stitching.

3.3.1.4 The addition of any lubricant to the polyester thread prior to or during the sewing operation is prohibited.

3.3.2 Setting of snap fasteners.- If a hole is punched before inserting the male or femal part of the fastener, it shall be smaller than the outside diameter of the fastener tube so that the tube must be forced through the hole.

3.3.3 Setting of rivets.- The rivets shall be securely set and neatly headed.

3.4 Marking.- All marking shall conform to DDD-L-20.

3.4.1 Special marking.- The application of the letters "US" shall conform to type IV, class 9 in the size characters and in the location shown on the drawing. Fastness of the class 9 markings shall be as specified for class 5 markings.

3.4.2 Identification marking.- The identification markings shall conform to type IV, class 5 in the location shown on the drawing.

3.5 Workmanship.- Cloth components shall be clean and free of holes, cuts, tears or cloth defects such as multiple floats and broken or missing yarns. Webbing and tape shall contain no frayed or scalloped edges. Thread tension shall be maintained so that there will be no loose stitching and seam allowances shall be maintained with seams properly sewn so that no run-offs, twists, pleats, puckers or open seams shall result. Care shall be taken in sewing to insure that no needle chews occur. All thread ends shall be trimmed. Metal components shall be free of burrs, sharp edges, corroded areas and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:43Z
Check the source to verify that this is the current version before use.

laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection.- When a preproduction sample is required, it shall be examined for the defects listed in tables I and II.

4.3 Sampling for inspection.- Sampling for inspection shall be made in accordance with the provisions set forth in MIL-STD-105, unless otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 In-process inspection.- Inspection shall be made to determine that the following are as specified. Whenever nonconformance is noted, correction shall be made to the items affected and the process.

a. There shall be no lubrication of polyester thread prior to or during sewing operations for compliance with 3.3.1.4.

b. Holes punched to receive male or female parts of snap fasteners are in compliance with 3.3.2.

c. Rivets are securely set and neatly headed for compliance with 3.3.3.

4.3.3 End product inspection.- The lot shall consist of all completely fabricated carrying cases offered for inspection at one time. The sample unit shall be one completely fabricated case. The inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.3.3.3.

4.3.3.1 Visual examination.- Visual examination shall be made of the completely fabricated case for the defects in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:43Z
Check the source to verify that this is the currentversion before use.

TABLE I.- Classification of defects for visual characteristics

Examine	Defect	Classification Major	Minor A	Minor B
Fabric	Cut or tear longer than 1/8 inch; hole (including exposed drill hole) larger than 1/8 inch diameter	X		
	Exposed drill hole (1/8 inch or less); i.e., not covered by attached parts			X
	Broken or missing yarn; multiple floats		X	
Webbing and tape	Edge frayed or scalloped			X
Hardware	Broken	X		
	Malformed:			
	-fails to perform intended function	X		
	-but will perform intended function		X	
	Corroded area			X
	Burr or sharp edge which may cause injury in handling or damage to fabric	X		
Seams and stitching	Open seam:			
	- 1 inch or less			X
	- more than 1 inch		X	
	Run-offs (see open seams)			
NOTE:	A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or run-off stitches occur and are not overstitched. On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open.			
	Raw edges caught in stitching (where turnunder is required):			
	-more than 1/2 inch, but not more than 1 inch			X
	-more than 1 inch		X	
	Needle chews resulting in cut or tear larger than 1/8 inch in length, or hole larger than 1/8 inch diameter (see cut, tear or hole)			

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:43Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics (con't)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Seams badly pleated or puckered		X	
	Thread breaks: -overstitched less than 1 inch			X
Seam and stitch type	Wrong seam type	X		
	Wrong stitch type	X		
Stitch tension	Loose, resulting in an exposed bobbin or top thread for more than 6 inches		X	
	Tight, as evidenced by puckering of fabric on seams for more than 6 inches		X	
Stitches per inch	Less than minimum specified		X	
	One or more stitches in excess of maximum specified			X
	NOTE: Variation in the number of stitches per inch, caused by the operator's speeding up the machine and pulling the fabric in order to sew over heavy seams or heavy places or in turning corners shall be classified as follows: a. Within the minor "A" defect classification - minor B defect b. Within the minor "B" defect classification - no defect			
Stitching gage	Not as specified		X	
Stitching margin	Larger than specified by more than 3/16 inch: -less than 4 inches in length			X
	-4 inches or more in length		X	
Stitching ends	Overstitched less than 1 inch (except where ends are held down by other stitching, turned under in a hem or where stitching is performed automatically)			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:43Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and Stitching (cont'd)				
Stitching ends (cont'd)	Secured with less than three tying, overlapping or backstitches when automatic stitching is performed			X
Boxstitching	Incomplete: -one row of stitching omitted		X	
	-two or more rows of stitching omitted	X		
Components and assembly	Any component or required operation omitted (unless otherwise classified)	X		
	Any part or component not fabricated of applicable referenced material	X		
	Mends, darns or patches	X		
Hold-down strap	End attached to body not caught in hem stitching		X	
Hanger reinforcement	Upper half of boxstitching not stitched through hanger		X	
Double hook	Reversed; i.e., set with hook ends facing body	X		
Snap fastener	Not functioning properly, failing to effect a secure closure or to open freely	X		
	Set with outer rim of male part extending beyond folded edge of hem	X		
	Set with female portion off center of tape, overlapping stitched area		X	
	Not securely clinched or clinched excessively tight, cutting fabric or tape	X		
	Loosely clinched, causing male part to rotate around hole in fabric			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:43Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Components and assembly (cont'd)				
Rivets with washers	Any rivet set with washer inside of case		X	
	Insecurely clinched; i.e., washers become disengaged from rivets when moderate force is applied	X		
	Clinched excessively, cutting fabric	X		
	One omitted from any steel strip		X	
	Two or more omitted from any steel strip	X		
Markings;"US" and identification	Omitted, incorrect, illegible, misplaced, or size characters not as specified			X
Cleanness	Grease or oil stains; thread ends not trimmed throughout			X

4.3.3.2 Dimensional examination.- Dimensional examination shall be made of the completely fabricated case for the defects in table II.

TABLE II.- Classification of defects for dimensional characteristics

Examine	Defect	Classification Major	Minor A	Minor B
Overall dimensions	Smaller than specified dimensions, less applicable minus tolerance indicated on drawing	X		
	Larger than specified dimensions and applicable plus tolerance indicated on drawing			X
Location dimensions	Not within specified tolerances			X

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:43Z
Check the source to verify that this is the currentversion before use.

4.3.3.3 Inspection levels and AQL's.- The inspection levels and AQL's, expressed in terms of defects per hundred units, shall be as follows:

Examination	Inspection level	AQL	
For defects applicable to table I	II	6.5	Major
		15.0	Major and minor A defects combined
		25.0	Total major, minor A and B defects combined
For defects applicable to table II	S-3	2.5	Major
		10.0	Major and minor A defects combined
		25.0	Total major, minor A and B defects combined

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging and packing requirements are in compliance with section 5 of this specification. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2, with an AQL of 2.5, expressed in terms of defects per hundred units.

TABLE III.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing or damaged
Contents	Number per container not as required

5. PREPARATION FOR DELIVERY

5.1 Packing.- Packing shall be level A, B or C as specified (see 6.2).

5.1.1 Level A.- Twenty-four cases shall be packed one in length, four in width (alternately reversed end for end), and six in depth within a fiberboard shipping container, assembled, closed and reinforce in accordance with class weather-resistant, V3s, size 2 of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:43Z
Check the source to verify that this is the current version before use.

5.1.2 Level B.- Twenty-four cases shall be packed one in length, four in width (alternately reversed end for end) and six in depth within a fiberboard shipping container, assembled and closed in accordance with class domestic, size 2 of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.1.2.1 When specified, shipping containers shall be fabricated from V3c or V3s fiberboard (see 6.2).

5.1.3 Level C.- Cases shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.2 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The case covered by this specification is designed to serve as a suitable carrier for the Saw, Hand, Crosscut, 24 inch blade of MIL-S-43032.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification
b. Stock number
c. When preproduction sample is not required (see 3.1)
d. Selection of applicable levels of packing (see 5.1)
e. Whether V-board containers are required for level B shipments (see 5.1.2.1)

6.3 For access to standard shade sample of thread, address the procuring office issuing the invitation for bids.

Custodian:

Army - GL

Review activity:

Army - MD

User activity

Army - ME


Preparing activity:

Army - GL

Project No. 5110-A063

Review and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:43Z
Check the source to verify that this is the current version before use.

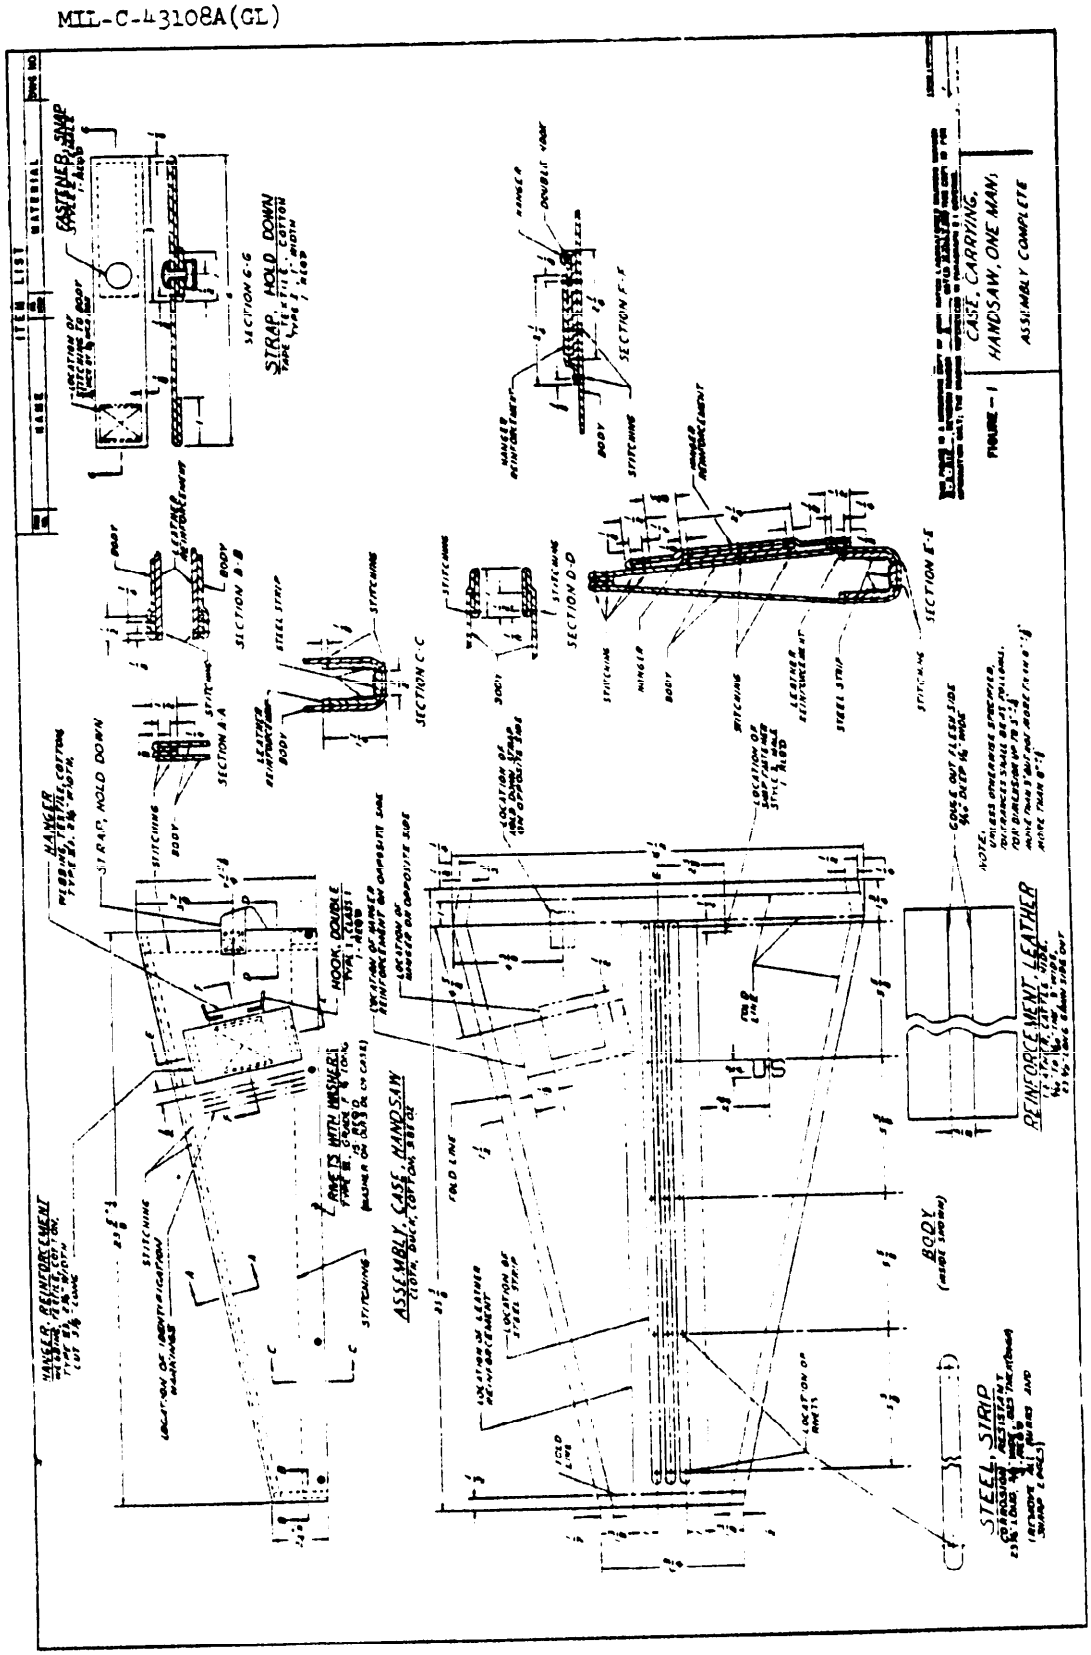

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:43Z
Check the source to verify that this is the currentversion before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Case, Carrying, Handsaw, One Man MIL-C-43108A(GL)

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:43Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-QS
Natick, Massachusetts 01760

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:43Z
Check the source to verify that this is the current version before use.