INCH - POUND


MIL-DTL-43098/36
13 September 2018

DETAIL SPECIFICATION SHEET

MEDALLION, CITIZENSHIP, NATIONAL SECURITY AGENCY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-43098.

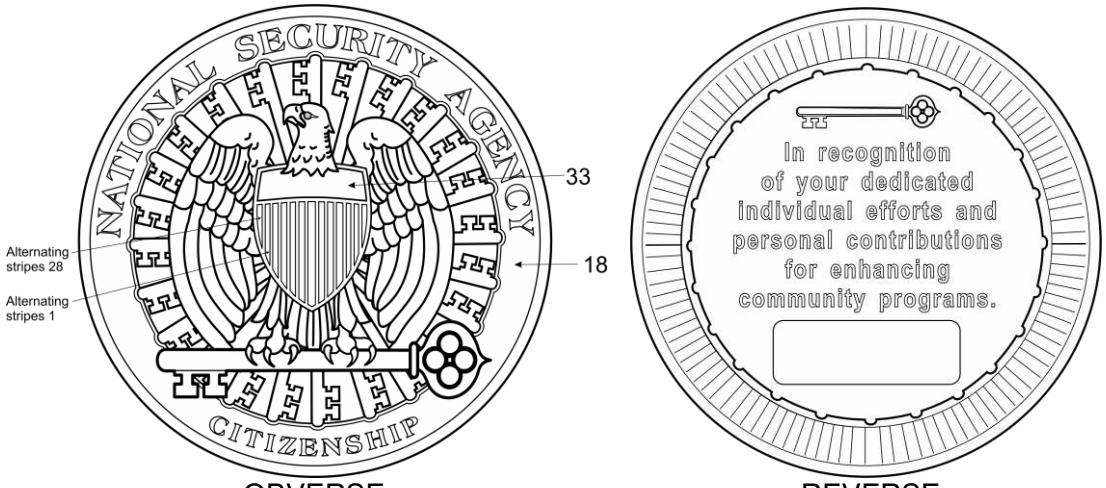

OBVERSE REVERSE

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, Brass, Oxidized, and Buffed Relieved and shall match The Institute of Heraldry (TIOH) Metal Finished Chip Number 4.

DIMENSIONS:
DIAMETER: 3 inches (REF)
THICKNESS (At edge): 0.240 inch ± 0.010 inch

DECOPRATION CASE: The decoration set shall consist of a medallion packaged in a presentation case conforming to MIL-C-14633, Type XV, Style 3 with a custom pad to be produced as part of the development.

EPOXY (Obverse only): Epoxy shall be applied to the medallion as indicated above and as specified below, and shall match TIOH Hard Enamel Color Chip Number listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:41Z
Check the source to verify that this is the current version before use.

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATIONS
Blue #18	Outer Designation Band
White #28	Flag stripes
Blue #33	Chief (Top) of Shield
Red #1	Flag Stripes

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished obverse hub or die.

2. Hard enamel may be used in lieu of epoxy. If enamel is used, the required base material for the medallion shall be Gilding Metal (UNS Alloy C-210).

Custodian:
Army - IH

Preparing activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8455-2018-247)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:41Z
Check the source to verify that this is the current version before use.