NOT MEASUREMENT SENSITIVE


MIL-DTL-43098/42
25 May 2021

DETAIL SPECIFICATION SHEET


MEDALLION, SURVIVOR RECOGNITION, U.S. CUSTOMS AND BORDER PROTECTION

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL- 43098

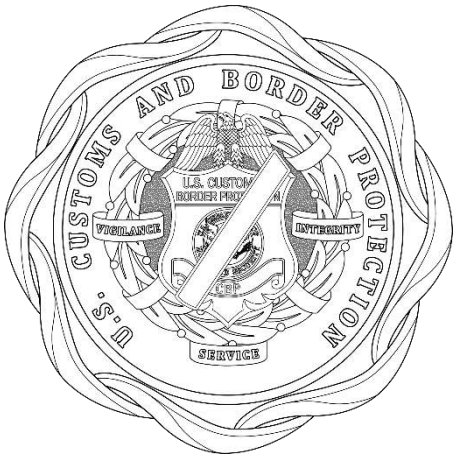


ASSEMBLED

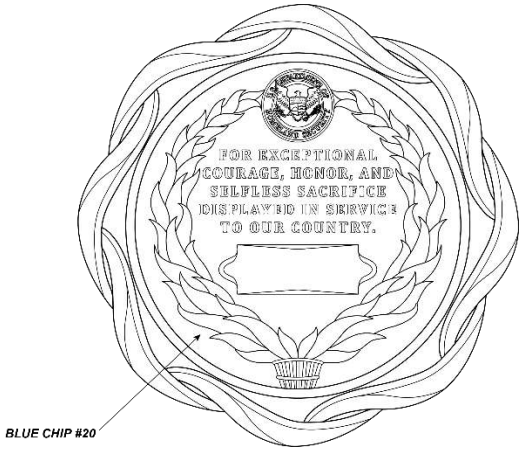

BASE/REVERSE

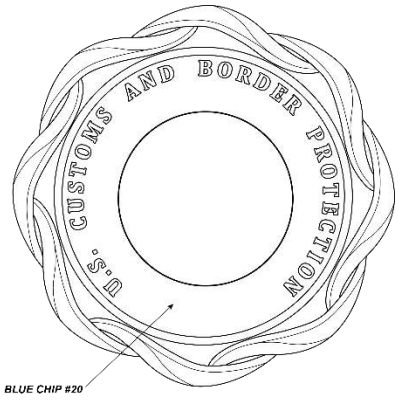

BASE/OBVERSE

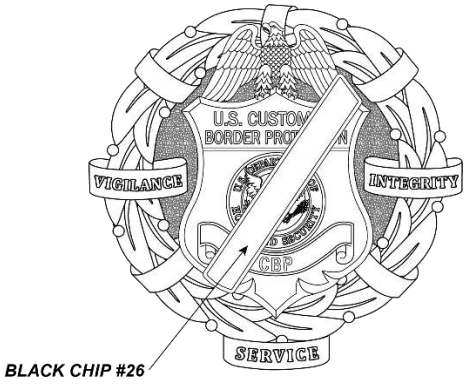

DEVICE

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:41Z
Check the source to verify that this is the current version before use.

FINISH: Epoxy resin, 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

DIMENSIONS:
HEIGHT:
BASE: 3 inches (REF)
DEVICE: 1-25/32 inches (REF)
WIDTH:
BASE: 3 inches (REF)
DEVICE: 1-13/16 inches (REF)
THICKNESS:
BASE: 0.265 inch $\pm$ 0.010 inch
DEVICE: 0.125 inch $\pm$ 0.010 inch
ASSEMBLED: 0.415 inch $\pm$ 0.015 inch

ATTACHING DEVICE: The device shall be attached and swaged to the base using two rivets. The rivets shall be placed on the vertical centerline 3/16th inch from the top and bottom of the device. Glue can also be used in addition to the rivets to further secure the device to the base.

MEDALLION SET: set shall consist of a medallion and lapel button all packaged in a decoration case conforming to MIL-DTL-14633, Type II with a Class 9 pad. *(Old Type 15 Case)* The name on the case shall read: Line 1: U.S. CUSTOMS AND Line 2: BORDER PATROL Line 3: SURVIVOR Line 4: RECOGNITION.

EPOXY: Epoxy resin shall be applied to the medallion as indicated below, and shall match TIOH Hard Enamel Color Chip Numbers listed below. The base obverse and device shall have stoned epoxy. The base reverse shall have floating epoxy.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR CHIP	**LOCATION**
Blue #20	Base/obverse background and Base/reverse background
Black #26	Stripe on device

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The Specification slash sheet for the Lapel Button is MIL-DTL-11484/440.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:41Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-533)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:41Z
Check the source to verify that this is the current version before use.