MIL-F-43101A (GL)
29 MAY 1967
SUPERSEDING
MIL-F-43101 (QMC)
8 AUGUST 1962

MILITARY SPECIFICATION

FILING CABINET, LETTER SIZE DESIGN, STEEL, OD, ONE DRAWER HIGH, ONE DRAWER WIDE

1. SCOPE

1 1 **Scope.** This specification covers one type and size filing cabinet

2 APPLICABLE DOCUMENTS

2 1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein

SPECIFICATIONS

FEDERAL

QQ-S-634 — Steel, Bar, Carbon, Cold Finished, (Standard Quality)

QQ-S-698 — Steel, Sheet and Strip, Low-Carbon

TT-C-490 — Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.

TT-E-529 — Enamel, Alkyd, Semigloss

TT-P-636 — Primer Coating, Synthetic, Wood and Ferrous Metal

PPP-B-636 — Box, Fiberboard

MILITARY

MIL-M-20693 — Plastic Molding Material, Polyamide (Nylon), Rigid

STANDARDS

FEDERAL

Fed Test Method Std No. 151 — Metals, Test Methods

Fed Std No 595 — Colors

MILITARY

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes

MIL-STD-129 — Marking for Shipment and Storage

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

MIL-STD-130 — Identification Marking of U.S. Military Property

MS 35793 — Handle, Bail, Chest, Surface Mounting, Plain Holes

DRAWINGS

U.S. ARMY NATICK LABORATORIES

5-13-211 — Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Instruction Sheet

5-13-2115 — Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide; Assembly Complete

5-13-2116 — Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Drawer Assembly

5-13-2117 — Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Back Assembly, Drawer

5-13-2118 — Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide; Body Assembly

5-13-2119 — Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide; Follower Assembly.

5-13-2124 — Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Body Details

(Miniature copy of Drawings 5-13-211 and 5-13-2115 identified as figures 1 and 2 are attached for information purposes only)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer)

3 REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished filing cabinet covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production filing cabinets.

3.2 Materials. Materials not definitely specified shall conform to the quality normally used for the purpose in standard industry practice.

3.2.1 *Steel.*

3.2.1.1 *Low carbon, cold rolled sheet and strip.* Low carbon cold rolled steel sheet and strip shall conform to 1009-1020, commercial quality (CRCQ), or temper No. 3 respectively of QQ-S-698.

3.2.1.2 *Low carbon, hot rolled, sheet and strip.* Low carbon hot rolled sheet and strip shall conform to commercial quality

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

(HRCQ), pickled and oiled finish (PO), 1009–1020 of QQ–S–698

3.2.1.3 *Spring, flat, carbon, cold rolled sheet, general purpose.* General purpose carbon spring steel shall conform to 70 – 80 percent carbon commercial grade flat spring quality

3.2.1.4 *Carbon, cold finished, bar* Cold finished carbon bar shall be 1010 or 1015, condition ACD, annealed and cold drawn, any applicable form of QQ–S–634

3.2.2 *Plastic molding (nylon)* Nylon shall conform to any color, composition A, type I or composition B, type IV or IVA of MIL–M–20693

3.2.3 *Primer* Primer shall conform to TT–P–636

3.2.4 *Enamel* Enamel shall conform to class B of TT–E–529 The color shall be olive drab no X24087 of Fed Std No 595.

3.3 Construction. The construction of the filing cabinet shall conform to the design and details shown on Drawings 5–13–2115 through 5–13–2119, 5–13–2124, and as specified herein

3.3.1 *Body* The cabinet body shell, closed and open end supports, channels, reinforcement and rear body plates, shall be fabricated from steel specified in 3 2 1 1 The holder, lock lever, bar, slip key and bracket, and lock bar shall be fabricated of steel specified in 3.2.1.2

3.3.2 *Drawer* The drawer assembly and the follower assembly, except for the spring, handle, and rollers shall be fabricated from steel specified in 3.2.1 1. The drawer shall mount into the body and the drawer suspension system shall operate smoothly without binding The follower assembly shall adjust to the full depth of the drawer and shall be removable without special tools.

3.3.2.1 *Spring* The spring on the follower assembly shall be fabricated from steel specified in 3.2.1.8.

3.3.2.2 *Handle* The handles with mounting plate, on the complete drawer assembly shall conform to MS 35793–1 except that the material for the mounting plate shall be as specified in 3 2 1 1 and the material for the handle shall conform to 3.2 1 4

3.3 2.3 *Rollers and glides* The rollers on the rear upright assemblies of the drawer and the glides on the bottom front of the body shall be fabricated of nylon specified in 3 2 2

3.3.3 *Welding* Surfaces to be welded shall be cleaned and free of rust, scale, corrosion, oil, and other foreign matter

3.3.4 *Riveting* Holes for rivets containing burrs that would prevent seating of rivets, shall have burrs removed Rivets, when driven shall have heads in full contact with the surface of the contacting metal. Rivets shall be securely peened or clinched. Rivet heads shall not be cracked or split.

3.4 Finish.

3.4.1 *Surface pretreatment* After fabrication, all surfaces of the filing cabinet shall be pretreated in accordance with type I or II of TT–C–490.

3.4.2 *Priming* After pretreatment specified in 3 4 1 all surfaces of the filing cabinets shall be coated with primer specified in 3.2.3

3.4.3 *Enameling* After priming specified in 3 4 2, all surfaces of the filing cabinet shall be coated with enamel specified in 3.2.4

3.5 Instruction sheet. Each filing cabinet shall be furnished with an 8 by 10½ inch instruction sheet in accordance with drawing 5–13–211 The instruction sheet shall be placed inside the filing cabinet between the front panel and the follower.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

3.6 Marking. The filing cabinet shall be marked in accordance with MIL–STD–130

3.7 Workmanship. All surfaces shall be free of burrs, slivers, rough or sharp edges. Components shall not be broken, cracked, split or malformed. Welds shall be sound and free from porosity, cracks, or incomplete fusion. All welds shall be smooth and free from pits, flashes and burn through. Enamel shall level out to a uniform dry film thickness without runs, drops or areas of no film. The coating shall be free from imbedded foreign matter and shall show no evidence of peeling, flaking or blistering.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, it shall be examined for defects in table II and dimensions specified.

4.3 Sampling for inspection. Sampling for inspection shall be performed in accordance with the provisions set forth in MIL–STD–105, except where otherwise indicated.

4.3.1 *Component and material inspection.* In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1.1 *Spring steel carbon content analysis.* Spring steel shall be analyzed for carbon content in accordance with method 111 or method 112 of Fed. Test Method Std. 151. Two samples shall be taken from each lot of material unless the lot consists of only one piece, in which case, one sample shall be taken. Failure of any sample to comply shall be cause for rejection of the lot.

4.3.2 *In process examination.* Examination shall be made during the manufacturing process for requirements specified in table I. Whenever nonconformance is noted, correction shall be made to affected items and process.

TABLE I. *In-process examination*

Requirement	Requirement paragraph
Surfaces cleaned prior to welding	3.3.3
Rivet hole burrs removed prior to riveting	3.3.4
Surface pretreatment	3.4.1
Priming	3.4.2

4.3.3 *End item inspection.* The lot shall consist of all completely fabricated filing cabinets offered for inspection at one time. The sample unit shall be one completely fabricated filing cabinet.

4.3.3.1 *Visual examination.* Examination shall be made of the end item for defects in table II. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

TABLE II *Classification of defects*

Examine	Defect	Classification	
		Major	Minor
Finish	Not as specified	X	
	Not color specified		X
	Area of no film		X
	Not continuous or is not smooth		X
	Contains runs, drops, or streaks		X
	Foreign matter imbedded		X
	Evidence of peeling, flaking, or blistering	X	
Construction and workmanship			
Body and drawer assemblies	Any component missing	X	
	Any component not attached as specified	X	
	Drawer will not mount without binding	X	
	Drawer suspension system does not operate smoothly	X	
	Latching mechanism does not function	X	
	More than one rivet missing on handle mounting plate	X	
	One rivet missing on handle mounting plate		X
	Cord holder or handle plate not attached flush		X
	Lever lock missing	X	
	Rear upright assembly rollers bind or do not rotate freely		X
Back Assembly	Component missing or not attached as specified	X	
Follower Assembly	Component missing or not attached as specified	X	
	Does not adjust the full depth of drawer		X
	Cannot be removed without special tools		X
Welding	More than one spot weld missing, broken, or not fused where specified	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

TABLE II. *Classification of defects*—Continued

Examine	Defect	Classification	
		Major	Minor
	One spot weld missing, broken, or not as specified		X
	Spot welds not spaced as specified		X
	Not sound and free from porosity		X
	Contains flashes or burn through		X
Riveting	Loose or improperly set	X	
	Not fully clinched or peened		X
	Head cracked or split		X
Marking	Missing, illegible, incomplete, misspelled, or not as specified		X
Instruction Sheet	Missing or not as specified	X	
	Not in proper location		X

4.3.3.2 *Dimensional examination.* Examination shall be made of the filing cabinet for compliance with dimensions specified Any deviation therefrom shall constitute a defect The inspection level shall be S–2 with an AQL of 4 0, expressed in terms of defects per hundred units

4.3.4 *Examination of preparation for delivery requirements.* An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with Defects shall be scored in accordance with table III The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot shall be the number of shipping containers offered for delivery at one time. The inspection level shall be S–2 and the AQL shall be 4.0 expressed in terms of defects per hundred units

TABLE III *Examination of preparation for delivery*

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing or damaged
Workmanship	Inadequate application of components such as incomplete closure of container flaps, case liner loose strappings or tape banding, and inadequate stapling
	Bulging or distortion of containers

5. PREPARATION FOR DELIVERY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

5.1 **Packaging** Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A* The drawer of each filing cabinet shall be closed and the locking device secured in the locked position by minimum 0.055 inch diameter annealed wire. The handles shall be secured from movement with tape.

5.1.2 *Level C* Filing cabinets shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 **Packing.** Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 *Level A* Each filing cabinet, packaged as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2, of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding shall be in accordance with PPP-B-636.

5.2.2 *Level B* Each filing cabinet, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be fabricated from grade $V3_t$ or $V3_s$ fiberboard and closed in accordance with the appendix of PPP-B-636.

5.2.3 *Level C* Filing cabinets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 **Marking.** In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6 NOTES

6.1 **Intended use.** The filing cabinet covered by this specification is used to transfer and maintain records in the field.

6.2 **Ordering data.** Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) When preproduction sample is not required (see 3.1).

(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(d) When $V3_t$ or $V3_s$ fiberboard is required for level B pack (see 5.2.2.1).

Custodian:

Army—GL

Preparing activity:

Army—GL


Project No. 7110-A047

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

MIL–F–43101A(GL)

STACKING FILE CABINETS

THESE FILE CABINETS ARE MADE SO THEY CAN BE STACKED UP TO 4 OR 5 HIGH. WHEN THEY ARE STACKED, THEY MUST BE LATCHED TOGETHER TO PREVENT TIPPING. A LATCHING DEVICE IS LOCATED INSIDE THE TOP FRONT OF EACH CABINET.

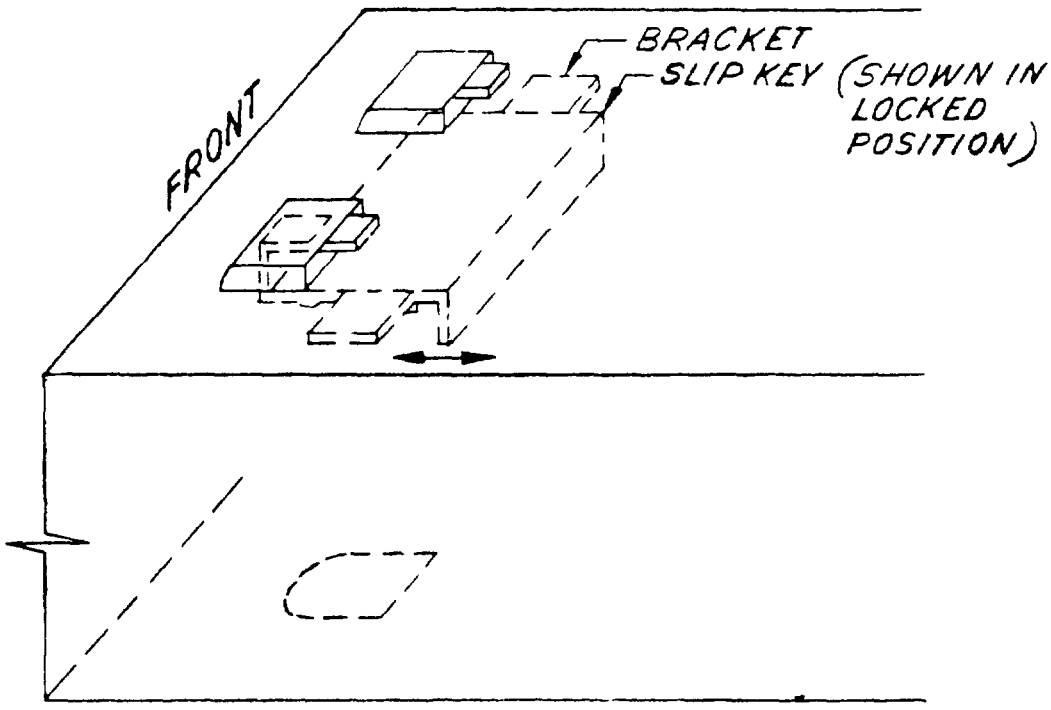

TO STACK

1. REMOVE DRAWERS OF CABINETS TO BE STACKED
2. PUT SHELL OF SECOND CABINET ON TOP OF BOTTOM SHELL. BE SURE THE PRONGS AND HOLES ON THE BOTTOM OF THE SECOND MATE WITH THE RAISED PROJECTIONS ON THE BOTTOM SHELL
3. REACH INSIDE THE TOP FRONT OF THE BOTTOM SHELL AND PUSH THE SLIP KEY AWAY FROM YOU. CHECK TO SEE THAT THE PRONGS ARE LOCKING ONTO THE SECOND SHELL YOU MAY HAVE TO PUSH DOWN ON THE UPPER SHELL TO LOCK
4. LIFT GENTLY ON THE SECOND SHELL TO BE SURE IT IS LOCKED FRONT AND BACK
5. REPEAT FOR OTHER DRAWERS IN STACK
6. REPLACE DRAWERS

NOTE. WHEN MOVING FILING CABINETS, THEY MUST BE UNLATCHED AND MOVED SEPERATELY.

INSTRUCTION SHEET

FIGURE 1 5-13-211

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

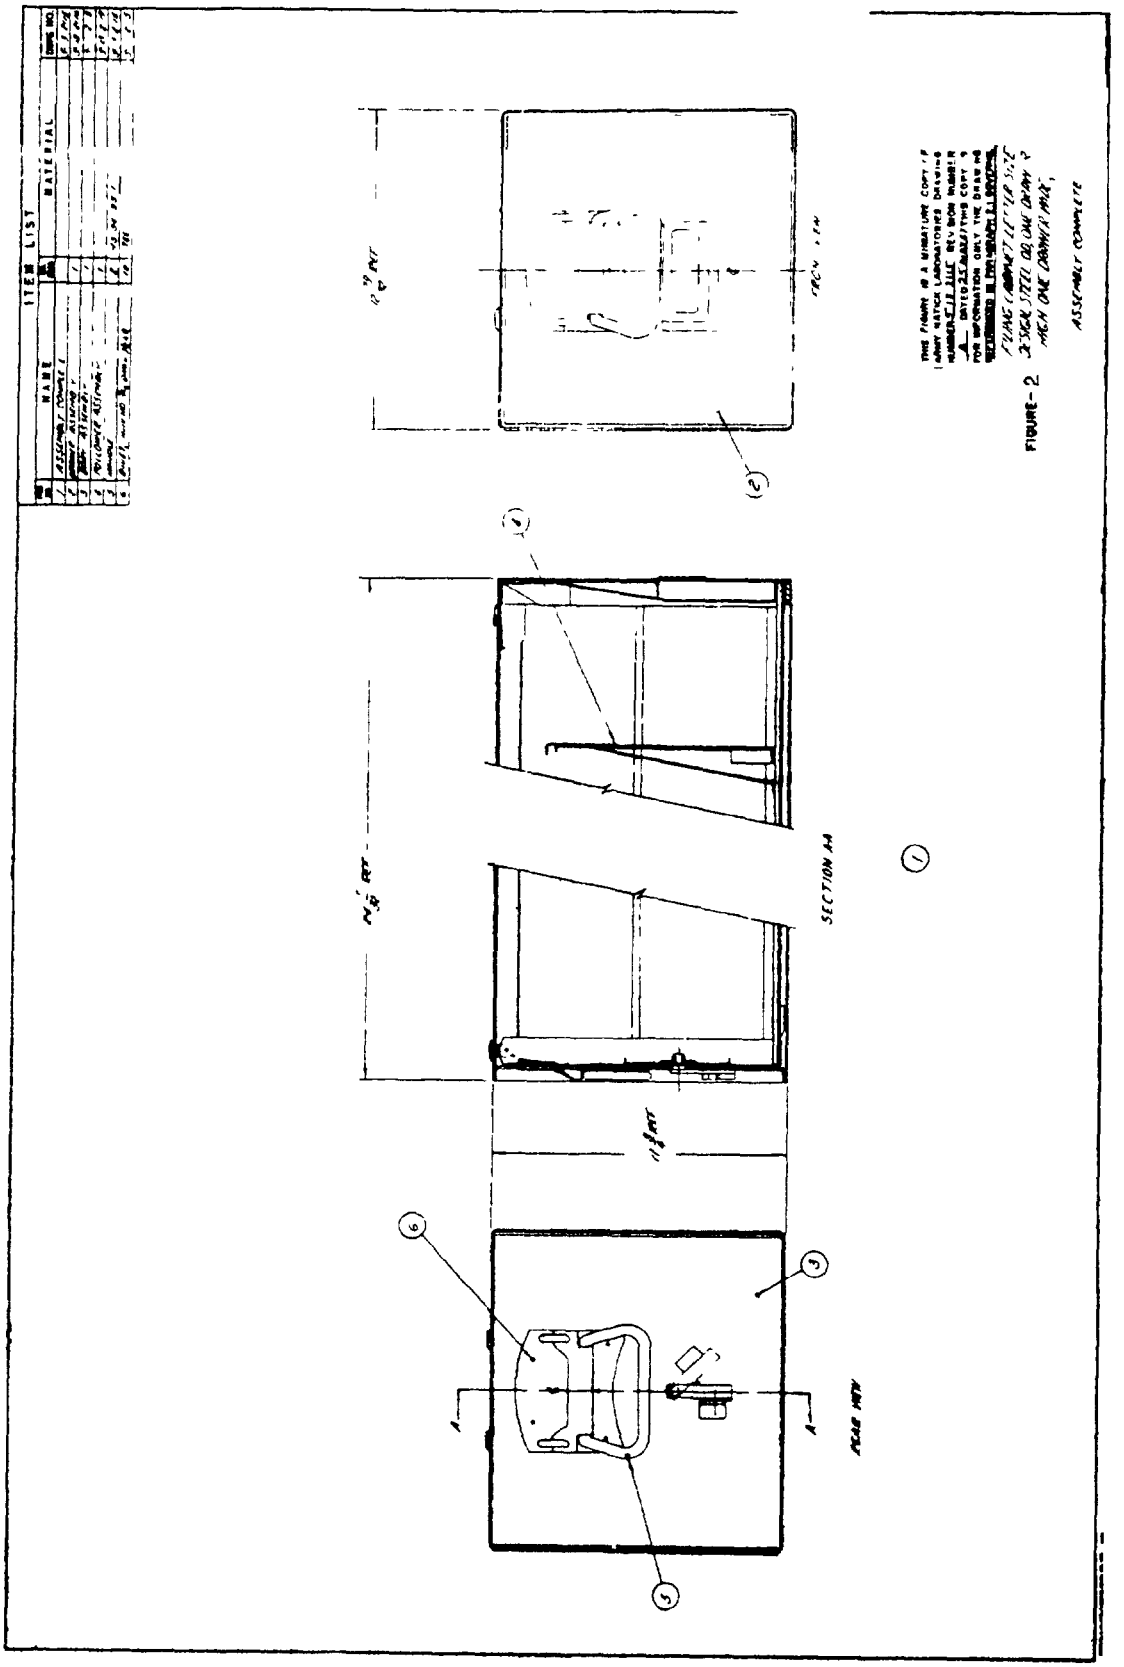


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION: Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide - MIL-F-43101A (GL)

ORGANIZATION | CITY AND STATE

CONTRACT NO | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity) | DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-QS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.