INCH-POUND

MIL-DTL-43101B
11 January 2013
SUPERSEDING
MIL-F-43101A
29 May 1967

DETAIL SPECIFICATION

FILING CABINET, LETTER SIZE DESIGN, STEEL, OD, ONE DRAWER HIGH, ONE DRAWER WIDE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size filing cabinet.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this standard. This section does not include documents cited in other sections of this standard or recommend for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this standard, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

FEDERAL SPECIFICATIONS

QQ-S-698	Steel, Sheet and Strip, Low Carbon
TT-C-490	Chemical Conversion Coatings and Pretreatments for Ferrous Surfaces (Base for Organic Coatings)

FEDERAL STANDARDS

FED-STD-595/24084	Green, Semigloss

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-53030	Primer Coating, Epoxy, Water Based, Lead and Chromate Free

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center Philadelphia (DSCP), ATTN: DSCP-NASA, 700 Robbins Avenue, Philadelphia, PA 19111-5096 or e-mail to dscpg&ispecomments@dla.mil . Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil .

AMSC N/A FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-130	Identification Marking of U.S. Military Property

(Copies of these documents are available online at https://assist.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DRAWINGS

U.S. ARMY NATICK SOLDIER RESEARCH DEVELOPMENT AND ENGINEERING CENTER

5-13-211	Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Instruction Sheet
5-13-2115	Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Assembly Complete
5-13-2116	Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Drawer Assembly
5-13-2117	Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Back Assembly, Drawer
5-13-2118	Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Body Assembly
5-13-2119	Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Follower Assembly
5-13-2124	Filing Cabinet, Letter Size Design, Steel, OD, One Drawer High, One Drawer Wide, Body Details

(Miniature copy of Drawings 5-13-211 and 5-13-2115 identified as figures 1 and 2 are attached for information purposes only.)

(Copies of these documents are available from Natick Soldier Research Development and Engineering Center, Kansas Street Bldg. 3, Natick, MA 01760.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ Z1.4	Sampling Procedures and Tables for Inspection by Attributes.

(Copies of this document are available from www.asq.org or the American Society for Quality, 600 North Plankinton Avenue, Milwaukee, WI 53203.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A108	Plate, Brass, Sheet Strip, and Rolled Bar
ASTM D4066	Nylon Injection and Extrusion Materials (PA)
ASTM E1282	Density and Specific Gravity (Relative Density) of Plastics by Displacement

(Copies of these documents are available from www.astm.org or the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

MASTER PAINTERS INSTITUTE (MPI)

MPI #94	Alkyd, Exterior, Semi-Gloss (MPI Gloss Level 5)

(Copies of this document are available from www.paintinfo.com/mpi or the Master Painters Institute Inc., 2800 Engleton Avenue, Burnaby, BC CANADA V5C 6G7.)

NATIONAL AEROSPACE STANDARDS (NAS)

NASM35793	Handle, Bail-Chest, Surface Mounting, Plain Holes

(Copies of this document are available from www.aia-aerospace.org or the Aerospace Industries Association of America 1250 Eye Street,N.W., Suite 1200 Washington, DC, United States, 20005-3924.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), samples shall be subjected to first article inspection in accordance with 4.2.

3.2 Materials. Materials not definitely specified shall conform to the quality normally used for the purpose in standard industry practice.

3.2.1 Steel.

3.2.1.1 Low carbon, cold rolled, sheet and strip. Low carbon cold rolled steel sheet and strip shall conform to 1009–1020, commercial quality (CRCQ), or temper No. 3 respectively of QQ-S-698.

3.2.1.2 Low carbon, hot rolled, sheet and strip. Low carbon hot rolled steel sheet and strip shall conform to commercial quality (HRCQ), pickled and oiled finish (PO), 1009-1020 of QQ-S-698.

3.2.1.3 Spring, flat, carbon, cold rolled sheet, general purpose. General purpose carbon spring steel shall conform to 70 – 80 percent carbon commercial grade flat spring quality.

3.2.1.4 Carbon, cold finished, bar. Cold finished carbon bar shall be 1010 or 1015, condition ACD, annealed and cold drawn, any applicable form of ASTM A108.

3.2.2 Plastic molding (nylon). Nylon shall conform to any color, Group PA01, Class 1, Grades 1 thru 4 or Group PA02, Class 1, Grades 1 thru 4 of ASTM D4066.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

3.2.3 Primer. Enamel shall conform to Type II of MIL-DTL-53030.

3.2.4 Enamel. Enamel shall conform to Master Painters Institute, Reference #94, Exterior Alkyd, Semi-Gloss, MPI Gloss Level 5. The color shall be green, FED-STD-595/24084.

3.3 Construction. The construction of the filing cabinet shall conform to the design and details shown on Drawings 5-13-2115 through 5-13-2119, 5-13-2124 and as specified herein (see figure 2).

3.3.1 Body. The cabinet body shell, closed and open end supports, channels, reinforcements and rear body plates, shall be fabricated from steel specified in 3.2.1.1. The holder, lock lever, bar, slip key and bracket and lock bar shall be fabricated of steel specified in 3.2.1.2.

3.3.2 Drawer. The drawer assembly and the follower assembly, except for the spring and handle shall be fabricated from steel specified in 3.2.1.1. The drawer shall mount into the body and the drawer suspension system shall operate smoothly without binding. The follower assembly shall adjust to the full depth of the drawer and shall be removable without special tools.

3.3.2.1 Spring. The spring on the follower assembly shall be fabricated from steel specified in 3.2.1.3.

3.3.2.2 Handle. The handles with mounting plate, on the complete drawer assembly shall conform to NASM35793, part number MS35793-1 except that the material for the mounting plate shall be as specified in 3.2.1.1 and the material for the handle shall conform to 3.2.1.4.

3.3.2.3 Glides. The glides on the bottom front of the body shall be fabricated of nylon specified in 3.2.2.

3.3.3 Welding. Surfaces to be welded shall be cleaned and free of rust, scale, corrosion, oil and other foreign matter.

3.3.4 Riveting. Holes for rivets containing burrs that would prevent seating of rivets shall be removed. Rivets, when driven shall have heads in full contact with the surface of the contacting metal. Rivets shall be securely peened or clinched. Rivet heads shall not be cracked or split.

3.4 Finish.

3.4.1 Surface pretreatment. After fabrication, all surfaces of the filing cabinet shall be pretreated in accordance with Type I or II of TT-C-490.

3.4.2 Priming and enameling. Surfaces, pretreated as specified in 3.4.1, shall be coated with primer specified in 3.2.3. The primed surfaces shall then be coated with enamel specified in 3.2.4. Primer may be omitted from any surface prepared for painting in accordance with 3.4.1, provided not less than two coats of enamel are applied.

3.5 Instruction sheet. Each filing cabinet shall be furnished with an 8 by 10.5 inch instruction sheet in accordance with drawing 5-13-211 (see figure 1). The instruction sheet shall be placed inside the filing cabinet between the front panel and the follower.

3.6 Marking. The filing cabinet shall be marked in accordance with MIL-STD-130.

3.7 Workmanship. All surfaces shall be free of burrs, slivers, rough or sharp edges. Components shall not be broken, cracked, split or malformed. Welds shall be sound and free from porosity, cracks or incomplete fusion. All welds shall be smooth and free from pits, flashes and burn through. Enamel shall level out to a uniform dry film thickness without runs, drops or areas of no film. The coating shall be free from imbedded foreign matter and shall show no evidence of peeling, flaking or blistering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspection. The inspection of filing cabinets shall be classified as follows:

(a) First article inspection (see 4.2)
(b) Conformance inspection (see 4.3)

4.2 First article inspection. When a first article sample is required, it shall be examined for defects in Table II and dimensions specified.

4.3 Conformance inspection. Conformance inspection shall include paragraphs 4.3.1 through 4.3.4. Sampling for inspection shall be performed in accordance with the provisions set forth in ASQ Z1.4, except where otherwise indicated.

4.3.1 Component and material inspection. Components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1.1 Spring steel carbon content analysis. Spring steel shall be analyzed for carbon content using either chemical analysis in accordance with ASTM E1282 or an applicable spectrochemical analysis test method. Two samples shall be taken from each lot of material unless the lot consists of only one piece, in which case, one sample shall be taken. Failure of any sample to comply shall be cause for rejection of the lot.

4.3.2 In process examinations. Examination shall be made during the manufacturing process for requirements specified in Table I. Whenever nonconformance is noted, correction shall be made to affected items and process.

TABLE I. In process examination.

Requirement	Requirement Paragraph
Surfaces cleaned prior to welding	3.3.3
Rivet hole burrs removed prior to riveting	3.3.4
Surface pretreatment	3.4.1
Priming when applicable	3.4.2

4.3.3 End item inspection. The lot shall consist of all completely fabricated filing cabinets offered for inspection at one time. The sample unit shall be one completely fabricated filing cabinet.

4.3.3.1 Visual examination. Examination shall be made of the end item for defects in Table II. The inspection level shall be level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects.

Examine	Defect	Classification	
		Major	Minor
Finish	Not as specified	X	
	Not color specified		X
	Area of no film		X
	Not continuous or is not smooth		X
	Contains runs, drops or streaks		X
	Foreign matter imbedded		X
	Evidence of peeling, flaking or blistering	X	
Construction and workmanship			
Body and drawer assemblies	Any component missing	X	
	Any component not attached as specified	X	
	Drawer will not mount without binding	X	
	Drawer suspension system does not operate smoothly	X	
	Latching mechanism does not function	X	
	More than one rivet missing on handle mounting plate	X	
	One rivet missing on handle mounting plate		X
	Cord holder or handle plate not attached flush		X
	Lever lock missing	X	
	Rear upright assembly rollers bind or do not rotate freely		X
Back Assembly	Component missing or not attached as specified	X	
Follower Assembly	Component missing or not attached as specified	X	
	Does not adjust the full depth of drawer		X
	Cannot be removed without special tools		X
Welding	More than one spot weld missing, broken or not fused where specified	X	

4.3.3.2 Dimensional examinations. Examinations shall be made of the filing cabinet for compliance with dimensions specified. Any deviation therefrom shall constitute a defect. The inspection level shall be S-2.

4.3.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with Table III. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot shall be the number of shipping containers offered for delivery at one time. The inspection level shall be S-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

TABLE III. Examine of preparation for delivery.

Examine	Defect
Marking Materials Workmanship	Omitted, incorrect, illegible, of improper size, location, sequence or method of application Any component missing or damaged Inadequate application of components such as incomplete closure of container flaps, case liner loose strappings or tape banding and inadequate stapling Bulging or distortion of containers

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The filing cabinet covered by this specification is used to transfer and maintain records in the field.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. If first article samples are required (see 3.1).
c. Packaging requirements (see 5.1).


6.3 Subject term (key word) listing.

Glide
Handle
Rivet
Roller
Spring

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

STACKING FILE CABINETS

THESE FILE CABINETS ARE MADE SO THEY CAN BE STACKED UP TO 4 OR 5 HIGH. WHEN THEY ARE STACKED, THEY MUST BE LATCHED TOGETHER TO PREVENT TIPPING. A LATCHING DEVICE IS LOCATED INSIDE THE TOP FRONT OF EACH CABINET.

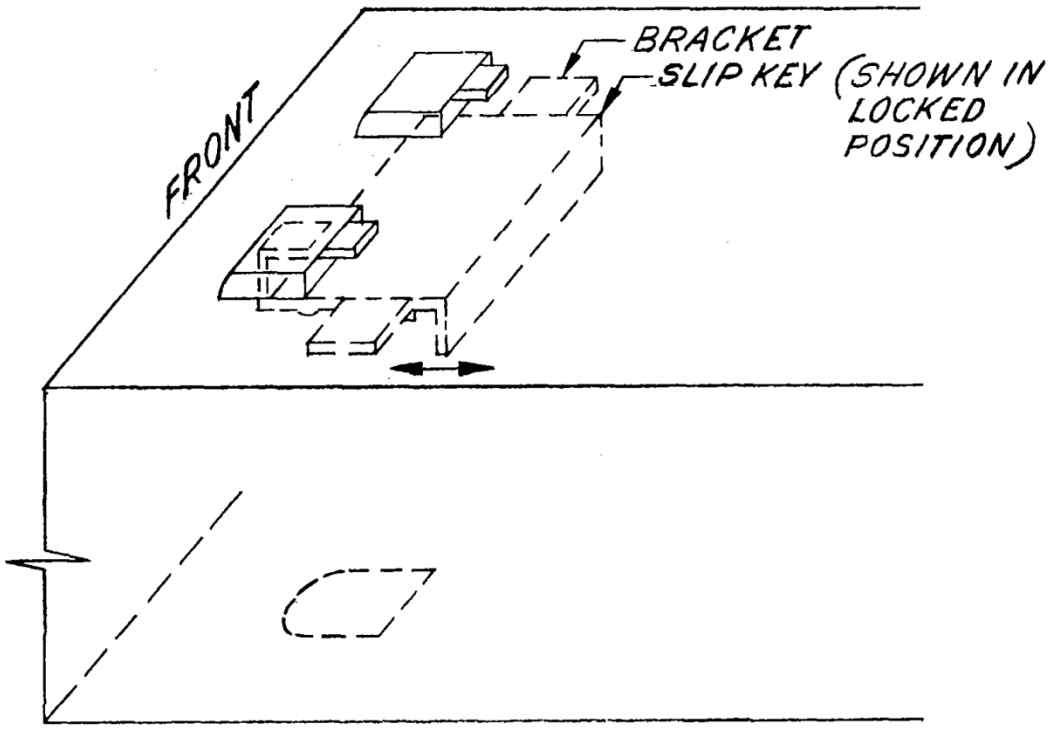

TO STACK

1. REMOVE DRAWERS OF CABINETS TO BE STACKED.
2. PUT SHELL OF SECOND CABINET ON TOP OF BOTTOM SHELL. BE SURE THE PRONGS AND HOLES ON THE BOTTOM OF THE SECOND MATE WITH THE RAISED PROJECTIONS ON THE BOTTOM SHELL.
3. REACH INSIDE THE TOP FRONT OF THE BOTTOM SHELL AND PUSH THE SLIP KEY AWAY FROM YOU. CHECK TO SEE THAT THE PRONGS ARE LOCKING ONTO THE SECOND SHELL. YOU MAY HAVE TO PUSH DOWN ON THE UPPER SHELL TO LOCK.
4. LIFT GENTLY ON THE SECOND SHELL TO BE SURE IT IS LOCKED FRONT AND BACK.
5. REPEAT FOR OTHER DRAWERS IN STACK
6. REPLACE DRAWERS.

NOTE: WHEN MOVING FILING CABINETS, THEY MUST BE UNLATCHED AND MOVED SEPERATELY.

INSTRUCTION SHEET 5-13-211

FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

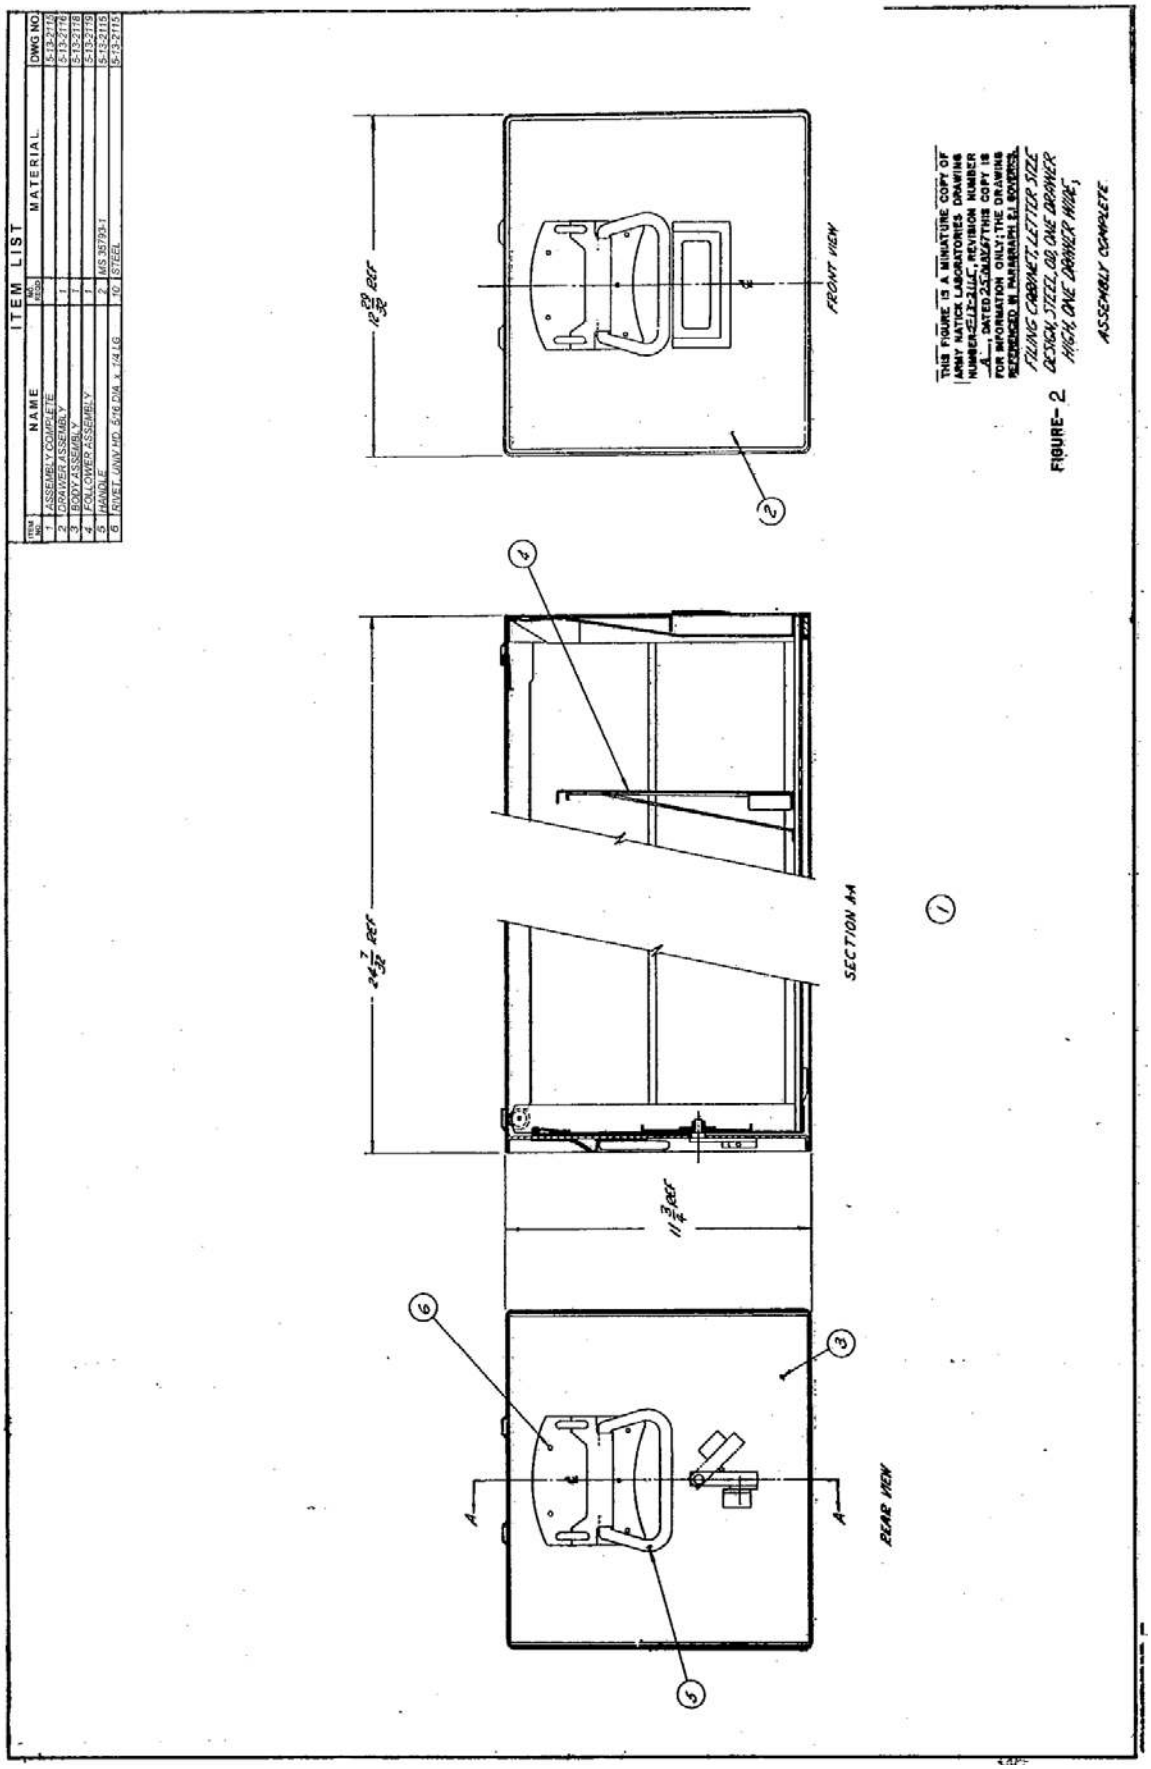


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army – GL

Preparing Activity:
DLA – IS

(Project 7110-2013-001)

NOTE: The activities listed above were interested in this document as of the date of document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:42Z
Check the source to verify that this is the current version before use.