MILITARY SPECIFICATION

BELTS, COAT, MAN'S: WOOL; POLYESTER/WOOL

1. SCOPE

*1.1 Scope. This specification covers requirements for wool gabardine, wool serge and polyester/wool belts.

*1.2 Classification. The belts shall be of the following types and sizes as specified (see 6.2).

Type I - Wool, Gabardine; Blue shade 2316
Type II - Wool, Serge; Green shade 2234
Type III - Polyester/Wool; Green shade 2235

Schedule of sizes

30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 48

NOTE: Belt sizes correspond to sizes of coats with which the belts are worn.

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, And Button, Staple, (Plastic).
V-T-276	- Thread, Cotton.
V-T-301	- Thread, Silk.
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
CCC-C-438	- Cloth, Buckram, Cotton.
DDD-L-20	- Label; For Clothing, Equipage, And Tentage, (General Use).

MILITARY

MIL-C-368	- Cloth, Satin, Rayon And Cloth, Twill, Rayon.
MIL-C-823	- Cloth, Serge, Wool, Wool And Nylon.
MIL-C-10176	- Cloth, Gabardine: Wool, Polyester And Wool.
MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes).
MIL-C-21115	- Cloth, Tropical Wool: Polyester/Wool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitch, Seam, And Stitching.

MILITARY

MIL-STD-105 - Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129 - Marking For Shipment And Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

*3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a finished belt shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

*3.3 Material.

*3.3.1 Basic material. The basic material for each type belt shall be as follows:

(a) Type I. Cloth, wool, gabardine, dark blue shade 2316 (see 6.3), 14-ounce, conforming to type I, class 5 of MIL-C-10176.

(b) Type II. Cloth, wool, serge, green shade 2234 (see 6.3), 15-ounce, conforming to type I, class 5 of MIL-C-823.

(c) Type III. Cloth, polyester/wool, green shade 2235 (see 6.3), conforming to type III of MIL-C-21115.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

*3.3.2 Lining. Material for lining types I and II belts and for the belt fastener for types I, II and III belts shall be cloth, rayon, twill, 3.7-ounce, conforming to class 1 of MIL-C-368, and shall be black, shade 2604, for type I and green, shade 2208, for types II and III belts.

*3.3.3 Belt interlining. Material for interlining the belts shall be cloth, buckram, cotton, natural color, conforming to type I, class 2, of CCC-C-438.

*3.3.4 Thread.

*3.3.4.1 Silk thread. Silk thread shall conform to V-T-301. Thread for machine sewing shall conform to type I, size A, 3-ply. The requirements for extractable material shall not apply.

*3.3.4.2 Cotton thread. Cotton thread shall conform to V-T-276, type IC2, mercerized finish, ticket No. A, 3-ply, for inside seaming and stitching, buttonholes, and sewing on snap fasteners, and type IB3, glazed finish, ticket No. 24, 4-ply for sewing on buttons.

*3.3.4.3 Color and colorfastness. Cotton and silk thread shall be dyed black, shade AA, Cable No. 66043 for type I belts and dyed shade T-1, Cable No. 66023 for type II and type III belts. The dyed thread shall show fastness to light and wet (dry) cleaning equal to or better than the standard sample. When no standard is available, the dyed thread shall show good fastness to light and wet (dry) cleaning and in addition, the silk thread shall show good fastness to light when tested as specified in thread specification.

*3.3.5 Identification and size marking (combined). Combination identification and size marking shall be applied to each belt by heat transfer (decalcomania), direct printing or stamping conforming to type III or type IV, class 4 of DDD-L-20, except the marking medium for type I and type II belts shall be of a contrasting color to the lining material. The belts are intended to be dry cleaned and the marking shall show fastness to dry cleaning.

*3.3.6 Buttons. Sewing hole buttons shall be melamine formaldehyde composition, glossy finish, conforming to type II, class D, style 4, 22-line of V-B-871. The color of the buttons for type I belts shall be black, Cable No. 62001 and for types II and III belts shall be green, Cable No. 62017 (see 6.3).

*3.3.7 Fastener, snap. Snap fasteners for type III belts shall be brass, black japanned finish, round or square style, rolled edge, size 1/0, sew-on type.

*3.4 Design. The belts shall be the U.S. Marine Corps design shown in Figures 1 and 2 having one end pointed on a 45-degree angle and the other end square to button over a removable buckle and provided with a sliding keeper of basic material and with a rayon belt fastener to button on the lining or under side as applicable for securing belt to coat.

*3.5 Patterns. Standard patterns for the belt will be furnished to the supplier by the Government. The standard pattern shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The supplier's working pattern shall be identical to the standard pattern. The standard pattern shows size and marks for placement of buttons and belt fastener.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

*3.5.1 List of pattern parts. Belts shall be cut from the materials specified herein in accordance with the number of pattern parts indicated below:

Materials	Pattern nomenclature	No. of cut parts
Cloth, Wool Gabardine	Belt	1
or		
Clothing, Wool Serge	Belt	1
or		
Cloth, Polyester/Wool	Belt (top ply)	1
	Belt (under ply)	1

*3.6 Construction.

*3.6.1 Manufacturing requirements. The belts shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I.

*3.6.1.1 Operations. The supplier is not required to follow the exact sequence of the operations as listed in Table I but all operations specified shall be used to manufacture the belts.

*3.6.1.2 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. All overedge stitching shall be done on serging machines with a knife attachment properly set to trim the raveled edge without cutting the material.

*3.6.1.2.1 Tacking and backstitching. Ends of seam and stitching produced with 301 type stitch, when not caught in the other seams or stitching, shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting.					
	a. Cut the belts in strict accordance with patterns furnished by the Government.					
	b. Cut all materials in the direction indicated by the directional lines on the pattern.					
	c. Cut all wool parts of the belt from one piece of basic material, except the following parts may be cut from ends, but when so cut, the parts shall harmonize with the shade of the belt: belt keeper and under ply of type III belt. Belt keeper may be banded 1 inch wide and under ply of type III belt may be cut from a banding machine 2-1/4 inches wide.					
	d. The rayon lining shall be cut 2-1/4 inches wide for type I and type II belts and the belt fastener for all three type belts shall be cut 1-5/8 inches wide.					
	e. Cut the cotton buckram interlining material for all three type belts on the straight 1-5/8 inches wide.					
2.	Replacement of damaged parts.					
	a. Replace, at time of cutting, all parts containing damages, such as holes or serious weakening defects such as smashes, multiple floats and slubs likely to develop into holes.					
	b. Replace all parts damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cuts, tears, holes mends and burns.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
3.	Make belt keeper.					
	Finished appearance. The belt keeper shall be uniformly stitched, uniform in width and shall finish smooth and flat without pleats, gathers, puckers or other distortion.					
	a. The belt keeper shall be made from a 1-inch wide strip of basic material.					
	b. Fold the sides of the strip lengthwise towards the center, abutting the raw edges, and join the raw edges together with a covering stitch, to finish 1/2 inch wide. The stitching shall be uniformly 1/8 inch from finished edges of the keeper.	406	EFh-1	12-16	A	A
	c. Cut the keeper 4-1/2 inches long, fold in half end to end, and join the ends with a bartack across the width of the keeper. The finished keeper shall measure 2-1/8 ±1/8 inches from bartack to folded end.	Bar-tack		28 per bartack (minimum)	A	A
4.	Make belt fastener.					
	Finished appearance. The belt fastener shall be uniformly stitched, uniform in width and shall finish smooth and flat without pleats, gathers, puckers or other distortion. The buttonhole shall be clean cut, well made and correctly positioned. The buttonhole shall be the straight type and shall be made to fit a 22-line sewing hole button. The purling of the buttonhole shall be on the outside of the fastener and the ends of the buttonhole securely tacked.					
	a. The belt fastener shall be made from 1-5/8-inch-wide strip of rayon lining material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
4.	**Make belt fastener.** (cont'd)					
	b. Fold the strip in half lengthwise, turn in raw edges, and stitch 1/8 inch from each side, catching the turned edges in the stitching, to form a 1/2 to 5/8 inch wide band. Cut the fastener 6-1/2 inches long.	301	EFp-2	12-16	A	A
	c. Turn under one end of the fastener 1-1/2 inches and make a horizontal straight type buttonhole, cut 5/8 inches long, through the center of the turned under portion, securely tacking each end of buttonhole.	But-ton hole		42 to 48 (minimum including tack)	A	A
5.	**Seam belt (types I and II.)**					
	Finished appearance. The belts shall be uniformly stitched and shall finish smooth and flat without twists, pleats, gathers, puckers, or raw edges. The stitching shall be uniformly 1/8 inch from the finished edges of the belt. The lining shall be 1/16 inch back from the finished edge of the belt.					
	a. The belts shall be made of one ply of basic material, lined with rayon twill and interlined with resin finish cotton buckram material.					
	b. Place the interlining material between the basic and lining materials and seam together uniformly 1/8 inch from upper and lower edges, with the raw side edges of lining and basic materials turned in and caught in the stitching. The stitching shall extend from one end of belt to approximately 1-1/4 inches from the opposite end.	301	SSc-1	12-16	A (silk)	A (silk)
6.	**Seam belt (type III).**					
	Finished appearance. The belt shall be uniformly stitched and shall finish smooth and flat without twists, pleats, gathers, puckers, or raw edges. The stitching shall be uniformly 1/8 inch from the finished edge of the belt.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
6.	**Seam belt (type III).** (cont'd)					
	a. The belt shall consist of a top and underply of basic material interlined with a single ply of resin finish cotton buckram material.					
	b. Place the interlining between the top and under ply components. Turn in the side edges of top and under ply components and seam all plies together 1/8 inch from the folded edges of the top ply catching the turned in portions in the stitching. The stitching shall extend from one end of the belt to approximately 1-1/4 inches from the opposite end.	301	EFn-2	12-16	A (silk)	A (silk)
7.	**Close ends of belt** (types I and II).					
	Finished appearance. The pointed end of the belt shall be well formed with the turned-in edges securely caught in the stitching.					
	a. Turn back the lining and basic materials at the top and bottom unseamed edges of the belt and trim the interlining approximately 1-1/4 inches back from the end.					
	b. Fold the end of the basic material in half lengthwise to the outside, and stitch across the width of the basic material 1/8 inch from the end.	301	SSa-1	12-16	A	A
	c. Turn the end of the belt, working out the point. Turn under the upper and lower edges of the lining and seam the lining to the belt 1/8 inch from the folded edges of the belt, closing the end and forming a point at the center of the finished end.	301	SSc-1	12-16	A (silk)	A (silk)
	d. Close the opposite end of the belt with overedge stitching.	502 or 503	EFd-1	10-14	A	A
			EFd-1	10-14	A	A
	e. The finished width of the belt shall be 1-3/4 inches (+1/16 -1/8 inch). The finished length of the belt for each size coat shall be as shown in Table II.					

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
8.	**Close ends of belt (type III).**					
	Finished appearance. The pointed end of the belt shall be well formed with the turned-in edges securely caught in the stitching.					
	a. Turn back the under and top ply of basic material at the top and bottom unseamed edges of the belt and trim the interlining approximately 1 inch back from the end.					
	b. Fold the top and under ply of the unseamed end of the belt in half lengthwise face to face, **and stitch each ply** respectively 1/8 inch from the end.	**301**	**SSa-1**	**12-16**	**A**	**A**
	c. Turn the ends of the top and under ply, working out the points. Position the two points even and stitch together 1/8 inch from folded and turned edges, closing the ends, forming a point at the center of the finished end.	**301**	**SSc-1**	**12-16**	**A (silk)**	**A (silk)**
	d. Close the opposite end of the belt with overedge stitching.	**502 or 503**	**EFd-1**	**10-14**	**A**	**A**
			EFd-1	**10-14**	**A**	**A**
	e. The finished width of the belt shall be 1-3/4 inches +1/16, -1/8 **inch. The finished length of the belt for each size coat shall be as shown in Table II.**					
9.	**Make buttonhole in belt.**					
	Finished appearance. The buttonhole shall be clean cut, well made and correctly positioned. The buttonhole shall be the straight type and shall be made to fit a 22-line sewing hole button. The purling of the buttonhole shall be on the outside of the belt and the ends of the buttonhole shall be securely tacked.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
9.	Make buttonhole in belt. (cont'd)					
	a. Make a horizontal, straight type buttonhole, cut 5/8 inch long, midway between upper and lower finished edges of the belt, with the center of the buttonhole 1 +1/8 inch from the overedge stitched end and with the ends of buttonhole securely tacked.	But-ton		50 per button-hole (minimum) (includ-ing tack)	A	A
10.	Sew on belt buttons.					
	Finished appearance. The buttons shall be positioned and securely sewn to the belt with the end of the stitching securely tacked.					
	a. Mark the location for sewing two 22-line sewing hole buttons to lining side of types I and II belts and underside of type III belt. The center of the button for the buckle end shall be 3-5/8 +1/8 inches from the overedge stitched end of belt. The button for the belt fastener shall be positioned in accordance with mark on pattern for each size belt.					
	c. Securely sew on button at each mark to properly engage buttonhole in buckle end of belt, and buttonhole in belt fastener. The belt fastener button for types I and II belts shall be sewn through the lining only. The belt fastener button for the type III belt shall be sewn through the underside and interlining only.	101 or Hand		21 per button (minimum) 3-4 (double thread)	24/4	
11.	Bartack fastener to belt.					
	Finished appearance. The belt fastener shall be smooth and flat without twisting or bulging when buttoned. The bartack shall extend across the entire width of the fastener and shall be finely stitched in order not to have an objectionable appearance on the outside of belt.					
	a. Mark location for sewing belt fastener to lining side of types I and II belts and underside of type III belt in accordance with mark on pattern for each size belt.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD Needle	THREAD Bobbin or Looper
11.	Bartack fastener to belt. (cont'd)					
	b. Turn under the raw end of the fastener 1/2 inch and bartack the fastener to the belt through all plies 1/8 to 3/16 inch from the folded edge.	Bar-tack		28 per bartack (minimum)	A (silk)	A
12.	Mark belt.					
	a. Mark the size and stock number (see 3.3.5) on the lining side or underside as applicable, of each belt at the center back.					
13.	Clean and press belt.					
	Finished appearance. The belt and belt keeper shall be clean and well pressed with the keeper properly attached and secured to the belt.					
	a. Trim all ends of stitching, and remove all loose ends of thread from belt. Remove all spots and stains from the belt without injury to the material.					
	b. Place the keeper on the belt at the square end and secure by buttoning the end. Press the belt and keeper smooth and flat with a heated pressing iron or pressing machine.					
14.	Attach snap fasteners (type III belts.)					
	Finished appearance. The snap fasteners shall be properly located and securely sewn to the belt.					
	a. Sew the socket part of the snap fastener to the underside through the interlining only, 1/2 to 5/8 inch from the point.	101 or		21 per fastener (minimum)	A	
		Hand		3-4 (double thread)	A	
	b. Sew the stud part of the snap fastener to the top ply through the interlining only, 3-1/2 to 3-3/4 inches from the folded end of the belt. When stud part is sewn by hand the stitching shall be tacked off not less than two stitches.	101 or		21 per fastener (minimum)	A	
		Hand		3-4 (double thread)	A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

*3.7 Finished measurements. The finished belts shall conform to the measurements shown in Table II.

Table II - Finished length measurement 1/

(All Type Belts)

Size (see 1.2)	Inches
30	34-1/2
32	35-1/2
33	36-1/2
34	37-1/2
35	38-1/2
36	39-1/2
37	40-1/2
38	41-1/2
39	42-1/2
40	43-1/2
41	44-1/2
42	45-1/2
43	46-1/2
44	47-1/2
46	49-1/2
48	51-1/2

1/ Tolerance on finished length +1/4 inch.
Measurement taken along the center from pointed end to overedge stitched end.

*3.8 Workmanship. The finished belts shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be made of a completely fabricated belt for conformance to all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, figures and standards, testing shall be performed on components listed in Table III for characteristics noted. All test reports shall contain the individual values utilized in expressing the final results.

*4.2.2.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified herein.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Component	Lot size expressed as	Sample unit for testing
Fastener, snap	1,000 sets	15 complete sets

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

Table III . Test methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Fastener snap	Material identification 1/	3.3.7	Std. Comml.	1	Pass or fail
	Finish	3.3.7	Std. Comml.	1	Pass or fail
	Size and type	3.3.7	Std. Comml.	1	Pass or fail

1/ Accept a certification of compliance for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

*4.2.2.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations.

*4.2.3 Examination of end item. The classification of defects found during the examination shall be in accordance with list shown in 4.2.3.1, 4.2.3.2, and 4.2.3.3. The sample unit shall be one belt.

*4.2.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Bartack	One or more missing, loose, or misplaced not serving intended purpose.		X	
Buttons (applying to all buttons)	a. Missing, loose, broken, or defective: - 1 or both buttons.		X	
	b. Type, size, or color other than specified.		X	
Buttonholes	a. One or more omitted or added.	X		
	b. Buttons and buttonholes not corresponding in size so that they do not button properly.	X		
	c. Buttonhole not securely caught in fabric, causing stitching to pull away from fabric.	X		
	d. One or more broken stitches in - 1 buttonhole. - both buttonholes.	 X	X	
	e. More than 2 skipped stitches in: - one buttonhole. - both buttonholes.		 X	X
	f. One or both ends not securely tacked in: - 1 buttonhole. - both buttonholes.	 X	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	g. Poorly constructed (unless otherwise classified).		X	
	h. Ragged edges, affecting appearance.			X
	i. Wrong type, uncut buttonhole.		X	
Cleanness	a. One or more spots or stains of an obvious permanent nature.	X		
	b. One or more removable spots or stains clearly noticeable.		X	
	c. Thread ends not trimmed or loose threads not removed on major portion of belt.			X
Components and assembly (unless otherwise classfied herein)	a. Any defective component.	X		
	b. Any component part omitted.	X		
	c. Any required operation omitted or improperly performed.	X		
Cutting	a. Any component part of wool material not cut in accordance with directional lines on patterns or specification requirements.	X		
	b. Any lining part not cut in accordance with directional lines on patterns or specification requirements.		X	
	c. Belt wool part spliced, i.e., cut in two or more parts.	X		
Identification and size marking	a. Size marking omitted, illegible or incorrect.	X		
	b. Information other than size marking missing, incorrect or illegible.		X	
	c. Misplaced, i.e., placed on the wool material.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	d. Size shown on item (identification marking) not in conformance with size shown on intermediate or outer container as applicable.			X
Material defects and damages	a. Any hole.	X		
	b. Any weakening defect such as smash, multiple float, loose slub, etc., that may develop into a hole.	X		
	c. Shade bar, unsightly slub, etc., - on outside.		X	
	- on lining.			X
	d. Needle chews which may develop into a hole.	X		
	e. Scissors or knife cut, tear, mend, or burn.	X		
	f. One or more exposed drill holes.	X		
	g. Ruptured fibers in the line of sewing (usually caused by broken, blunt, or hooked needle) affecting appearance.		X	

NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:

Material defect - No defect.
Workmanship damages - Minor B defect.

Pressing	a. Burned or scorched.	X		
	b. Omitted or poorly pressed, affecting appearance (unless otherwise classified).		X	
Shaded parts	Belt keeper badly shaded, affecting appearance.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching	a. Accuracy of seaming:			
	1. Seams twisted, puckered, or pleated, affecting appearance.		X	
	2. Part of belt caught in any unrelated operation or stitching.		X	
	3. Stitching overlapping end(s) of thread break less than 1/2 inch.			X
	4. Ends of seams or stitchings when not caught in other seams or stitchings back-tacked less than 1/4 inch (301 stitch type).		X	
	5. Wrong shade of thread or 2 shades of thread used on outside of belt or belt keeper.		X	
	b. Gage of stitching (edge or top stitching):			
	1. Irregular, i.e., unevenly gaged, affecting appearance (to be scored only when the condition exists on major portion of seam).		X	
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seams Any seam open:			
	- more than 1 inch.	X		
	- more than 1/4 inch but not more than 1 inch.		X	
	- 1/8 inch or more but not more than 1/4 inch.			X

NOTE: One or more broken or two or more continuous skipped or run-off switches constitutes an open seam.

	d. Raw edges Any raw edge:			
	- more than 1 inch.	X		
	- 1/4 inch or more but not more than 1 inch.		X	
	- 1/8 inch or more but not more than 1/4 inch.			X

NOTE: Raw edges not securely caught in stitching shall be classified as an open seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	e. Run-offs (see classification of open seams)			
	f. Seam and stitch type: wrong seam or stitch type.		X	
	g. Stitch tension:			
	1. Loose tension, resulting in a loose seam.	X		
	2. Loose tension on edge stitching resulting in loosely exposed bobbin thread or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		

NOTE: Puckering is evidence of tight tension; when puckering is evident, the inspector shall test seam by exerting pull in the lengthwise direction of seam.

	h. Stitches per inch (to be scored when condition exists on major portion of seam) less than minimum specified:			
	- one or two stitches.			X
	- three stitches.		X	
	- four or more stitches.	X		
	i. Stitches skipped or broken on overedge stitching (see classification of open seams).			
Size ticket	Missing, incorrect, or illegible.	X		

*4.2.3.2 Detailed defects. Detailed defects shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Belt	a. Construction:			
	1. Interlining omitted.	X		
	2. Spliced.	X		
	3. Lining exposed beyond finished edges of belt, affecting appearance.			X
	4. Pointed end poorly shaped, affecting appearance.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	5. Interlining or lining short, tight, or twisted, causing fullness or twists outside of belt, affecting appearance.		X	
	6. Finished width of belt: - more than 1-13/16 inches.			X
	- less than 1-5/8 inches.		X	
	7. Irregular in width by more than 3/16 inch, affecting appearance.		X	
	8. Excessive fullness or pleats on lining not affecting smoothness outside of belt.			X
	b. Belt keeper:			
	1. Omitted.	X		
	2. Belt keeper short (constricting belt).		X	
	3. Belt keeper finished less than 3/8 inch or more than 5/8 inch wide.			X
	4. Length of belt keeper measured from bartack to folded end:			
	- less than 2 inches but not constricting belt or more than 2-1/4 inches long.			X
	5. Ends of keeper not securely bartacked.		X	
	6. Set with covering stitch on outside.		X	
	c. Belt fastener:			
	1. Omitted.		X	
	2. Finished width of fastener less than 1/2 inch or more than 5/8 inch.			X
	3. Length of finished fastener less than 4-1/4 inches or more than 4-3/4 inches.		X	
	4. Buttonhole end of fastener turned under less than 1-1/2 inches.			X
	5. Buttonhole not made through turned under portion of fastener.		X	
	6. Raw end of fastener not turned under or not bartacked through all plies of belt.		X	
	7. Fastener not securely bartacked to belt.		X	
	8. Bartack poorly constructed having an objectionable appearance on the outside of belt.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major A	Minor B
	9. Bartack not extending across the full width of fastener.		X
	d. Belt fastener button and buttonhole (position).		
	1. Button stitched through outside surface of belt.		X
	2. Button and buttonhole out of alignment causing puckering or twist on outside of belt when buttoned, affecting appearance.	X	
	3. Purling of buttonhole not finishing on the outside of fastener.		X
	e. Button and buttonhole at square end of belt (position):		
	1. Center of buttonhole less than 7/8 inch or more than 1-1/8 inch from square end of belt.		X
	2. Buttonhole off center with width of belt by 1/4 inch or more.	X	
	3. Button less than 3-1/2 inches or more than 3-3/4 inches from square end of belt.		X
	4. Button not stitched through all plies of belt.	X	
	5. Button misplaced causing turnback to be exposed beyond edges of belt when buttoned.		X
	f. Snap fasteners (type III Belts)		
	1. Any missing, loose, broken, defective or mismatched.	X	
	2. Tacking stitches omitted or insecure on one or more handsewn fasteners.		X
	3. Center of stud part placed less than 3-1/2 inches or more than 3-3/4 inches from folded end of belt.	X	
	4. Center of socket placed less than 1/2 inch or more than 5/8 inch from point.	X	
	5. Not aligned, causing a noticeable bulge or twist on belt when fastened, affecting appearance.	X	
	6. Stitching of socket showing on outside of belt.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

*4.2.3.3 Finished measurements. Any measurement deviating from the nominal dimension and tolerance specified in Table II shall be classified as a size measurement defect.

*4.2.3.4 Inspection levels and acceptable quality levels. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

	AQL	Inspection level
4.2.3.1 and 4.2.3.2.		III of MIL-STD-105
Major	1.5 DHU	
Major, Minor A and Minor B	6.5 DHU	
Total Major, Minor A and Minor B (combined)	15.0 DHU	
4.2.3.3		
One class	4.0 DHU	S-3

* 4.2.4 Examination of preparation for delivery. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged, selected just prior to the closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of belts per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

* 5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

* 5.1.1 Level A. Each belt shall be folded in half and then folded in half again. The size marking shall be visible when each belt is folded. The folded belts shall be stacked and tied into bundles approximately 1-inch from each end with strong twine or cotton tape. Each bundle shall contain 10 belts of one type and size only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Belts shall be packaged in accordance with manufacturer's normal practice.

*5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A

*5.2.1.1 Method 1. One-hundred fifty (150) belts of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner, conforming to class-weather resistant, size No. 1A of MIL-B-17757. Not less than 8 ounces of napthalene flakes, (see 6.4), shall be uniformly distributed throughout the contents of each shipping container. In addition, each container shall have the contents completely covered on top and bottom with a sheet of 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled, closed, and reinforced as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers, 1,800 belts of one type and size only, shall be overpacked in a fiberboard shipping container conforming to class-weather resistant, size No. 4 of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.2 Level B. One-hundred fifty (150) belts of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to class-domestic, size No. 1A of MIL-B-17757. The fiberboard used in fabricating the box shall be grade 275. Not less than 8 ounces of napthalene flakes or equal (see 6.4) shall be uniformly distributed throughout the contents of each container. In addition, the contents of each container shall be completely covered on top and bottom with a sheet of 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled and closed as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.3 Level C. Belts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

*5.3 Marking. In addition to any special marking required by the contract or order, the shipping container shall be marked in accordance with the requirements of MIL-STD-129.

*5.3.1 Mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white label with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

6. NOTES

*6.1 Intended use. The belts described herein are intended for wear with the following coats:

Type I Belt. Coat, Man's: Wool, Gabardine; Blue; (With Belt)
Type II Belt. Coat, Man's: Wool, Serge, Green; (With Belt)
Type III Belt. Coat, Man's: Polyester/Wool, Green; (With Belt)

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

*6.2.1 Procurement requirements:

(a) Title, number, and date of this specification.
(b) Type and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Levels of packaging and packing required (see 5.1 and 5.2).
(e) When level A, method 2, packing is required (see 5.2.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

*6.3 Samples and shade samples. For information regarding the availability of samples of belts and the standard shades specified, address inquiry to the procuring activity issuing the Invitation for Bids.


*6.4 Moth repellent requirement. The moth repellent requirement (see 5.2.1 and 5.2.2) is not applicable when belts are made of moth repellent cloth.

*6.5 First article. Examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.6 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project number 8405-N433

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

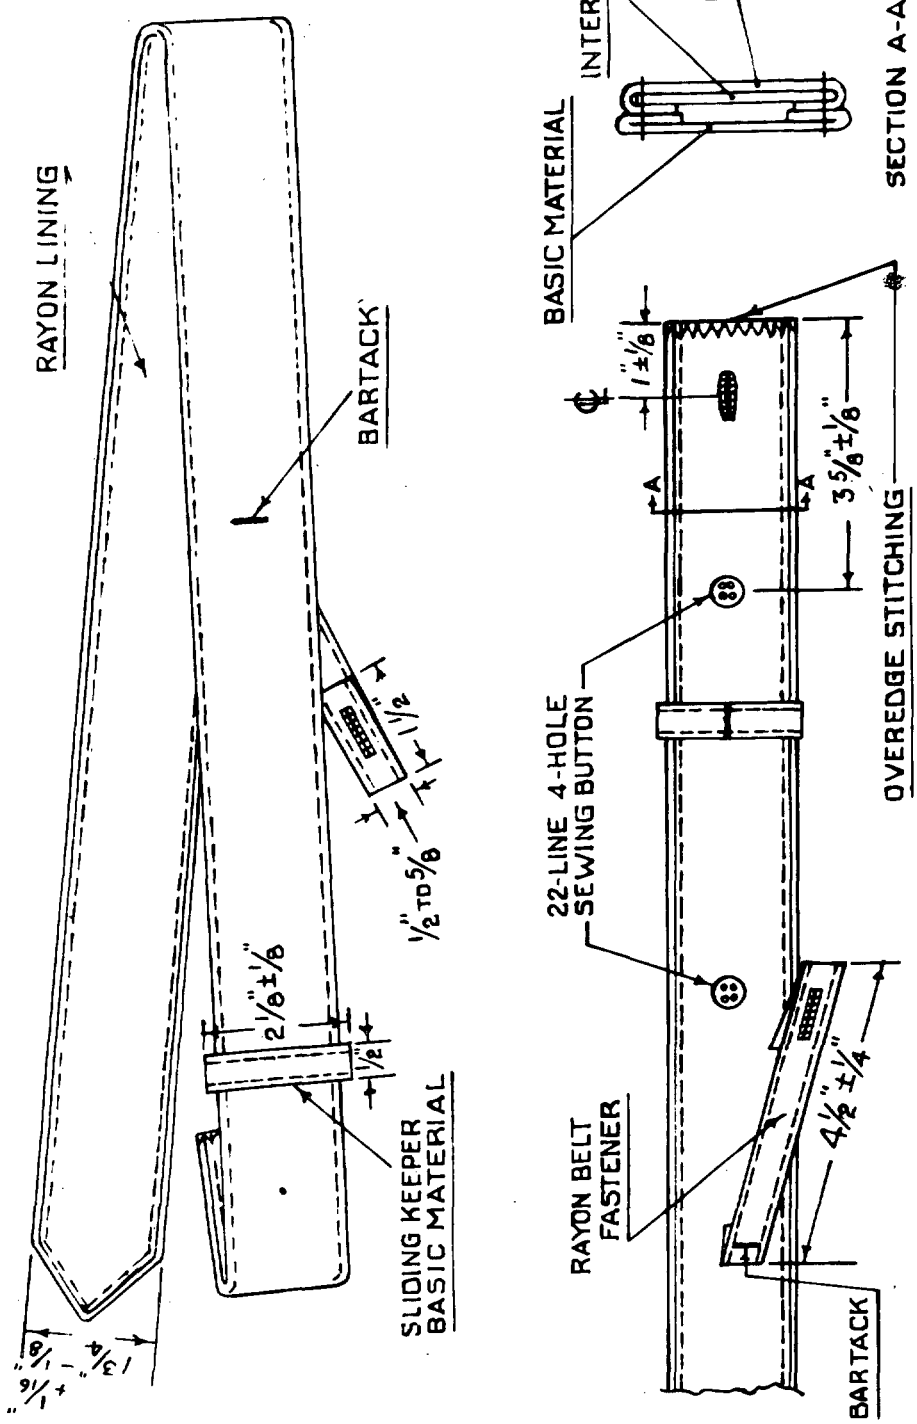

BELT DETAIL

FIGURE 1. BELTS, COAT, MAN'S: WOOL, TYPE I & TYPE II

M.C.S.A. 826:R.G.F. 6 Nov '70

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

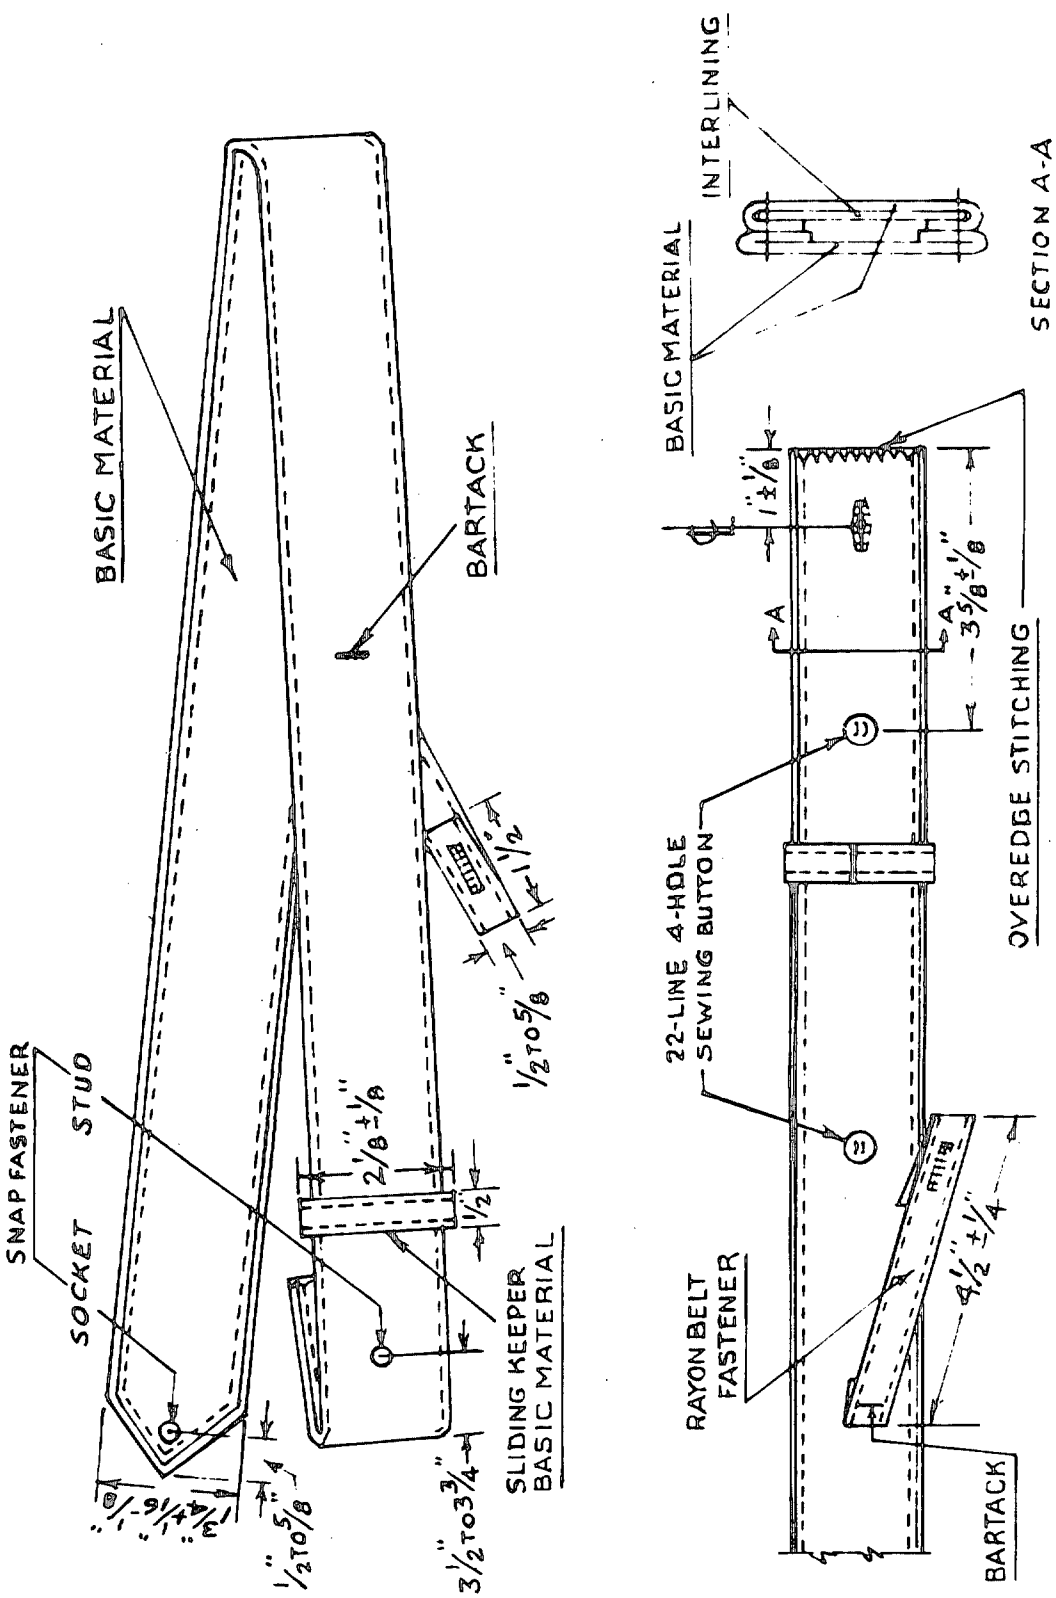


FIGURE 2. BELT, COAT, MANS; POLYESTER/WOOL, GREEN (TYPE III)

M.C.S.A.
826: R.B.
6 Nov '70

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD, FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.