MIL-B-17693E(MC)
13 February 1986
SUPERSEDING
MIL-B-17693D(MC)
6 November 1970

MILITARY SPECIFICATION

BELTS, COAT, MAN'S: WOOL; POLYESTER/WOOL

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for wool serge and polyester/wool belts.

1.2 Classification. The belts shall be of the following types and sizes as specified (see 6.2).

Type I - Deleted (see 6.5)
Type II - Wool, Serge; Green shade 2243
Type III - Polyester/Wool; Green shade 2241

Schedule of sizes

30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 48

NOTE: Belt sizes correspond to sizes of coats with which the belts are worn.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps, Headquarters, U. S. Marine Corps (LMA-1), Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-T-276	- Thread, Cotton
V-T-301	- Thread, Silk
UU-P-268	- Paper Kraft, Wrapping
CCC-C-438	- Cloth, Buckram, Woven and Nonwoven
DDD-L-20	- Label: For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-823	- Cloth, Serge, Wool; Wool and Nylon; Polyester and Wool
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables For Inspection By attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1490	- Provisions for Evaluating Quality of Coats, Men's, Dress

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza; Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20026.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Standard sample. A standard sample is furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a finished belt of each type being procured, shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all applicable provisions of the specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

3.3 Material.

3.3.1 Basic material. The basic material for each type belt shall be as follows:

a. Type II. Cloth, wool, serge, green shade 2234 (see 6.3), 15-ounce, conforming to type I, class 5 of MIL-C-823.

b. Type III. Cloth, polyester/wool, green shade 2241, (see 6.3), conforming to type III of MIL-C-21115.

3.3.2 Lining. Material for lining the type II belts and for the belt fastener for types II and III belts shall be cloth, rayon, twill, 3.7-ounce, conforming to class I of MIL-C-368, and shall be green, shade 2208.

3.3.3 Belt interlining. Material for interlining the belts shall be cloth, buckram, cotton, natural color, conforming to type I, class 2, of CCC-C-438.

3.3.4 Thread.

3.3.4.1 Silk thread. Silk thread shall conform to V-T-301. The thread shall conform to type I, size A, 3-ply. The requirements for extractable material shall not apply.

3.3.4.2 Cotton thread. Cotton thread shall conform to V-T-276, type IC2, mercerized finish, ticket No. A, 3-ply, for inside seaming and stitching, buttonholes, and sewing on snap fasteners, and type IB3, glazed finish, ticket No. 24, 4-ply for sewing on buttons.

3.3.4.3 Color and colorfastness. Cotton and silk thread shall be dyed shade T-1, Cable No. 66023. The dyed thread shall show fastness to light and wet (dry) cleaning equal to or better than the standard sample. When no standard is available, the dyed thread shall show good fastness to light and wet (dry) cleaning and in addition, the silk thread shall show good fastness to light when tested as specified in thread specification.

3.3.5 Indentification and size marking (combined) labels. Combination identification and size marking shall be applied to each belt by heat transfer (decalcomania), direct printing or stamping conforming to type III or type IV, class 4 of DDD-L-20, except the marking medium shall be of a contrasting color to the lining material. The belts are intended to be dry cleaned and the marking shall show fastness to dry cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

3.3.6 Buttons. Sewing hole buttons shall be melamine formaldehyde composition, glossy finish, conforming to type II, class D, style 4, 22-line of V-B-871. The color of the buttons shall be green, Cable No. 62017.

3.3.7 Fastener, snap. Snap fasteners for type III belts shall be brass, black japanned finish, round or square style, rolled edge, size 1/0, sew-on type.

3.4 Design. The belts shall be the U.S. Marine Corps design shown in Figures 1 and 2, having one end pointed on a 45-degree angle and the other end square to button over a removable buckle and provided with a sliding keeper of basic material and with a rayon belt fastener to button on the lining or under side as applicable for securing belt to coat.

3.5 Patterns. Standard patterns for the belt will be furnished to the supplier by the Government. The standard pattern shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The supplier's working pattern shall be identical to the standard pattern. The standard pattern shows size and marks for placement of buttons and belt fastener.

3.5.1 List of pattern parts. Belts shall be cut from the materials specified herein in accordance with the number of pattern parts indicated below:

	Pattern Parts	
Materials	Pattern nomenclature	No. of cut parts
Cloth, Wool Serge	Belt	1
or Cloth, Polyester/Wool	Belt(top ply) Belt (under ply)	1

3.6 Construction. The belts shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I. The supplier is not required to follow the exact sequence of the operations as listed in Table I, but all operations specified shall be used to manufacture the belts.

3.6.1 Stitches, seams and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. All overedge stitching shall be done on serging machines with a knife attachment properly set to trim the raveled edge without cutting the material. Ends of seam and stitching produced with 301 type stitch, when not caught in the other seams or stitching, shall be securely backtacked not less that 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the belts in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by the directional lines on the pattern. c. Cut all wool parts of the belt from one piece of basic material, except the following parts may be cut from ends, but when so cut, the parts shall harmonize with the shade of the belt: belt keeper and under ply of type III belt. Belt keeper may be banded 1 inch wide and under ply of type III belt may be cut from a banding machine 2-1/4 inches wide. d. The rayon lining shall be cut 2-1/4 inches wide for type II belts and the belt fastener for each type of belt shall be cut 1-5/8 inches wide. e. Cut the cotton buckram interlining material for the belts on the straight 1-5/8 inches wide.					
2.	Replacement of damaged parts. a. Replace, at time of cutting, all parts containing damages, such as holes or serious weakening defects such as smashes, multiple floats and slubs likely to develop into holes. b. Replace all parts damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cuts, tears, holes, mends and burns.					
3.	Make belt keeper. Finished appearance. The belt					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3.	Make belt keeper. (cont'd)					
	keeper shall be uniformly stitched, uniform in width and shall finish smooth and flat without pleats, gathers, puckers or other distortion.					
	a. The belt keeper shall be made from a 1-inch wide strip of basic material.					
	b. Fold the sides of the strip lengthwise towards the center, abutting the raw edges, and join the raw edges together with a covering stitch, to finish 1/2 inch wide. The stitching shall be uniformly 1/8 inch from finished edges of the keeper.	406	EFh-1	12-16	A	A
	c. Cut the keeper 4-1/2 inches long, fold in half end to end, and join the ends with a bartack across the width of the keeper. The finished keeper shall measure 2-1/8 $\pm$ 1/8 inches from bartack to folded end.	Bar-tack		28 per bar-tack (mini-mum)	A	A
4.	Make belt fastener.					
	Finished appearance. The belt fastener shall be uniformly stitched, uniform in width and shall finish smooth and flat without pleats, gathers, puckers or other distortion. The buttonhole shall be clean cut, well made and correctly positioned. The buttonhole shall be the straight type and shall be made to fit a 22-line sewing hole button. The purling of the buttonhole shall be on the outside of the fastener and the ends of the buttonhole securely tacked.					
	a. The belt fastener shall be made from 1-5/8-inch-wide strip of rayon lining material.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
	b. Fold the strip in half lengthwise, turn in raw edges, and stitch 1/8 inch from each side, catching the turned edges in the stitching, to form a 1/2 to 5/8 inch wide band. Cut the fastener 6-1/2 inches long.	301	EFp-2	12-16	A	A
	c. Turn under one end of the fastener 1-1/2 inches and make a horizontal straight type buttonhole, cut 5/8 inches long, through the center of the turned under portion, securely tacking each end of buttonhole.	Button hole		42-68	A	A
5.	Seam belt (type II.)					
	Finished appearance. The belts shall be uniformly stitched and shall finish smooth and flat without twists, pleats, gathers, puckers, or raw edges. The stitching shall be uniformly 1/8 inch from the finished edges of the belt. The lining shall be 1/16 inch back from the finished edge of the belt.					
	a. The belts shall be made of one ply of basic material, lined with rayon twill and interlined with resin finish cotton buckram material.					
	b. Place the interlining material between the basic and lining materials and seam together uniformly 1/8 inch from upper and lower edges, with the raw side edges of lining and basic materials turned in and caught in the stitching. The stitching shall extend from one end of belt to approximately 1-1/4 inches from the opposite end.	301	SSc-1	12-16	A (silk)	A (silk)

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6.	Seam belt (type III).					
	Finished appearance. The belt shall be uniformly stitched and shall finish smooth and flat without twists, pleats, gathers, puckers, or raw edges. The stitching shall be uniformly 1/8 inch from the finished edge of the belt.					
	a. The belt shall consist of a top and underply of basic material interlined with a single ply of resin finish cotton buckram material.					
	b. Place the interlining between the top and under ply components. Turn in the side edges of top and under ply component and seam all plies together 1/8 inch from the folded edges of the top ply catching the turned in portions in the stitching. The stitching shall extend from one end of the belt to approximately 1-1/4 inches from the opposite end.	301	SSc-1	12-16	A (silk)	A (silk)
7.	Close ends of belt (type II).					
	Finished appearance. The pointed end of the belt shall be well formed with the turned-in edges securely caught in the stitching.					
	a. Turn back the lining and basic materials at the top and bottom unseamed edges of the belt and trim the interlining approximately 1-1/4 inches back from the end.					
	b. Fold the end of the basic material in half lengthwise to the outside, and stitch across the width of the basic material 1/8 inch from the end.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Close ends of belt (type II).					
	c. Turn the end of the belt, working out the point with the seams open. Turn under the upper and lower edges of the lining and seam the lining to the belt 1/8 inch from the folded edges of the belt, closing the end and forming a point at the center of the finished end.	301	SSc-1	12-16	A (silk)	A silk)
	d. Close the opposite end of the belt with overedge stitching.	502 or 503	EFd-1	10-14	A	A
			EFd-1	10-14	A	A
	e. The finished width of the belt shall be 1-3/4 inches (+1/16 - 1/8 inch). The finished length of the belt for each size coat shall be as shown in Table II.					
8.	Close ends of belt (type III).					
	Finished appearance. The pointed end of the belt shall be well formed with the turned-in edges securely caught in the stitching.					
	a. Turn back the under and top ply of basic material at the top and bottom unseamed edges of the belt and trim the interlining approximately 1 inch back from the end.					
	b. Fold the top and under ply of the unseamed end of the belt in half lengthwise face to face, and stitch each ply respectively 1/8 inch from the end.	301	SSa-1	12-16	A	A
	c. Turn the ends of the top and under ply, working out the points with the seams open. Position the two points even and stitch together 1/8 inch from folded and turned edges, closing the ends, forming a point at the center of the finished end.	301	SSc-1	12-16	A (silk)	A (silk)
	d. Close the opposite end of the belt with overedge stitching.	502 or 503	EFd-1	10-14	A	A
			EFd-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8.	Close ends of belt (type III). (cont'd) e. The finished width of the belt shall be 1-3/4 inches +1/16, -1/8 inch. The finished length of the belt for each size coat shall be as shown in Table II.					
9.	Make buttonhole in belt. Finished appearance. The buttonhole shall be clean cut, well made and correctly positioned. The buttonhole shall be the straight type and shall be made to fit a 22-line sewing hole button. The purling of the buttonhole shall be on the outside of the belt and the ends of the buttonhole shall be securely tacked. a. Make a horizontal, straight type buttonhole, cut 5/8 inch long, midway between upper and lower finished edges of the belt, with the center of the buttonhole 1 ± 1/8 inch from the overedge stitched end and with the ends of buttonhole securely tacked.	But-ton		50 per button-hole (minimum (includ-ing tack	A	A
10.	Sew on belt buttons. Finished appearance. The buttons shall be positioned and securely sewn to the belt with the end of the stitching securely tacked. a. Mark the location for sewing two 22-line sewing hole buttons to lining side of type II belts and underside of type III belts. The center of the button for the buckle end shall be 3-5/8 ± 1/8 inches from the overedge stitched end of belt. The button for the belt fastener shall be positioned in accordance with mark on pattern for each size belt.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10.	Sew on belt buttons. (Cont'd)					
	b. Securely sew on button at each mark to properly engage buttonhole in buckle end of belt, and buttonhole in belt fastener. The belt fastener button for type II belts shall be sewn through the underside and interlining only.	101 or Hand		21 per button (minimum) 3-4 (double thread)	24/4	
11.	Bartack fastener to belt.					
	Finished appearance. The belt fastener shall be smooth and flat without twisting or bulging when buttoned. The bartack shall extend across the entire width of the fastener and shall be finely stitched in order not to have an objectionable appearance on the outside of belt.					
	a. Mark location for sewing belt fastener to lining side of type II belts and underside of type III belts in accordance with mark on pattern for each size belt.					
	b. Turn under the raw end of the fastener 1/2 inch and bartack the fastener to the belt through all plies 1/8 to 3/16 inch from the folded edge.	Bar-tack		28 per bartack (minimum)	A (silk)	A (silk)
12.	Mark belt.					
	a. Mark the size and stock number (see 3.3.5) on the lining side or underside as applicable, of each belt at the center back.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:28Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
13.	Clean and press belt. Finished appearance. The belt and belt keeper shall be clean and well pressed with the keeper properly attached and secured to the belt. a. Trim all ends of stitching, and remove all loose ends of thread from belt. Remove all spots and stains from the belt without injury to the material. b. Place the keeper on the belt at the square end and secure by buttoning the end. Press the belt and keeper smooth and flat with a heated pressing iron or pressing machine.					
14.	Attach snap fasteners (type III belts.) Finished appearance. The snap fasteners shall be properly located and securely sewn to the belt. a. Sew the socket part of the snap fastener to the underside through the interlining only, 1/2 to 5/8 inch from the point. b. Sew the stud part of the snap fastener to the top ply through the interlining only, 3-1/2 to 3-3/4 inches from the folded end of the belt. When stud part is sewn by hand, the stitching shall be tacked off not less than two stitches.	101 or Hand 101 or Hand		21 per fastener (minimum) 3-4 (double thread) 21 per fastener (minimum) 3-4 (double thread)	A A A A	

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:28Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished belts shall conform to the measurements shown in Table II.

Table II. Finished length measurement 1/

(All Type Belts)	
Size (see 1.2)	Inches
30	33-1/2
32	34-1/2
33	35-1/2
34	36-1/2
35	37-1/2
36	38-1/2
37	39-1/2
38	40-1/2
39	41-1/2
40	42-1/2
41	43-1/2
42	44-1/2
43	45-1/2
44	46-1/2
46	48-1/2
48	50-1/2

1/ Tolerance on finished length ± 3/8 inch. Measurement taken along the center from the pointed end to overedge stitched end.

3.8 Workmanship. The finished belts shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1. Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall be-

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:28Z
Check the source to verify that this is the current version before use.

come a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. When a certificate of compliance is submitted, the Government reserves the right to check test such items and determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105 and MIL-STD-1490 except where otherwise indicated herein.

4.4 First article inspection. When first article is required, inspection and tests shall be performed to determine conformance to all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, figures and standards, testing shall be performed on components listed in Table III for characteristics noted. All test reports shall contain the individual values utilized in expressing the final results.

4.5.1.1 Sampling for testing. The unit for expressing lot size and sample unit for testing each component shall be in accordance with applicable subsidiary specifications and MIL-STD-1490 except as listed below:

Component	Lot Size expressed as	Sample unit for testing
Fastener, Snap	1,000 sets	15 complete sets

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:28Z
Check the source to verify that this is the currentversion before use.

Table III. Test methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Fastener snap	Material indentification 1/	3.3.7	Std. Comml.	1	Pass or fail
	Finish	3.3.7	Std. Comml.	1	Pass or fail
	Size and type	3.3.7	Std. Comml.	1	Pass or fail

1/ Accept a certification of compliance for this requirement.

Source: https://assist.dla.mil/ -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations.

4.5.3 End item examination. The examination of the end item shall be performed in accordance with the provisions of MIL-STD-1490.

4.5.3.1 Finished measurement examination. The provisions for the finished measurement examination of the finished belt shall be as specified in MIL-STD-1490 and as outlined in Table II.

4.6 Examination of packaging requirements. The examination for packaging, packing and marking requirements shall be as specified in MIL-STD-1490.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each belt shall be folded in half and then folded in half again. The size marking shall be visible when each belt is folded. The folded belts shall be stacked and tied into bundles approximately 1 inch from each end with strong twine or cotton tape. Each bundle shall contain 10 belts of one type and size only.

5.1.2 Commercial. Belts shall be packaged in accordance with manufacturer's normal practice.

5.2 Packing. Packing shall be level A, B or commercial, as specified (see 6.2).

5.2.1 Level A

5.2.1.1 Method 1. One-hundred fifty (150) belts of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner, conforming to class-weather resistant, size No. 1A of MIL-B-17757. Each container shall have the contents completely covered on top and bottom with a sheet of 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled, closed, and reinforced as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers, 1,800 belts of one type and size only, shall be overpacked in a fiberboard shipping container conforming to class-weather resistant, size No. 4 of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. One-hundred fifty (150) belts of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to class-domestic, size No. 1A of MIL-B-17757. The fiberboard used in fabricating the box shall be grade 275. The contents of each container shall be completely covered on top and bottom with a sheet of 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled and closed as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Commercial. Belts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rule and U.S. Postal Service Manual or regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping container shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white label with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

5.4 Palletization. When specified (see 6.2), belts packed as specified in 5.2 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K or L or film bonding means O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The belts described herein are intended for wear with the following coats:

Type II Belt. Coat, Man's: Wool, Serge, Green; (With Belt)

Type III Belt. Coat, Man's: Polyester/Wool, Green; (With Belt)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Levels of packaging and packing required (see 5.1 and 5.2).
(e) When level A, method 2, packing is required (see 5.2.1.2).
(f) When palletization is required (see 5.4).

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs:

	Paragraph No.	Data Requirements	Applicable DID No.
(a)	4.	Inspection System Program Plan	DI-R-4803
(b)	4.4	First Article Inspection Procedures	DI-T-4901
(c)	4.4	First Article Inspection Procedures	DI-T-4902
(d)	4.5	Production/Acceptance	DI-T-4903
(e)	4.5	Production Inspection Report	DI-T-4904

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Standard sample. For information regarding the availability of the standard sample, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. Examinations, tests and approval shall be as specified by the contracting officer.

6.5 Type I belts. Type I belts are no longer used by the Marine Corps.

6.6 Figures. Figures 1 and 2 show general design of the belts and are furnished for information only. In the event of conflict between these figures and text of this specification, the text of this specification shall govern.

Source: https://assist.dla.mil Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.


6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing Activity

Navy - MC

Project No. 8405 - N986


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

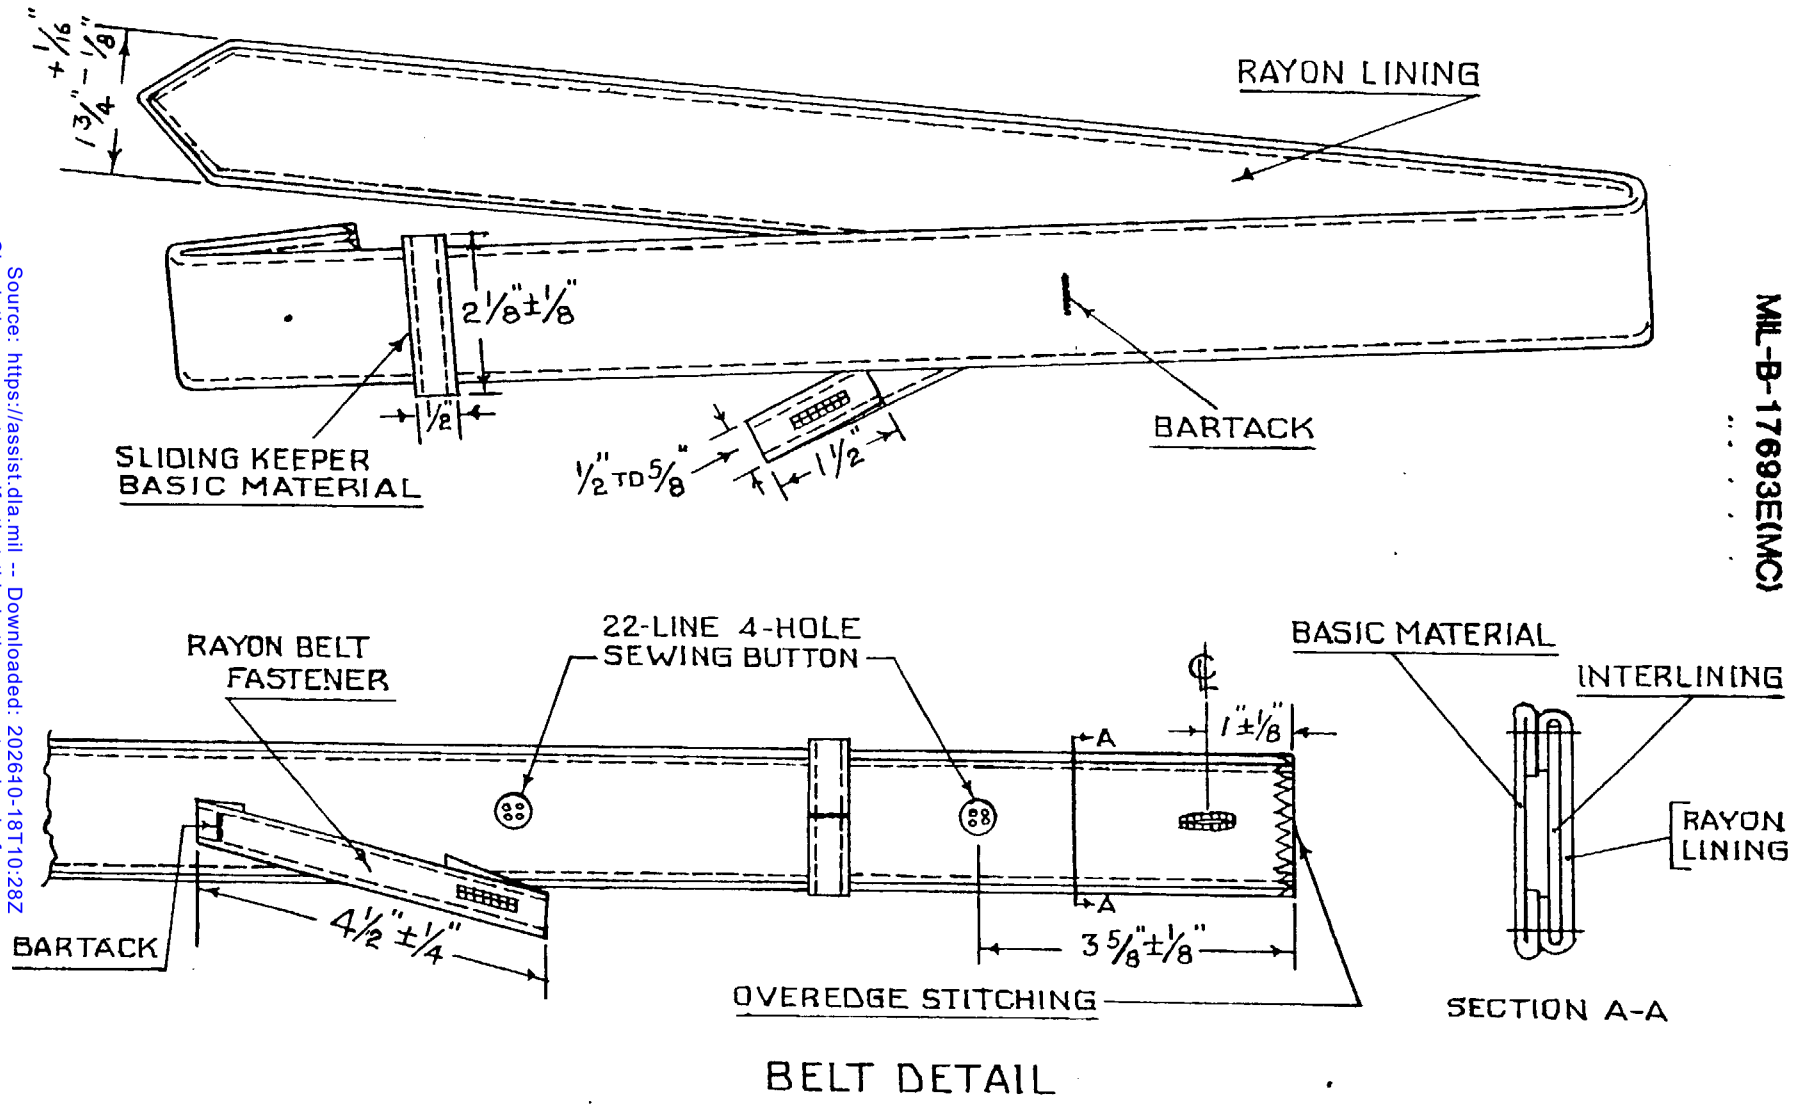

BELT DETAIL

FIGURE 1. BELTS, COAT, MAN'S: WOOL, TYPE II

Source: https://assist.dla.mil -- Downloaded: 2026-01-18T10:28Z
Check the source to verify that this is the current version before use.

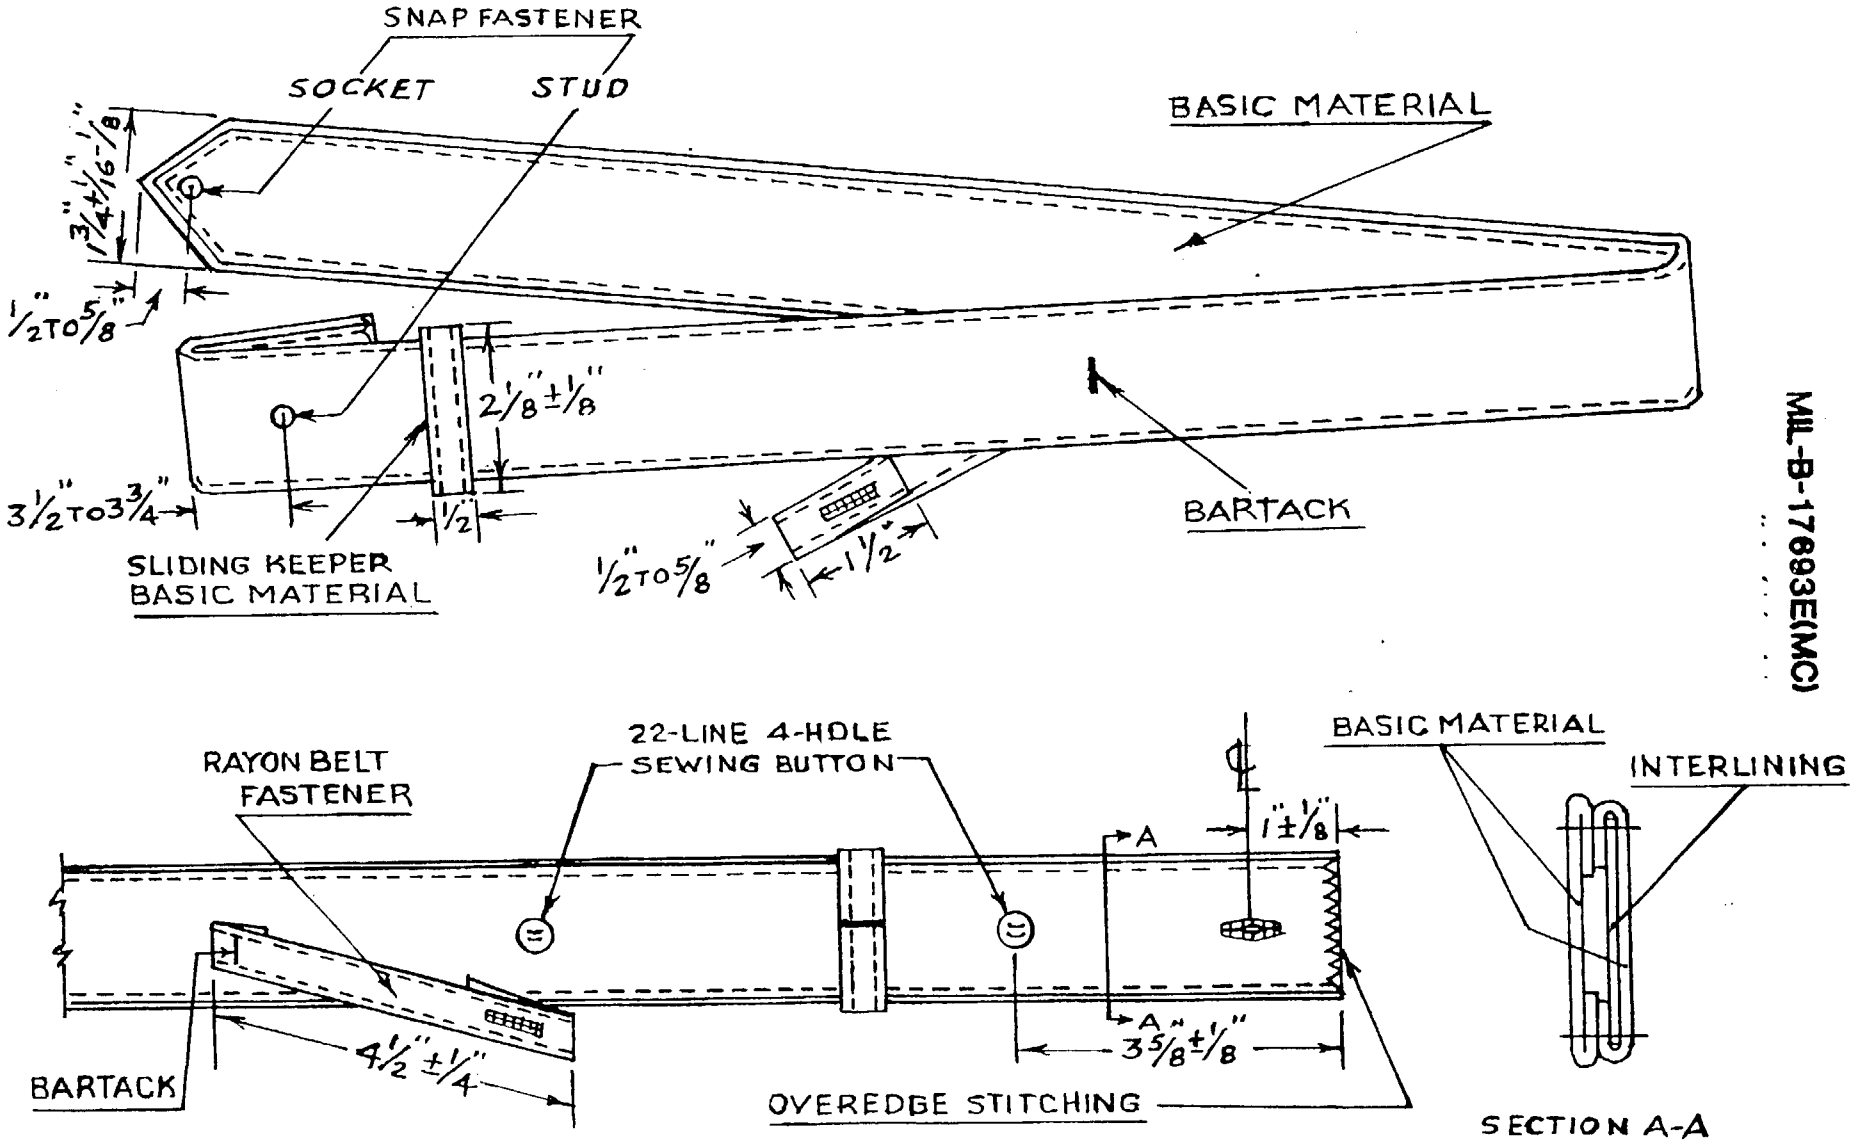

BELT DETAIL

FIGURE 2. BELT, COAT, MANS; POLYESTER/WOOL, GREEN (TYPE III)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-B-17693E(MC)	BELTS, COAT, MAN'S: WOOL: POLYESTER/WOOL

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:28Z
Check the source to verify that this is the currentversion beforb use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commandant of the Marine Corps
Headquarters, U. S. Marine Corps
Attn: Code LMA-1
Washington, D. C. 20380

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:28Z
Check the source to verify that this is the current version before use.