MIL-C-17774A(MC)
7 July 1964
SUPERSEDING
MIL-C-17774(MC)
2 October 1953

MILITARY SPECIFICATION

COVER, BAYONET SCABBARD; COTTON DUCK; WHITE

(WITH LEATHER TIP)

1. SCOPE

1.1 Scope. - This specification covers a bayonet scabbard cover fabricated of white cotton duck with a black leather tip.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

L-P-378	-	Plastic Film (Polyethylene Thin Gage)
V-T-276	-	Thread, Cotton
KK-L-154	-	Leather, Cattlehide, (Bag and Case)
CCC-C-419	-	Cloth, Cotton, Duck, Unbleached, Plied Yarns (Army And Numbered)
CCC-D-950	-	Dyeing And Aftertreating Processes For Cotton Cloths
DDD-L-20	-	Label; For Clothing, Equipage, And Tentage; (General Use)

Military

MIL-B-17757	-	Boxes, Fiber, Corrugated (Modular Sizes)

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED. STD. NO. 751	-	Stitches, Seams, And Stitchings

Military

MIL-STD-105	-	Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	-	Marking For Shipment And Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

OFFICIAL CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Official Classification Committee, 202 Chicago Union Station, Chicago 6, Illinois.)

3. REQUIREMENTS

3.1 Samples. - Samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.1.2 Preproduction sample approval. - Unless otherwise specified, before production is commenced, a sample of the cover shall be submitted to the contracting officer for approval (see 6.2).

3.2 Materials

3.2.1 Cloth, cotton, duck. - The cloth, before bleaching, shall be No. 8 hard texture, conforming to type I of CCC-C-419.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

3.2.1.1 Color. - The cotton duck shall be bleached white, conforming to type V, class C of CCC-D-950.

3.2.2 Leather. - The leather shall be smooth finish, untreated, 3/64 to 4/64 inch thickness, conforming to type I, class 2, selection A of KK-L-154. The color shall be black shade 111 (see 6.3).

3.2.3 Thread. - The thread shall be cotton, glazed finish, conforming to V-T-276 and the following:

Operation	Type	Ticket No. and Ply	
Cotton duck:		Needle	Bobbin or looper
Seaming and stitching except serge stitching	IB2	16, 4-ply	20, 4-ply
Serge stitching	IB2	20, 4-ply	20, 4-ply
Leather:			
Seaming and stitching	IB3	16, 4-ply	16, 4-ply

3.2.3.1 Color and colorfastness. - The thread shall be white (bleached) for seaming and stitching the cotton duck; and black for seaming and stitching the leather. The colored thread shall show good fastness to laundering and light when tested as specified in V-T-276.

3.3 Marking. - The identification marking shall conform to type IV, class 5 of DDD-L-20.

3.4 Design. - The scabbard cover shall be the U. S. Marine Corps design shown in Figure 1.

3.5 Patterns. - Standard patterns will be furnished to the contractor by the Government and shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. Standard patterns are marked and notched for proper cutting, placement, and assembly of component parts.

3.5.1 List of pattern parts. - Cover, bayonet scabbard shall be cut from the specified materials in accordance with the pattern parts indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

Item	Pattern nomenclature	No. of cut parts
	Material: Basic	
1.	Body piece	1
2.	Belt attachment	1
	Material: Leather	
3.	Leather tip	1
	Marker	
4.	Boxstitch marker	

3.6 Construction

3.6.1 Cutting. - Scabbard covers shall be cut in strict accordance with the patterns furnished. The body piece shall be cut with the top end on the selvage.

3.6.2 Stitches, seams, and stitching. - The stitch, seam, and stitching types specified herein shall conform to FED. STD. NO. 751. Stitch type 301, 6 to 8 stitches per inch, shall be used for all operations, except serge stitching which shall be stitch type 504 or 505, 6 to 8 stitches per inch.

3.6.2.1 Thread tension. - Thread tension shall be maintained properly, so that there will be no loose stitching and that the lock will be embedded in the center of the materials sewed.

3.6.2.2 Tacking and backstitching. - All ends of seams shall be securely backtacked not less than 1 inch, except where ends are turned under in a hem or held down by other stitching. Thread breaks in stitching shall be secured by stitching back of break not less than one inch.

3.6.3 Manufacturing operations. - The scabbard covers shall be made in accordance with the operations as follows. The contractor is not required to follow the exact sequence of the operations as listed, but all operations shall be used to manufacture the covers.

3.6.3.1 Make belt attachment. - The belt attachment shall be a single piece of the cotton duck folded end to end to form a loop for insertion of the belt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

a. Serge stitch raw side edges - stitching type EFd-1.

b. Turn under the serge stitched edges 3/8 to 1/2 inch and stitch not more than 1/8 inch from folded edges - stitching type EFa-1.

c. Turn under one end 1/4 to 3/8 inch and stitch not more than 1/8 inch from folded edge - stitching type EFa-1.

d. Mark the identification information on inside of belt attachment. The markings shall not penetrate the cloth to outside of attachment.

3.6.3.2 Join belt attachment to body piece. - The body of the scabbard cover shall be a single piece of the cotton duck folded in half lengthwise with raw side edges turned in and seamed, as indicated in 3.6.3.4.

a. Fold the attachment widthwise with raw ends abutting. Position the attachment on the body piece at top (selvage) end in accordance with marks as indicated on pattern.

b. Box stitch the attachment to the body piece with the line of stitches not more than 3/16 inch from top (selvage) edge of body and from the finished folded edges at sides and bottom end of the attachment, and with a second row of stitches not more than 1/32 inch from the outer row.

c. Cross stich the attachment to the body piece with diagonal rows of stitching running from corner to corner of box stitching (see Figure 1).

3.6.3.3 Join leather tip to body piece. - The bottom end of the scabbard cover shall be made of a single piece of the leather seamed to the raw bottom end of the body piece. All cut edges of the leather tip shall be finished a black color to closely match the shade of the leather.

a. Lap the leather tip not less than 1/2 inch on raw bottom end of body. Seam the tip and body piece together with two rows of stitches 1/4 inch gauge and 1/16 to 3/32 inch from top edge of tip - seam type LSa-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

3.6.3.4 Close cover and tip

a. Fold the body piece and tip in half lengthwise. Turn in the raw edges of the duck and 1/2 inch wide extension at top of the leather tip not less than 3/8 inch and seam the duck not more than 1/8 inch from the folded edges - seam type SSc-1.

b. Seam the raw and turned edges of the leather tip not more than 1/8 inch from the edges - seam type SSa-1 (raw edges) and seam type SSc-1 (turned edges).

3.7 Finished measurements. - The finished scabbard covers shall conform to the measurements shown in Figure 1.

3.8 Workmanship. - The finished scabbard covers shall be clean, with all ends of thread trimmed and removed and all spots and stains removed. The covers shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. - When required, inspection of the preproduction sample shall be made of a completely fabricated cover scabbard for all provisions of this specification applicable to the end product.

4.3 Inspection for acceptance. - Unless otherwise specified, inspection shall be in accordance with MIL-STD-105.

4.3.1 Component testing. - The quality assurance provisions for components and materials, except as otherwise required by this specification, shall be in accordance with the applicable specifications and standards referenced herein. Where there is a conflict in quality assurance provisions, this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

4.3.2 In-process inspection. - Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance.

4.3.3 Examination of the end item. - The classification of defects shall be in accordance with 4.3.3.1 and 4.3.3.2. The lots shall be inspected in accordance with paragraph 4.3.3.3. The sample unit for these examinations shall be one completely fabricated cover, scabbard.

4.3.3.1 Examination for visual characteristics.

EXAMINE	DEFECT	MAJOR	MINOR
Fabric	Hole, cut or tear	X	
	Fabric defect:		
	-seriously affecting serviceability or appearance	X	
	-affecting serviceability or appearance but not seriously		X
Leather	Broken grain, badly healed scar; scratch, open grub or tick mark, hole, open vein, flanky or other grain defects:		
	-seriously affecting serviceability	X	
	-affecting serviceability but not seriously		X
	Not full grain, weak or thin spot, cut or brand mark	X	
Seams and stitching			
Open seams	1/2 inch or less		X
	More than 1/2 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

4.3.3.1 Examination for visual characteristics. (cont'd)

EXAMINE	DEFECT	MAJOR	MINOR
Seams and stitching (contd)			
NOTE: A seam shall be classified as open when 1 or more stitches joining a seam are broken or when 2 or more continuous skipped stitches or run-offs occur. On double stitched seams a seam shall be considered open when either 1 or both sides of seam are open.			
Raw edges (except on leather tip and inside of cover and belt attachment pieces)	Any raw edge when securely caught in stitching NOTE: Raw edges not securely caught in stitching shall be classified as open seams.		X
Run-offs (see open seams)			
Seam and stitch type	Wrong seam or stitch type	X	
Stitch tension	Loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in excessive tightness of fabric on seams		X
Stitches per inch	One stitch less than minimum specified		X
	Two or more stitches less than minimum specified	X	
	One or more stitches in excess of maximum specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

4.3.3.1 Examination for visual characteristics. (cont'd)

EXAMINE	DEFECT	MAJOR	MINOR
Seams and stitching (contd)			
NOTE: Variation in the number of stitches per inch caused by the operator's speeding up the machine and pulling the fabric in order to sew over heavy seams, heavy places or in turning corners, shall be classified as follows:			
	a. Within the major defect classification - Minor defect		
	b. Within the minor defect classification - No defect		
Stitching margins	Not as specified		X
Stitching gage	Not as specified		X
Stitching ends	Not backstitched	X	
	Backstitched less than 1 inch		X
Thread breaks	Backstitched less than 1 inch		X
NOTE: Thread breaks not backstitched shall be classified as open seams.			
Components and assembly	Edges of closing seam uneven: -seriously affecting appearance	X	
	-affecting appearance but not seriously		X
	Any required component or part of cover omitted	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

4.3.3.1 Examination for visual characteristics. (cont'd)

EXAMINE	DEFECT	MAJOR	MINOR
Components and assembly (cont'd)	Any row of required stitching omitted or not as specified:		
	-seriously affecting serviceability or appearance	X	
	-affecting serviceability or appearance but not seriously		X
	Needle chews expected to develop into holes	X	
	Seams badly puckered or excessively pleated		X
Construction details	Any required detail of construction omitted or not as specified:		
	-seriously affecting serviceability or appearance	X	
	-affecting serviceability or appearance but not seriously		X
	Top end of scabbard cover not selvage	X	
Cleanness	Grease or oil stains, clearly noticeable; ink stains or marking penetration to outside of felt loop	X	
	Small spots or dirt marks:		
	-seriously affecting appearance	X	
	-affecting appearance but not seriously		X
	Thread ends not trimmed throughout		X
Marking, identification	Omitted, illegible, incorrect, or size characters not as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

4.3.3.2 Examination for dimensional characteristics

Overall length and opening for belt	Not within specified tolerances
Location and component dimensions	Not within specified tolerance

4.3.3.3 General inspection level, special inspection level, and acceptable quality levels. - The general and special inspection levels and AQLs (expressed in defects per hundred units) shall be as follows:

Examine	General and Special Inspection Levels	AQLs
For defects in para 4.3.3.1 Visual Characteristics	II	2.5 Major 6.5 Total
For defects in para 4.3.3.2 Dimension Characteristics	S-3	6.5 One Class

4.4 Examination of preparation for delivery. - An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lotsize shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing
	Any component damaged, affecting serviceability

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

4.4 Examination of preparation for delivery. (cont'd)

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling
	Bulging or distortion of containers
Content	Number per container is more or less than required

5. PREPARATION FOR DELIVERY

5.1 Packaging. - Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. - Each cover shall be placed in an individual polyethylene bag measuring approximately 4-1/2 inches wide by 17 inches long with a one inch lip at the open end along the 4-1/2 inch dimension. The polyethylene flexible film shall be 0.0015 inch thick, conforming to type I, grade A, B, or C, finish 1 of L-P-378. All seams shall be effected by heat sealing; and the open end shall be folded over when the bagged cover is placed in the shipping container.

5.1.2 Level C. - Covers shall be packaged in accordance with the industry's practice.

5.2 Packing. - Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A

5.2.1.1 Method 1. - Two hundred (200) covers, packaged as specified in 5.1.1, shall be packed one in the width, ten in the length, and twenty in the depth in a fiberboard shipping container, conforming to class-weather resistant, size No. 2A of MIL-B-17757 and assembled, closed, and strapped in accordance with the appendix thereto.

5.2.1.2 Method 2. - When specified, six level B shipping containers (1200 covers) shall be overpacked in a fiberboard shipping container,

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

conforming to class-weather resistant, size No. 4 of MIL-B-17757 and assembled, closed, and strapped in accordance with the appendix thereto.

5.2.2 Level B. - Two hundred (200) covers, packaged as specified in 5.1.1, shall be packed one in the width, ten in the length, and twenty in the depth in a fiberboard shipping container with liner, conforming to class-domestic, size No. 2A of MIL-B-17757 and assembled and closed in accordance with the appendix thereto.

5.2.3 Level C. - Covers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination, at the lowest rate. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. - In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. - The bayonet scabbard cover is part of the Marine Corps Honor Guard Equipment Set.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification

(b) Level of packaging and packing required (5.1 and 5.2)

(c) Whether preproduction sample is required (3.1.2)

6.3 Samples and shade samples. - For information regarding the availability of samples of the cover and standard black shade of leather, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Figures. - Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall control.

Custodian:
Navy-Marine Corps

Preparing Activity:
Navy-Marine Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

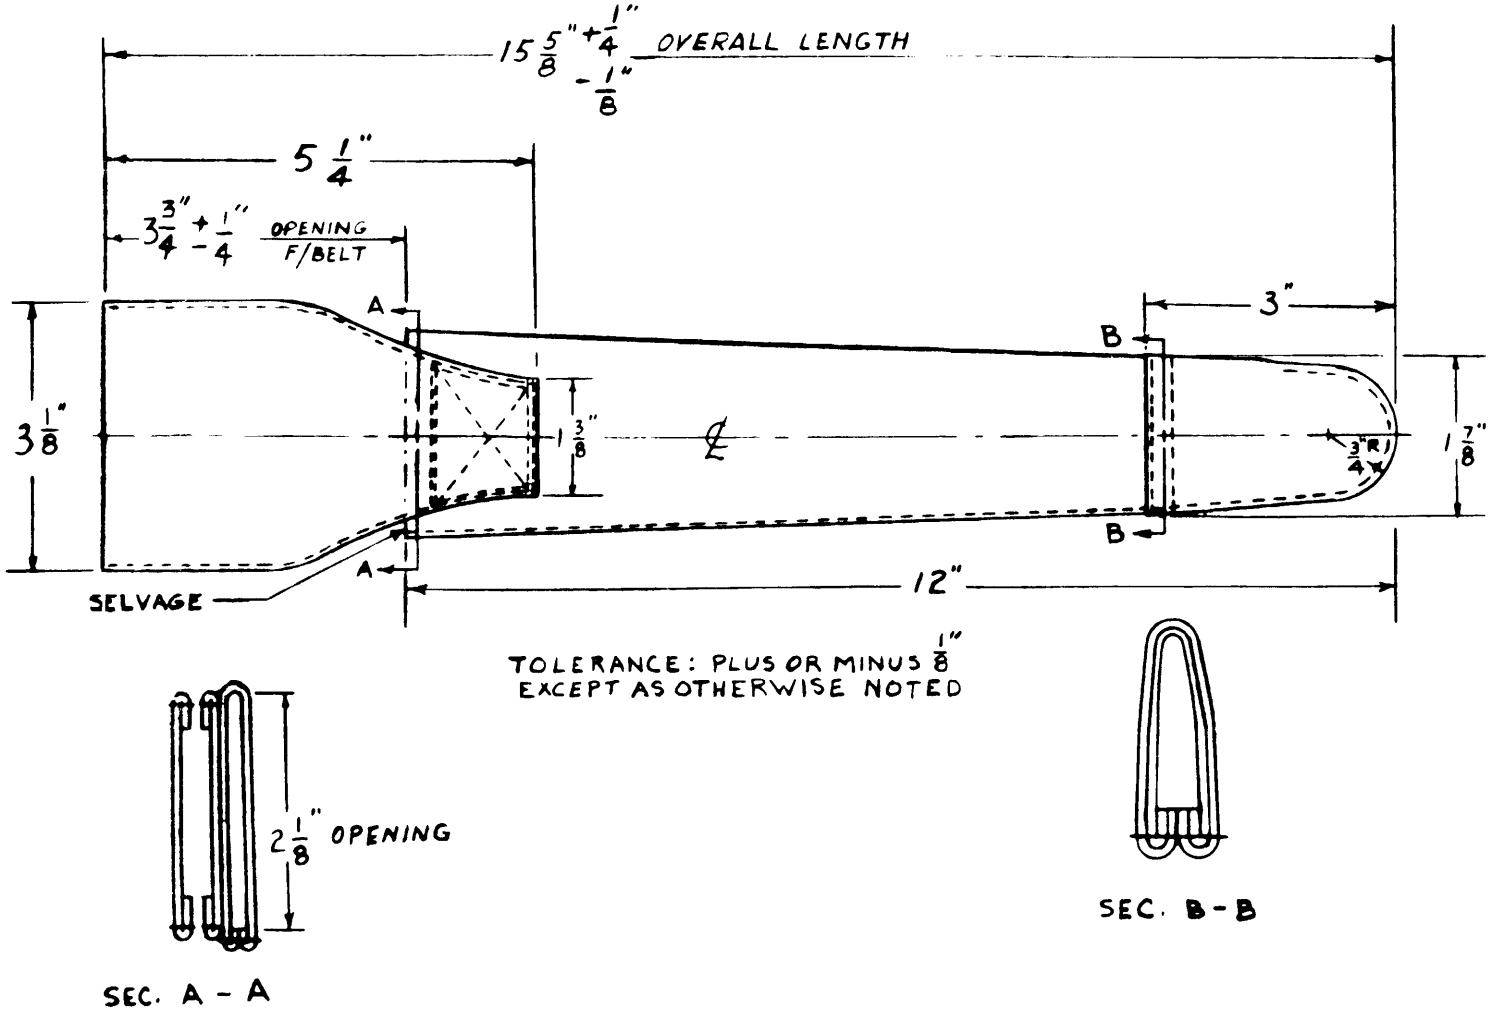


FIGURE 1. COVER, BAYONET SCABBARD; COTTON DUCK; WHITE; W/LEATHER TIP

MCSA 826-GRF 7 JUL '64

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION

ORGANIZATION (Of submitter)	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (*Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity*)

SUBMITTED BY (*Printed or typed name and activity*)	DATE

DD FORM 1 APR 62 1426 REPLACES NAVSHIPS FORM 4063, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.

er of pockets per bundle is more or less than (content Numbe

FOLD

DEPARTMENT OF THE NAVY

Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Penna. 19146

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
NAVY DEPARTMENT

Commanding General (843)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:33Z
Check the source to verify that this is the current version before use.