MIL-T-17760G
3 September 1985
SUPERSEDING
MIL-T-17760F
27 June 1979

MILITARY SPECIFICATION

TRUCKS, PALLET, POWERED: ELECTRIC, NON-TIERING, INDUSTRIAL; WALKIE, WALKIE-RIDER, HAND GUIDED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers heavy duty, electric powered, low-lift forks, hand guided, walkie-type pallet trucks.

1.2 Classification. Pallet lift trucks shall be of the following types and sizes, as specified (see 6.2):

Type E - Nonspark enclosed.

Type EE - Spark enclosed.

Size 1 - 4,000-pound capcity.
Size 2 - 6,000-pound capacity.

1.3 Part number systems. Specification part numbers for trucks described in this specification will be formulated as shown in 1.3.1.


Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

1.3.1 Definitive specification part number. The specification part number is a definitive part number which will be formulated to identify each truck covered by this specification. The part number will be formulated by selecting from the requirement options available in this specification as follows:

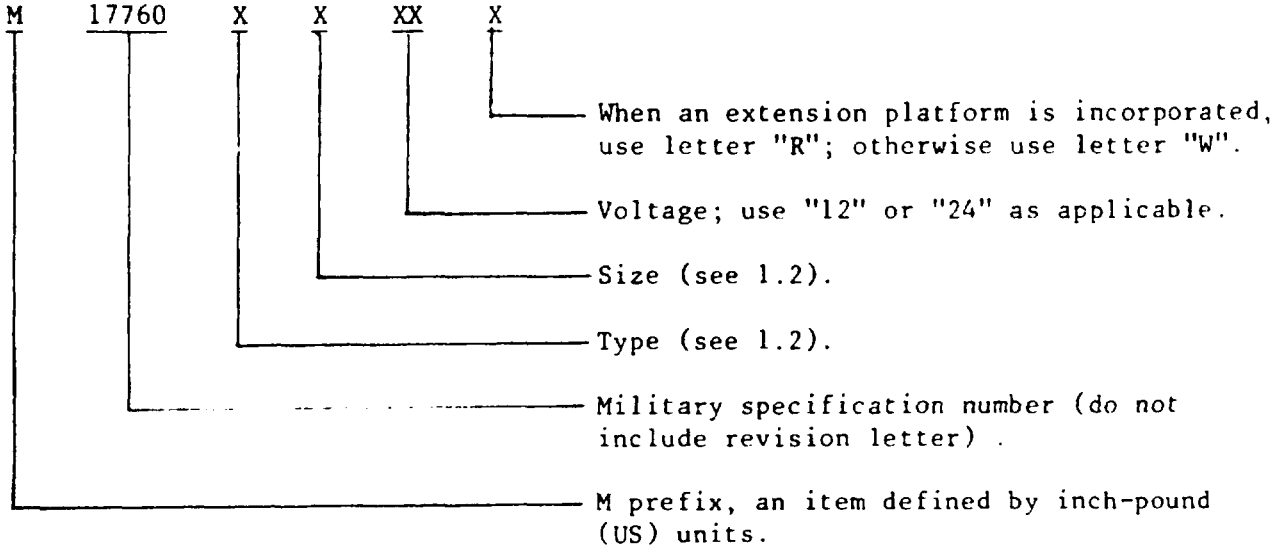

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

W-B-133	- Battery, Storage (Lead Acid, Industrial Portable Service).
QQ-C-320	- Chromium Plating (Electrodeposited).
QQ-P-416	- Plating, Cadmium (Electrodeposited).
ZZ-T-391	- Tire, Solid Rubber, and Wheel, Solid Rubber Tire, (Industrial).

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

MILITARY

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-M-3971	- Meter, Time Totalizing, Non-hermetrically Sealed, Electrical, General Specification For.
MIL-P-15011	- Pallets, Material Handling, Wood, Post Construction, 4-Way Entry.
MIL-G-20241	- Gasket Material, Wool Felt, Impregnated, Adhesive, Pressure-Sensitive.
MIL-S-81733	- Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

FEDERAL

FED-STD-H28	- Screw-Thread Standards for the Federal Services.
FED-STD-595	- Colors.

MILITARY

MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-162	- Materials Handling Equipment: Preparation for Shipment Storage, Cyclic Maintenance, Routine Testing and Processing.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems, Equipment and Facilities.
MS15367	- Battery, Storage, for Electric Powered Industrial Trucks and Tractors.

2.1.2 Other Government publication. The following other Government publication forms a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR, Chapter XVII, Part 1910, Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

(Copies of publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

ANSI/AWS D1.1 - Structural Welding Code - Steel.
ANSI/AWS D1.2 - Structural Welding Code - Aluminum.
ANSI B56.1 - Safety Standard for Low Lift and High Lift Trucks.
ANSI/UL 583 - Standard for Electric-Battery-Powered Industrial Trucks.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Welding Qualifications, Section IX.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 633 - Electrodeposited Coatings of Zinc on Iron or Steel.
ASTM D 3951 - Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION

MG1 - Standard for Motors and Generators.

(Application for copies should be addressed to the National Electrical Manufacturer's Association, 155 East 44th Street, new York, NY 10017.)

SOCIETY OF AUTOMOTIVE ENGINEERS

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The walkie or walkie rider, non-tiering, electric-motor-driven pallet truck (hereinafter referred to as "truck") is powered by an industrial type battery. It is self-loading, low-lift, and is equipped with wheeled forks of dimensions to go between the top and bottom boards of a double-faced pallet, and having wheels capable of lowering into spaces between the bottom boards so as to raise the pallet off the floor for transporting. The operating controls are mounted on the handle.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Materials. Materials shall be as specified herein. Material not specified shall be selected by the contractor and be subject to all provisions of this specification.

3.3.1 Material deterioration and control. The truck shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environment to which the item may be exposed.

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:32Z
Check the source to verify that this is the currentversion before use.

3.3.1.1 Dissimilar metals. Dissimilar metals, as defined in MIL-STD-889, shall be electrically insulated from one another to minimize or prevent galvanic corrosion. Insulation may be provided by an insulating barrier such as a corrosion inhibiting sealant conforming to MIL-S-81733 or chromate tape conforming to MIL-G-20241. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub-components, and shall make information available, upon request, to the contracting officer or designated representative.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the truck may be newly fabricated from recovered materials to the maximum extent practicable, provided the truck produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the truck.

3.3.3 Chromium plate Chromium plate shall conform to QQ-C-320, class 2.

3.3.4 Cadmium plate. Cadmium plate shall conform to QQ-P-416, type II, class 2.

3.3.5 Zinc coating. Zinc coating shall conform to ASTM B 633, type II, SC 4.

3.4 Design. The pallet truck shall be powered by a 12-volt or 24-volt battery. The battery shall energize and operate two electric direct current (dc) motors on separate electrical circuits. One motor shall drive the drive wheel(s) for forward and reverse travel through a gear or chain reduction unit (see 3.5.2.3). The second motor shall drive the hydraulic pump(s). The hydraulic pump(s) shall actuate the hydraulic cylinder piston rod(s) which are connected to the lifting and lowering mechanism for raising and lowering the forks. The truck shall be steered manually by means of steering handle through the drive wheel(s). Controls for forward and reverse travel and speed changes shall be located on the steering handle for easy access of the operator. Control for lowering and raising of forks shall be located for operation by either hand. Rear load wheel(s) shall be provided and shall be located near the ends of each fork for support of the pallet load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

3.4.1 Lubrication. Readily accessible means shall be provided for applying lubricant and where necessary, checking the level of lubricant. Oil drain plugs and connections shall provide for fast drainage using ordinary maintenance shop tools.

3.4.2 Threads. All threaded parts shall conform to FED-STD-H28.

3.4.3 Interchangeability. Corresponding units and replaceable assemblies, subassemblies, and parts in contact shall be physically and functionally interchangeable as complete items without modification thereof or of other articles which the items are used.

3.4.4 Bearing capacity. Bearing load capacity shall be sufficient to withstand manufacturer's recommended rating. Angular contact ball bearings and tapered roller bearings shall provide means for adjustment to compensate for wear.

3.5 Construction.

3.5.1 Electrical equipment. The electrical equipment shall be as specified in 3.5.1.1 through 3.5.1.6.

3.5.1.1 Resistors. Resistors, when used, shall be of the heavy duty type, rated for continuous use. Resistors shall show no evidence of burnout or fusion upon completion of tests specified under 4.5.2. For type EE trucks, the use of resistors shall be avoided to the maximum extent practical.

3.5.1.2 Conductors. For type EE trucks conductors, except battery leads emerging from enclosure(s), shall be through fittings, so that sparks shall not propagate to the atmosphere and dust shall not enter from the atmosphere into the enclosure(s). Identification of control leads shall be provided through color coding, numbered markings, tags, or similar means to identify conductor runs.

3.5.1.3 Overcurrent devices. In addition to the requirements of 3.9, overcurrent devices shall be provided on each power and each control circuit.

3.5.1.4 Static discharge device. Type EE trucks shall be equipped with two replaceable electrically conductive rubber covered copper straps, mounted immediately adjacent to the drive wheels, to discharge static electricity through contact with the road surface.

3.5.1.5 Enclosure and shields. The trucks shall comply with the requirements of ANSI/UL 583. All electrical components, including wiring, shall be located or protected by adequate means to prevent contact by excess moisture or battery electrolyte in the event of spillage.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the current version before use.

3.5.1.6 Indicators. When specified (see 6.2) the truck shall be equipped with a battery discharge indicator and an hour meter indicator visible to the operator. The hour meter shall be in accordance with MIL-M-3971, type I and ANSI/UL 583.

3.5.2 Propulsion equipment. Propulsion equipment shall be as specified in 3.5.2.1 through 3.5.2.6.

3.5.2.1 Traction motors. Traction motors shall be industrial type, with a high starting torque, designed for efficient operation on 12 or 24 volt dc. Motors shall be capable of withstanding the stresses and current loads induced by tests as required by this specification. The resultant strains and temperature rise shall not cause failure of any component part or pitting other than normal discoloration of the commutators.

3.5.2.1.1 Motor insulation. Insulation for motors shall be class B, F, or H as defined in NEMA Standard MG1. The electrical and mechanical properties of the insulated windings shall not be impaired by the application of the temperature permitted for the class insulation used. The word "impaired" is used here in the same sense of causing any change which could disqualify the insulating material for continuous service.

3.5.2.2 Speed controllers. Speed controllers shall provide not less than two forward and two reverse speeds. Controllers shall have automatic electrical or mechanical interlocks to prevent forward starting or reverse starting except through forward or reverse first speed respectively. Contactors shall be designed for operation at voltages developed by the batteries specified in 3.5.3, and shall have replaceable tips of copper alloy or silver alloy composition. There shall be no evidence of failure in any part of the controllers when the truck undergoes the tests specified under 4.5.2. When specified (see 6.2), the 24 volt ac speed controllers shall be the solid state type and shall provide stepless speed control in both forward and reverse directions.

3.5.2.3 Drive unit. Each gear (with the exception of worm gears, if used), sprocket, shaft, and axle shall be of hardened alloy steel. Rotating parts shall be supported on antifriction bearings. The drive unit shall be a gear, steel cable reinforced belt, or chain (or combination thereof) motor reduction unit. Where a gear drive unit is used, it shall operate in a constant oil bath. Gear drive housing shall be equipped with a magnetic drain plug(s) and a filler plug. Where a chain or belt drive is used, slack adjustment shall be provided and shall not require shimming of the motor. The motor reduction unit and drive wheel assembly shall be integrally mounted and shall revolve on antifriction bearings.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the current version before use.

3.5.2.4 Wheels. The drive wheel(s) and load wheels shall show no evidence of damage or failure when tested as specified in 4.5.2.1 through 4.5.2.3. In addition, wheel bearings shall show no evidence of binding or any permanent deformation. Normal wear of tires, load wheels, and bearings will be allowed.

3.5.2.4.1 Drive wheels and tires. Trucks shall be equipped with one or two drive wheel(s). Wheel(s) shall be of the flat face or demountable type constructed from steel or cast iron and shall be mounted on anti-friction bearings. Readily accessible grease fittings (see 3.6.1), shall be provided to facilitate lubrication of the wheel bearings where sealed type bearings are not provided. The drive wheel tire(s) shall be of the industrial solid rubber type. The tire tread shall be nondirectional. Tires for flat face wheels shall be molded onto a steel band for pressing onto the flat faced wheel. Standard solid-rubber tires shall conform to the applicable provisions of ZZ-T-391. When specified (see 6.2), drivewheel tires of the polyurethane type shall be furnished. All tires shall be new and unused, and not more than 2 years old on date of shipment.

3.5.2.5 Load wheels and tires. Trucks shall be furnished with two or four load wheels, mounted on anti-friction bearings. Load wheels shall be assembled to the underside of the forks and shall be positioned to function unobstructed with a maximum 6 inch end board and a 7.5 inch to 10.5 inch wheel opening. Load wheels shall be steel and when specified (see 6.2), the load wheel tires shall be of the polyurethane type.

3.5.2.6 Brakes. The brake shall be of the mechanical external contracting or internal expanding or disc type mounted on the drive motor shaft, counter-shaft, or drive wheel(s). Brake linings (if used) shall be of the woven or molded type and shall be cement bonded to the brake shoes. The brake system shall be interlocked with a relay switch or other means to cause disconnection of the motor circuit from the battery when the brake is applied. The brake shall automatically be applied when the steering handle is within 10 degrees of the vertical and horizontal position. The steering handle shall return from an operating position to a vertical braking position when released. The force required to hold the steering handle in any operating position shall not exceed 10 pounds. Brakes shall be adjustable to compensate for wear. Brakes shall be capable of retaining the truck, with rated load, on a 5^{0} slope (see 3.7.4). In addition, the brake shall enable the truck to develop a drawbar drag equal to a percent of the gross vehicle weight (truck plus rated load) as specified in ANSI B56.1. The test for drawbar drag shall be as specified in 4.5.2.1.

3.5.3 Battery equipment. When specified (see 6.2), one battery shall be furnished for each truck. The battery shall have a capacity of 765 ampere hours at a 6 hour rate and shall conform to W-B-133. Maximum battery dimensions for a 24 volt battery shall be 25.5 inches long, 22 inches wide and 22.675 inches high without cover. Maximum battery dimensions for a 12-volt battery shall be 22.125 inches long, 12.875 wide and 23.250 inches high. Battery leads and connectors shall be as specified in MS15367.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the current version before use.

3.5.3.1 Battery mounting half connector. Each truck shall be equipped with mounting half connector (Yale and Towne Part No. K9014 or equal) to accommodate the locking half connector specified in 3.5.3. Battery connectors shall be color-coded red.

3.5.3.2 Battery support or compartment. Unless otherwise specified (see 6.2), each truck shall be equipped with a battery support or compartment. The support or compartment shall accommodate the battery listed in 3.5.3 for the type and size truck specified. The support or compartment shall be constructed to permit easy inspection, servicing, and removal of the battery. Effective means shall be provided for securing the battery in place. The battery shall not interfere with the operator's line of sight to the tips of the forks. The underside of the battery compartment cover shall have a liner finished with not less than three coats of asphalt paint or equivalent insulating material. If a compartment is furnished, the inside of the compartment shall be finished with an acid and alkaline resistant paint.

3.5.3.3 Battery well. When a battery well is specified (see 6.2), the well shall be approximately 6 inches deep in addition to meeting the applicable requirements of 3.5.3.2.

3.5.4 Hydraulic equipment. The hydraulic equipment shall be as specified in 3.5.4.1 through 3.5.4.5.

3.5.4.1 Hydraulic motor. Power used for lifting forks shall be furnished by a hydraulic pump directly driven by a motor independent of the drive motor.

3.5.4.2 Reservoir. The hydraulic reservoir shall be provided with an accessible filler plug for filling and checking the fluid level and the reservoir shall have sufficient capacity to fill the hydraulic system plus a minimum 10 percent reserve fluid.

3.5.4.3 Pressure relief valve. A pressure relief valve shall be provided which shall open at 110 to 120 percent of the rated load pressure to protect the hydraulic system from damage due to overload and to continued operation of the lift mechanism after the load is lifted to maximum height.

3.5.4.4 Hydraulic assembly. The hydraulic assembly shall be completely sealed (except for breathers) to prevent leakage and contamination of the hydraulic fluid. Component parts of the hydraulic system shall be replaceable. A breather with a filter element may be installed on the oil reservoir. The hydraulic assembly shall be designed and constructed to automatically hold rated load in any position upon release of the lowering mechanism control. When tested as specified in 4.5.2.2, the hydraulic assembly shall show no evidence of leaks, damage, or signs of appreciable wear. "Appreciable wear" is defined as inability of the hydraulic system to lift and hold rated load for a period of 5 minutes with not more than 1/2-inch drift. In addition, the hydraulic system shall withstand the shock load test of 4.5.2.3 without damage of any kind.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

3.5.4.5 Piston rods. Hydraulic cylinder piston rods shall be plated with an electrodeposited hard chrome-plate finish as specified in 3.3.3. The chrome-plate finish shall be not less than 0.0005 inch thick.

3.5.5 Truck structure. The truck structure shall be as specified in 3.5.5.1 through 3.5.5.3.

3.5.5.1 Chassis and frame. The frame and related structures shall be fabricated from structural steel or steel castings. The frame and related structure shall provide a rigid unit structure which affords complete protection for working parts.

3.5.5.2 Forks. Forks shall be constructed from steel plate or channel cross sections. Fork length for trucks shall be 39-1/2 inches to 42 inches or 47-1/2 inches to 48 inches as specified (see 6.2). Maximum distance between outside edges of the forks shall be 27 inches. The space between the inside edges of the forks shall be 8-3/4 inches within a tolerance of plus or minus 1/2 inch. Forks shall be horizontal within a tolerance of plus 1/16 inch or minus 1/8 inch at the ends. Forks shall be end tapered on the underside to facilitate entry or withdrawal from double faced standard military pallets conforming to MIL-P-15011, style I or II. A steel plate-guard shall be provided to protect working parts of the truck, including battery compartment, against damage from pallet inpact.

3.5.5.2.1 Pallet positioner. When specified (see 6.2), truck shall be equipped with a manually operated pallet positioner in order to correctly position either a 40-inch by 48-inch or a 48-inch by 48-inch pallet on the forks. Pallet positioner shall be 8 plus or minus 1/4 inches long and shall be pivot mounted to swing in upright position.

3.5.5.2.2 Hinged skid adapter. When specified (see 6.2), a skid adapter shall be constructed of structural steel. It shall be capable of being pivoted from a vertical upright position to a horizontal down position to permit handling of skid loads. Lowered position of top surface of skid adapter from ground surface shall be 6 plus or minus 1/8 inches when skid adapter is resting on fully lowered forks. Skid adapter shall have approximately the same dimensions as forks specified in 3.5.5.2, with skid width measured across outer edges of forks.

3.5.5.3 Truckhousing. All functioning components, except steering handle, wheels, battery, and forks, shall be enclosed in a housing. The housing shall be constructed to permit access for inspection, servicing, and maintenance purposes. The height and width of the housing shall be such as to provide the operator with an unobstructed view of fork tips when the operator is in the operating position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

3.5.6 Controls. Electric controls shall be heavy duty type. All controls shall be provided with position markings at the control(s). Decals are not acceptable for control position marking.

3.5.6.1 Direction and speed controls. Direction and speed controls (rotating handles, buttons, levers, or switches) shall be mounted on the steering handle and shall be conveniently located so that operator may use either hand to control speed and direction. Means shall be provided to prevent simultaneous actuation of forward and reverse controls. Rotating handles shall be arranged so that forward rotation (same rotation as wheels) will cause forward motion of truck and reverse rotating will cause reverse motion of truck. Trigger type controls are not acceptable. If buttons are used, the one located nearest the operator shall, when actuated, cause forward motion of the truck. The controls shall be so designed that they return to neutral position when released.

3.5.6.2 Lift and lower controls. The lift and lower controls for the forks shall be lever or button actuated types and shall be conveniently located for operation by either hand. If buttons are used for both lifting and lowering, the one located nearest the operator, or the upper if arranged vertically, shall when actuated, raise the forks. The lift control shall be so arranged that the forks will remain at any position reached when the control is released. The controls, when deactivated, shall return to neutral position.

3.5.7 Steering. The trucks shall be steered through the drive wheel(s) by a steering handle equipped with hand grips. The diameter of the hand grips shall be between 1-3/8 and 1-3/4 inches. The truck shall turn in the same direction as the steering handle when in forward motion. The forward end of the truck shall be the end which contains the control unit. The steering handle shall turn the drive wheel assembly a minimum of 90 degrees in each direction from the neutral position. The drive wheel assembly shall be mounted on angular contact ball bearings or tapered roller bearings or a combination of both bearings. Provision shall be made for adjustment of adjustable type bearings (to compensate for wear) and for lubrication of all friction points by accessible grease fittings as specified in 3.6.1 or by a lubricant reservoir. When provided, the lubricant reservoir shall be easily accessible for filling and checking of lubricant level. A button or lever shall be attached at the end(s) of steering handle so that when steering handle is in operating position and the button or lever comes in contact with operator or obstruction, the truck shall stop (by application of brake) or reverse direction (by reversing motor shaft rotation). Provision shall be made so that all power to the traction motor is interrupted when the operator releases handle of truck.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

3.6 Maintainability. Provision shall be made for ready adjustment, servicing, and replacement of all electrical assemblies and components, battery, wearing parts of lift mechanism, brake and components, wearing parts of steering assembly, tires, wheels, and horn without the removal of any major parts other than covers. If hand access openings are used on the exterior of the truck, the edges of the openings shall be smooth and shall be provided with a removable or hinged cover. There shall be no interference to the servicing and draining of oils and lubricants to and from any assembly or components by frame members or other obstructions, and without requiring the use of flexible connections or other special device. Draining plugs shall provide for complete drainage.

3.6.1 Lubrication fittings. Lubrication fittings shall conform to SAE J534. Fittings shall be located in a protected position and shall be accessible to a hand-operated grease gun. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts.

3.7 Performance.

3.7.1 Travel speed. The truck shall be capable of traveling within the range of mile per hour (mph) speeds for both forward and reverse directions as shown in table I.

TABLE I. Truck travel speed.

Travel speed control	Voltage	Size 1		Size 2	
		Mph with no load (maximum)	Mph with rated load (minimum)	Mph with no load (maximum)	Mph with rated load (minimum)
Low speed range, all trucks	12, 24	1.8	1.2	1.5	1.0
High speed range, without extension platform:	12	3.7	2.4	3.7	2.2
	24	4.4	3.0	4.4	2.7
High speed range, with extension platform:	12	6.2	4.2	6.2	3.6
	24	7.7	5.4	7.7	4.9

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

3.7.2 Lifting mechanism. The lifting mechanism shall be capable of raising rated load on forks to a height of 4 inches minimum, above the lowered position of the forks. Lowered position of top surface of forks from ground surface shall not exceed 3-1/4 inches.

3.7.3 Lifting and lowering speed. The lifting mechanism (hydraulically operated) shall be capable of raising rated load on forks from lowered position to maximum lift height (see 3.7.2), in not more than 6 seconds. Lowering speed of the forks, with rated load, shall be manually controlled by activating and deactivating the lowering control to stop and hold load at random heights.

3.7.4 Slope ascension. The truck, with rated load, shall be capable of ascending a 5-degree slope (dry, smooth, concrete surface) from a dead stop position on the slope in both the forward and reverse truck direction.

3.7.5 Turning radius. The truck, with rated load, shall be capable of turning clockwise and counterclockwise a full 360 degrees in both the forward and reverse directions within a circle whose radius is not greater than 80 inches. All parts of the truck structure shall remain within this allowable circle.

3.7.6 Pallet entry and withdrawal. The forks of the truck shall be capable of complete entry and withdrawal from an empty double-faced pallet conforming to MIL-P-15011, style I and II, without moving the pallet more than 6 inches in either forward or backward direction. There shall be no physical contact between the top surface of the load wheels and the under surface of the deck boards and the surfaces of the load wheels shall not come in contact with the forks during entry and withdrawal.

3.7.7 Steering force. The force required at the steering handle (with the handle grips of the steering handle located 40 inches, plus or minus 1 inch above the floor surface) to turn the drive wheel(s) in either direction when truck is at standstill and carrying rated load shall not exceed 70 pounds.

3.7.8 Load capacity. The truck shall shown no evidence of permanent deformation or damage of any kind when subjected to a static load of 200 percent of rated capacity.

3.7.9 Shock load resistance. The truck shall show no evidence of permanent deformation, damage of any kind, or setting exceeding 1/8-inch, when subjected to a shock load test.

3.7.10 Endurance. The truck shall be capable of completing the 1,000 cycle endurance test specified in 4.5.2.11 without failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

3.8 Human factors. The design of the truck shall be in accordance with the accepted criteria for human factors as described in MIL-STD-1472.

3.9 Safety. The design of the truck shall be in accordance with the criteria for safety described in ANSI B56.1. The truck shall conform to the applicable requirements of ANSI/UL 583 and such additional requirements as specified herein, and with the Occupational Safety and Health Standards requirements of 29 CFR, chapter XVII, part 1910.

3.9.1 Safety certification. The contractor shall obtain and make available for review by the contracting officer, or his authorized representative, satisfactory evidence that the trucks furnished under this specification meet the requirements of 3.9. Acceptable evidence of meeting these requirements shall be a UL label, or a certified test report from a recognized independent testing laboratory acceptable to the Government, indicating that the trucks conform to the requirements of 3.9.

3.10 Detailed requirements.

3.10.1 Type E trucks. Motor(s) for type E trucks shall not be the enclosed type or not completely enclosed.

3.10.2 Type EE trucks. Motor(s) for type EE trucks shall be of the enclosed type or be completely enclosed.

3.10.3 Sizes.

3.10.3.1 Size 1. The size 1 truck shall have a load carrying capacity of not less than 4,000 pounds.

3.10.3.2 Size 2. The size 2 truck shall have a load carrying capacity of not less than 6,000 pounds.

3.10.4 Extension platform. When specified (see 6.2), the truck shall be equipped with an extension platform at the control end of the truck to accommodate a rider while the truck is moving. The platform shall be fabricated from steel plate with a non-skid surface. The platform shall have sufficient depth to permit the operator to stand within the plan outline of the truck.

3.11 Color and finish.

3.11.1 Treatment and painting. The portions of the truck normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, type A, F or G. Unless otherwise specified (see 6.2), the finish color shall be yellow corresponding to color no. 13538 of FED-STD-595.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

3.11.2 Plating and coating. Fastening devices such as cotter pins, washers, nuts, and bolts, which are fabricated from noncorrosion-resisting steel shall be cadmium plated as specified in 3.3.4, or zinc coated as specified in 3.3.5.

3.12 Identification marking. The truck shall be identified in accordance with MIL-STD-130. The marking shall be applied to the truck on plates conforming to MIL-P-514, type I, style 1, composition C, of type I, grade A, class 1 material. Plates shall be attached by screws, bolts, or rivets in a location where the plate will be both visible and legible.

3.12.1 Vehicle marking. The assigned registration number for each truck shall be painted in black enamel, in block numbers 3 inches high on truck body or battery compartment. Registration numbers for Air Force shall be 1-1/2 inches high. The capacity of the truck shall be marked in black numbers.

3.12.2 Instruction plates. Each truck shall be equipped with instruction plates or diagrams, including warnings and cautions, describing any special or important procedures to be followed in loading, operating, or servicing the truck. Instruction plates shall conform to MIL-P-514, type III, composition C, of type I, grade A, class 1 material. Plates shall be attached by screws, bolts, or rivets in a location where the plate will be both visible and legible.

3.13 Electromagnetic interference (EMI) suppresion. When specified (see 6.2), the truck shall be equipped for control of EMI in accordance with SAE J551.

3.14 Workmanship. The truck shall withstand any operation specified herein without permanent deformation, breakage of connections, malfunction, or component interference caused by incorrect workmanship. All parts of the truck before and after painting shall be clean and free from sand, rust, dirt, fins, pits, sprues, scale, flux, and other harmful extraneous material. Edges and surfaces exposed to operating and maintenance personnel shall be smooth and rounded.

3.14.1 Rivet connections. Rivet holes, in the sizes recommended by commercial practice, shall be accurately formed or drilled, and shall have burrs removed. Rivets shall be driven with power tools. Rivet heads shall be full, neatly made, concentric with rivet holes, in full contact with the surface of the member, and shall be in accordance with SAE J492. Excessive upsetting of rivets to fill holes shall not be acceptable.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

3.14.2 Bolted connections. Boltholes shall be accurately formed. Washers or lockwashers or a combination of the two shall be provided on all bolts, studs, and capscrews having straight thread. Self-locking nuts are acceptable in lieu of standard nuts and lockwashers. All fasteners shall be correctly torqued and shall have full thread engagement.

3.14.3 Steel and other metal fabrication. Metals used in the fabrication of the truck shall provide original quality surface finish and shall be free of kinks and sharp bends. Metals having corroded or pitted surfaces are not acceptable. The straightening of materials shall be done by methods that will not cause weakening or injury to the material. Burrs and sharp edges in holes and on sheets, plates, and members shall be removed sufficiently to assure correct fits and to prevent loosening of fastners and damage to components. Splatter and slag shall be removed from flame cut material.

3.14.4 Welders and welding.

3.14.4.1 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall obtain certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

Structural Welding Codes, ANSI/AWS D1.1, ANSI/AWS D1.2, as applicable.
Welding Qualifications of the ASME, Section IX.

Certification shall be made available for review by the contracting officer or his authorized representitive.

3.14.4.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. No cracks shall be allowed.

3.14.5 Castings. Castings shall be of a quality normally used in commercial practice and shall be of uniform quality and condition, free from injurious blowholes, porosity, hard spots, shrinkage defects, cracks, or other injurious defects. Castings shall be commercially machineable and shall not be repaired, plugged, or welded.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contract . may use his own or in 4.5.1. Presence of one or more defects shall be cause for rejection of the

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article truck shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection of the first article.

4.3.2 Tests. The first article truck shall be subjected to the tests marked "X" in column 1 of table II in the order indicated in the table. Failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection.

4.4.1 Examination. Each truck furnished shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each truck shall be subjected to the test marked "X" in column 2 of table II. Failure of any test shall be cause for rejection of the truck.

4.5 Inspection procedure.

4.5.1 Examination. The truck shall be examined as specified herein for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

Defect No.	Defect	Requirement Paragraph
	Major	
101.	Materials not as specified.	3.3
102.	Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments.	3.3.1
103.	Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.	3.3.1.1
104.	Contractor does not have documentation available for identification of material, material finishes, or treatment.	3.3.1.2
105.	Used, rebuilt or remanufactured components, pieces, or parts incorporated in the truck.	3.3.2
106.	Plating not as specified.	3.3.3, 3.3.4, 3.3.5, 3.11.2
107.	Lubrication not as specified.	3.4.1
108.	Threads not as specified.	3.4.2
109.	Interchangeability not as specified.	3.4.3
110.	Electrical conductors not as specified.	3.5.1.2
111.	Overcurrent devices not as specified.	3.5.1.3
112.	Static discharge devices not as specified.	3.5.1.4
113.	Enclosure and shields not as specified.	3.5.1.5
114.	Indicators not as specified.	3.5.1.6
115.	Traction motors not as specified.	3.5.2.1
116.	Motor insulation not as specified.	3.5.2.1.1
117.	Speed controllers not as specified.	3.5.2.2
118.	Drive unit not as specified.	3.5.2.3
119.	Batteries not of the size and capacity specified.	3.5.3
120.	Battery mounting half connector not as specified.	3.5.3.1
121.	Battery compartment or well not as specified.	3.5.3.3, 3.5.3.2
122.	Hydraulic motor not as specified.	3.5.4.1
123.	Hydraulic reservoir not as specified.	3.5.4.2
124.	Pressure relief valve not as specified.	3.5.4.3
125.	Piston rods not as specified.	3.5.4.5
126.	Chassis and frame not as specified.	3.5.5.1
127.	Forks not as specified.	3.5.5.2
128.	Pallet positioner not as specified.	3.5.5.2.1
129.	Hinged skid adapter not as specified.	3.5.5.2.2
130.	Truckhousing not as specified.	3.5.5.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

131.	Electric controls not as specified.	3.5.6
132.	Direction and speed controls not as specified.	3.5.6.1
133.	Lift and lower controls not as specified.	3.5.6.2
134.	Steering not as specified.	3.5.7
135.	Maintainability not as specified.	3.6
136.	Lubrication fittings not as specified.	3.6.1
137.	Human factors not as specified.	3.8
138.	Truck safety not as specified.	3.9
139.	Type E and type EE truck motors not as specified.	3.10.2, 3.10.1
140.	Size 1 truck load capacity not as specified.	3.10.3.1
141.	Extension platform not as specified.	3.10.4
142.	Size 2 truck load capacity not as specified.	3.10.3.2
143.	Plating and coating not as specified.	3.11.2
144.	Vehicle marking not as specified.	3.12.1
145.	Instruction plates not as specified.	3.12.2
146.	Truck not equipped to control EMI when specified.	3.13
147.	Workmanship not as specified.	3.14
148.	Riveted connections not as specified.	3.14.1
149.	Bolted connections not as specified.	3.14.2
150.	Steel and other metal fabrication not as specified.	3.14.3
151.	Welder certification not available for review.	3.14.4.1
152.	Welding not as specified.	3.14.4.2
153.	Castings not as specified.	3.14.5

Minor

201.	Treatment and painting not as specified.	3.11.1
202.	Identification marking missing, incomplete or not legible.	3.12

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

4.5.2 Tests. All truck tests shall be made with a fully charged battery.

TABLE II. Test schedule.

First article	Quality conformance	Test	Requirement paragraph	Test paragraph
1	2	3	4	5
X	X	Brakes	3.5.2.6	4 5.2.1
X		Steering handle holding	3.5.2.6	4.5.2.2
X	X	Travel speed	3.7.1	4.5.2.3
X	X	Lifting and lowering speed	3.7.2, 3.7.3	4.5.2.4
X	X	Slope ascension	3.7.4	4.5.2.5
X	X	Turning radius	3.7.5	4.5.2.6
X		Pallet entry and withdrawal	3.7.6	4.5.2.7
X	X	Steering force	3.7.7	4.5.2.8
X	X	Load capacity	3.7.8, 3.5.2.4	4.5.2.9
X	X	Shock load resistance	3.7.9, 3.5.2.4	4.5.2.10
X		Endurance	3.7.10, 3.5.1.1, 3.5.2.2, 3.5.2.4, 3.5.4.4	4.5.2.11

4.5.2.1 Brakes. Trucks shall be tested in accordance with ANSI B56.1 to determine compliance with the requirements of 3.5.2.6. Nonconformance to 3.5.2.6 shall constitute failure of test.

4.5.2.2 Steering handle holding force. A tension dynamometer shall be attached at the handgrip. A force shall be applied to the tension dynamometer tangent to the arc through which the steering handle moves (vertical plane). The steering handle shall be made to rotate about its pivot point (vertical plane) from its top most position to its lower most position. The maximum force at the tension dynamometer shall be read to determine compliance with the applicable requirements of 3.5.2.6. Nonconformance to 3.5.2.6 shall constitute failure of test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

4.5.2.3 Travel speed. The truck shall be given an initial warm-up for a mimimum period of 15 minutes in low speed. The truck shall then be accelerated on a dry, smooth, level concrete surface through a 70-foot approach and then timed through an 88-foot interval. Three runs each shall be made in both the forward and reverse directions for each speed. The truck shall be loaded with rated load to determine compliance with minimum speed requirements and shall be without load to determine compliance with maximum speed requirements. The average speed for each of the three runs shall be used to determine compliance with 3.7.1. Nonconformance to 3.7.1 shall constitute failure of test.

4.5.2.4 Lifting and lowering speed. Rated load shall be placed on the lowered forks with truck on level surface. The lift control shall be actuated and the load lifted to maximum lift height. The time in seconds shall be taken by a timing device from the instant forks begin to rise to the end of full lift height. This test shall be repeated at least five times and all data tabulated and averaged. The average time required to raise rated load from lowered position to maximum lift height shall not exceed the limit specified in 3.7.2. The lowering control shall be manually activated and deactivated to determine compliance with the applicable requirement of 3.7.3. Nonconformance to 3.7.2 or 3.7.3 shall constitute failure of test.

4.5.2.5 Slope accension. The truck, with rated load tied securely, shall be accelerated along a horizontal hard surface and onto a smooth, concrete 5-degree slope and brough to a dead stop on the slope. The truck shall then be accelerated up the slope to a second horizontal hard surface and returned down the slope to the first horizontal surface to determine compliance with the requirement of 3.7.4. The test shall be performed in both the forward and reverse direction. Nonconformance to 3.7.4 shall constitute failure of test.

4.5.2.6 Turning radius. The truck with rated load equally distributed on the forks (or pallet), shall be placed on a smooth, dry, level concrete surface. The truck shall be operated to travel in a circular path to determine conpliance with the requirements of 3.7.5. Nonconformance to 3.7.5 shall constitute failure of this test.

4.5.2.7 Pallet entry and withdrawal. An empty double faced pallet conforming to MIL-P-15011 shall be placed with its front edge on a reference line on a smooth dry concrete floor. The forks of the truck under test shall be fully engaged into the pallet (an end view of pallet). The distance from the referenced line to same reference point on the pallet edge shall be measured. This test shall then be repeated 10 times. The pallet edge shall be placed on a reference line to the same reference point on the pallet edge shall be measured. The test shall be repeated 10 times. The average distance through which the pallet moves either in a forward or backward direction, shall be calculated to determine compliance with the applicable requirements specified in 3.7.6. Nonconformance to 3.7.6 shall constitute failure of test.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

4.5.2.8 Steering force. The truck with rated load equally distributed on the forks (or pallet), shall be placed on a smooth, dry, level concrete surface. The steering handle shall be positioned so that the handlegrip(s) is 40 inches, plus or minus 1 inch, above the concrete surface. A tension dynamometer shall be attached at the handlegrip. A force shall be applied to the tension dynamometer tangent to the arc through which the steering handle moves (horizontal plane). The steering handle shall be made to turn in each direction from the neutral position in an arc of 80 degrees, minimum. Three readings in each direction shall be taken and the average of each of the three readings shall be calculated to determine compliance with 3.7.7. Nonconformance to 3.7.7 shall constitute failure of test.

4.5.2.9 Load capacity. The truck shall be placed on smooth, dry, level concrete floor with forks elevated to maximum lift height. Pressure relief valve shall be made inoperative for this test. A uniformly distributed load of 8,000 pounds for size 1 truck and 12,000 pounds for size 2 truck shall be placed on the forks of the truck. The truck shall remain under test load for a period of 1 hour after which the load shall be removed and the truck shall be examined for evidence of damage to determine conformance with the applicable requirements specified in 3.7.8. In addition, all wheels, including wheel bearings shall be inspected to determine compliance with 3.5.2.4. Nonconformance to 3.7.8 or 3.5.2.4 shall constitute failure of test.

4.5.2.10 Shock load. The pressure relief valve shall be made inoperative for this test. A uniformly distributed load of either 6,000 pounds for size 1 truck or 9,000 pounds for size 2 truck shall be securely placed on the forks of the truck. The loaded truck with forks at maximum height shall be placed on a level surface plate. The following reference heights from the level surface plate to the points of measurement on the truck indicated below shall be measured and recorded, and the points of measurement on the truck shall be marked on the truck. (1) front end of frame, (2) front pivot point of raising and lowering mechanism, (c) top of forks at heel on both sides, (d) top of forks midway between front and rear pivot point of raising and lowering mechanism on both sides. The loaded truck shall then be completely rolled off a 1-inch high platform 10 times. The loaded truck shall then be completely rolled off a 1-inch high platform 10 times. The loaded truck shall be replaced on the level surface plate and the heights from the level surface plate to the points of measurement on the truck described above shall be measured and recorded for comparison with the referenced heights recorded above to determine compliance with the settling requirement of 3.7.9. Settling shall not include any hydraulic drift occurring during the shock load test. The truck shall be inspected for structural damage. In addition, all wheels, including wheel bearings shall be inspected to determine compliance with 3.5.2.4. Nonconformance to 3.7.9 or 3.5.2.4 shall constitute failure of test.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

4.5.2.11 Endurance test. The truck shall be subjected to an endurance test consisting of 1,000 cycles. One cycle shall be as outlined herein. The truck shall lift rated load, as applicable to truck size, to maximum height and propelled in a clockwise forward direction about a circle of 120 radius (min) through 360 degrees after which the brakes shall be applied. The load shall then be lowered; raised again and the truck propelled as above in a counterclockwise direction after which the brake shall be applied. A 5-minute rest period may be allowed between each 25 cycles completed. At the end of 1,000 cycles, the rated load shall be lifted to maximum lift height and held for a period of 5 minutes to determine compliance with the drift allowance (1/2 inch) specified in 3.5.4.4. After completion of the above test, the hydraulic system shall be inspected for leaks to determine compliance with the applicable requirements specified in 3.5.4.4. In addition, all wheels, including wheel bearings shall be inspected to determine compliance with 3.5.2.4. Nonconformance to 3.7.10, 3.5.1.1, 3.5.2.2, 3.5.2.4, or 3.5.4.4 shall constitute failure of test.

4.6 Inspection of packaging. Inspection of preservation, packing and marking for levels A and B shall be in accordance with MIL-STD-162. Commercial preservation, packing and marking shall be examined for conformance to ASTM D 3951 and the requirements specified herein.

5. PACKING

5.1 Preservation, packing and marking. Preservation, packing and marking shall be level A, level B or commercial as specified (see 6.2).

5.1.2 Levels A and B. Levels A and B preservation, packing and marking shall be in accordance with the requirements of MIL-STD-162, type II.

5.1.3 Commercial. Commercial preservation, packing and marking shall be in accordance with ASTM D 3951. Additionally, each exterior container shall be marked with the cube and gross weight.

6. NOTES

6.1 Intended use. Trucks described herein are intended for moving palletized loads in and around warehouses, loading platforms, and docks within the military supply system over paved or other hard surfaces for short distances.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Type and size required (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:32Z
Check the source to verify that this is the currentversion before use.

c. When a first article is required for inspection and approval and the number of units required (see 3.2).

d. Voltage design of truck required (see 3.4).

e. When a battery discharge indicator and an hour meter indicator shall be furnished on the truck (see 3.5.1.6).

f. When solid state 24 volt speed controller is required (see 3.5.2.2).

g. When polyurethane tires are required (see 3.5.2.4.1 and 3.5.2.5).

h. When battery is required including type and its condition (see 3.5.3).

i. When battery support or compartment or battery well is required (see 3.5.3.2 and 3.5.3.3).

j. Length of forks required (see 3.5.5.2).

k. When pallet positioner is required (see 3.5.5.2.1).

l. When hinged skid adapter is required (see 3.5.5.2.2).

m. When an extension platform to accommodate a rider is required (see 3.10.4).

n. Color of finish other than specified (see 3.11.1).

o. When EMI control is required (see 3.13).

p. Degree of preservation and degree of packing required (see 5.1).

6.3 First article. When a first article inspection is required, the items should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests and approval of the first article test results and disposition of the documents first articles.

6.4 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operation manual to be furnished with each truck.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

6.5 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions on shipment of trucks.

Custodians:
Army - ME
Navy - SA
Air Force - 99

User activities:
Navy - OS, AS
Army - AT
Air Force - 84

Preparing activity:
Army - ME

Project 3930-0600

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir R&D Center
ATTN: STRBE-DS
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-17760G	Trucks, Pallet, Powered: Electric, Non-Tiering, Industrial; Walkie, Walkie-Rider, Hand Guided

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 20261O-18T10:32Z
Check the source to verify that this is the current version before use.