MIL-C-23020/1A(EC)
3 June 1968
SUPERSEDING
MIL-C-23020/1(SHIPS)
12 April 1965

MILITARY SPECIFICATION SHEET

CABLE, COAXIAL (FOR SUBMARINE USE) TYPE RG-293A/U

The complete requirements for procuring cable described herein shall consist of this document and the latest issue of MIL-C-23020(SHIPS).

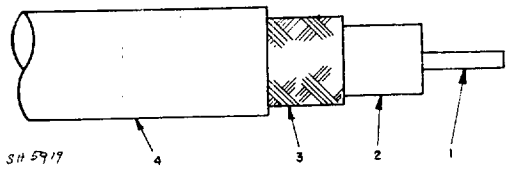

Description	Contructional details
(1) Inner conductor	Bare copper wire 0.106 ± 0.001 inch.
(2) Cable core	Solid type A - Overall diameter 0.370 ± 0.010.
(3) Outer conductor	Single braid, AWG size 36, 5 percent silver covered copper wire 0.410-inch maximum. Braid tension - 1.5 pounds minimum. Carriers 24 Ends 10 Picks/inch 11.6 ± 10 percent
Ⓐ (4) Jacket	Type IIIA of MIL-C-17. Overall diameter 0.545 ±0.010 inch. Jacket thickness 0.055 inch minimum. Other jacket materials may be used provided all other requirements, including non-contamination, and is colored black for protection against ultraviolet radiation (see MIL-C-17). A tape may be applied under the jacket, if desired.

Ⓐ Denotes changes

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:14Z
Check the source to verify that this is the current version before use.

	Requirements
Dielectric strength	- 12,000 volts r.m.s., minimum.
Corona	- 7,000 volts r.m.s., minimum.
Attenuation	- 4 db/100 ft. maximum at 400 mc. 15 db/100 ft. maximum at 3000 mc.
Impedance	- 50 ± 2 ohms.
Hydrostatic test:	
Fitting	- MX-2327/U (Drawing REC49366)
Leakage	- "0" cubic inch.
Pressure	- 1000 p.s.i.
Duration	- 2 hours.
Abrasion	- 500 revolutions

Preparing activity:
Navy - EC
(Project 6145-N036)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-509/A-264

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:14Z
Check the source to verify that this is the current version before use.