
MIL-C-23020/2A(EC)
3 June 1968
SUPERSEDING
MIL-C-23020/2(SHIPS)
12 April 1965

MILITARY SPECIFICATION SHEET

CABLE, COAXIAL (SUBMARINE USE) TYPE RG-294A/U

The complete requirements for procuring cable described herein shall consist of this document and the latest issue of MIL-C-23020(SHIPS).

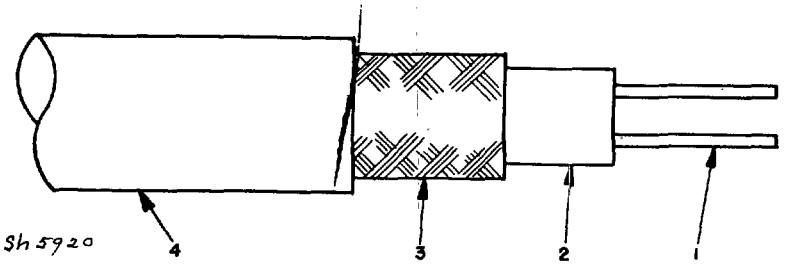

Description	Constructional details
Ⓐ (1) Inner conductors	The conductor nominal diameter .0808. One conductor shall be tinned for circuit identification and the other conductor shall be uncoated. Conductors shall be twisted with a maximum lay of 24 inches, with 5/32 inch spacing between conductors.
(2) Cable core	Solid, type A. Overall diameter 0.472 ± 0.010 inch.
(3) Outer conductor	Single braid, AWG-33 silver copper wire, overall diameter 0.540 inch maximum. The outer conductor shall be filled with a suitable blocking compound.
	Carriers 24 Ends 10 Picks/inch 7.5 ± 10 percent
Ⓐ (4) Jacket	Type IIIA of MIL-C-17 - Overall diameter 0.630 ± 0.010 inch. Minimum jacket thickness 0.040 inch (Other jacket materials may be used, provided the cable meets all other requirements, including noncontamination, and is colored black for protection against ultraviolet radiation (see MIL-C-17)).

Note: Other types of construction which would result in a more watertight cable may be used, provided permission is obtained from the procuring activity.

Ⓐ Denotes changes

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:14Z
Check the source to verify that this is the current version before use.

	Requirements
Dielectric strength	- 10,000 volts rms.
Capacitance unbalance	- 10 percent maximum.
Attenuation	- 10 db/100 ft. max. at 400 mc.
Impedance	- 95 ± 5 ohms.
Hydrostatic test:	
Fitting	- MX-2646/U (Drawing REB49397)
Leakage	- "0" cubic inch
Pressure	- 1000 p.s.i.
Duration	- 2 hours.
Abrasion	- 500 revolutions.

Preparing activity:
Navy - EC
(Project 6145-N037)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:14Z
Check the source to verify that this is the current version before use.