MIL-C-60181(MU)
AMENDMENT 2
10 October 1967
SUPERSEDING
AMENDMENT 1
28 April 1967

MILITARY SPECIFICATION

CONTAINER, SHIPPING, REUSABLE: 10539223

This amendment forms a part of Military Specification MIL-C-60181(MU), dated 2 March 1965.

Paragraph 2.1: Delete: "MIL-A-5090 Adhesives, Heat Resistant, Airframe Structural, Metal to Metal."

Paragraph 3.3.3.2: Delete in entirety and substitute the following:

"3.3.3.2 Bonding of extrusions.- The sealing extrusions shall be attached to the container shells with an air curable adhesive sealant, conforming to General Electric RTV 118 and Primer SCP 154, General Electric Co., Waterford, N. Y. or equal. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry for a minimum of thirty (30) minutes. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and a pressure tight joint. Minimum cure time for sealant is twenty-four (24) hours. The sealing extrusions shall be tool rolled and crimped around the periphery to assure positive attachment to container shells.

Delete: "Figures 3 and 4" and substitute attached "Figures 3 and 4."

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A058

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.2 MIL-C-60181
   STARTING THICKNESS .250±.005
   COLOR-OLIVE DRAB, COLOR NUMBER X24087 OF FED-STD-595
   FINISH-HAIRCELL GRAIN (EXTERIOR SURFACE)
   HAIRCELL GRAIN OR SMOOTH (INTERIOR OPTIONAL)
   FORMED THICKNESS .120 +.020 −.010
2. TOLERANCE-
   DECIMALS ±.062
   ANGLES +1° −0°

SUGGESTED MATERIAL SOURCES:
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA 1492

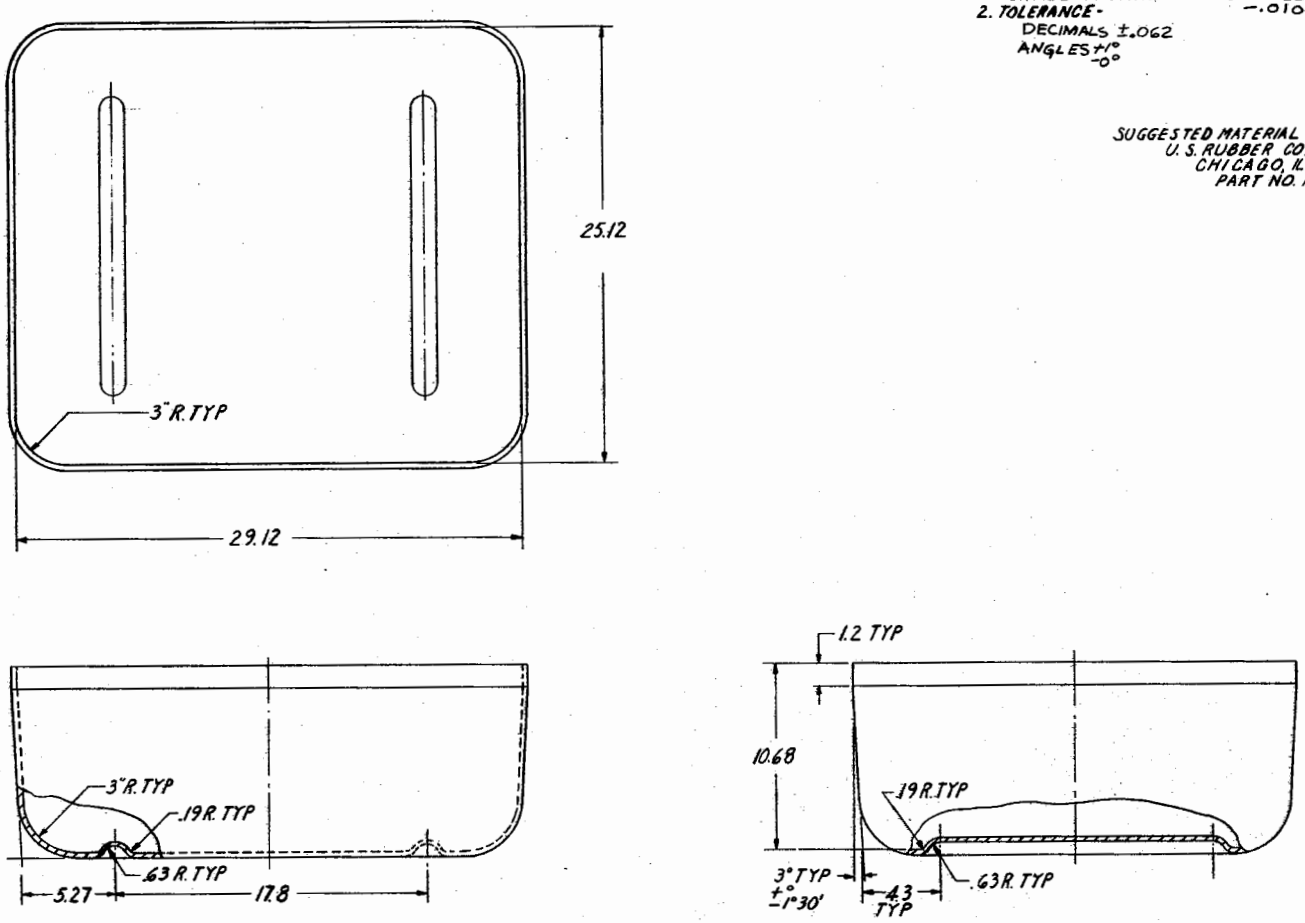


FIGURE 3 - SHELL, BODY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.


NOTES:

1. MATERIAL SHALL BE AS SPECIFIED IN PAR 3.2 MIL-C-60181
   STARTING THICKNESS .250±.005
   COLOR-OLIVE DRAB, COLOR NUMBER X24087 OF FED-STD-595
   FINISH-HAIRCELL GRAIN (EXTERIOR SURFACE)
   HAIRCELL GRAIN OR SMOOTH (INTERIOR OPTIONAL)
   FORMED THICKNESS .120 +.020 −.010
2. TOLERANCES - DECIMALS ±.062
   ANGLES +1° −0°

DECIMALS ±.062
ANGLES +1° −0°

SUGGESTED MATERIAL SOURCES:
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA 1492

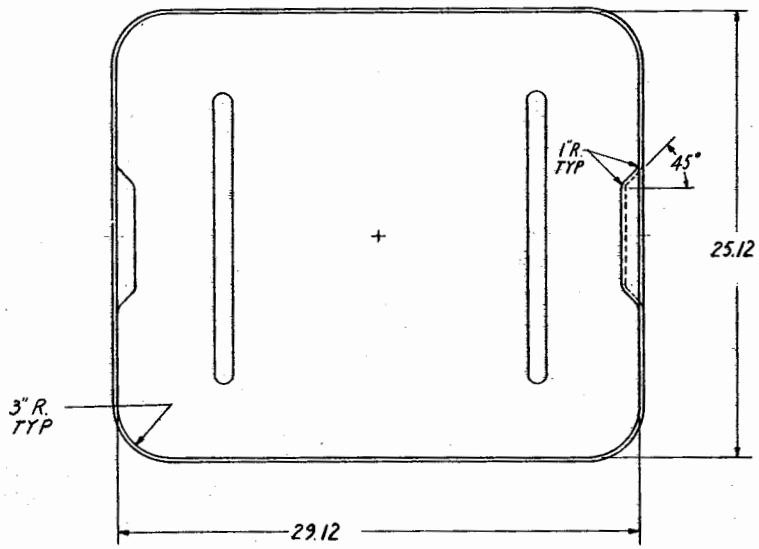

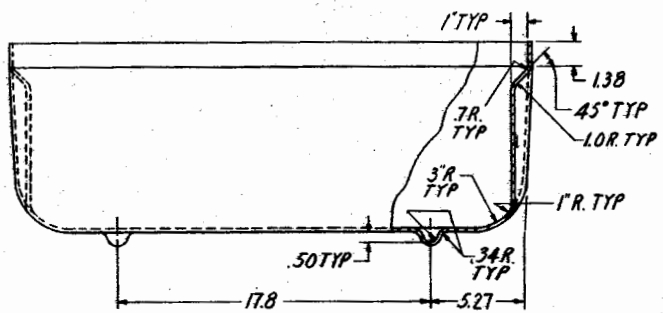

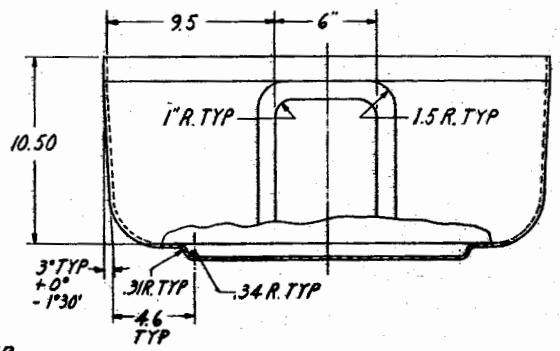


FIGURE 4 - SHELL, COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.