MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This amendment forms a part of Military Specification Sheet MIL-C-55302/65E, dated 26 December 1984, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1: Delete ".094" and substitute ".085 ±.015".

PAGE 3

FIGURE 1, detail C and D, add: .130 diameter dimension to short turning jackscrew.

PAGE 4

Note 5, delete and substitute: "Numbers indicating the first and last position in each row and every fourth contact position in between shall be marked on the side(s) of the connector. As an option to the above, numbers indicating every fourth cavity may be stamped on the side of the connector, with the exception that the number 1 contact shall be marked."

PAGE 5

FIGURE 2, delete and substitute new figure 2 as printed on page 2 of this amendment.

PAGE 6

Low insertion force contacts, last line: Delete "measured" and substitute "maximum".

Example of part number, type of contacts: Delete "S" and substitute " - " (a dash) for standard insertion force contacts. "L" will be inserted only when low insertion force contacts are desired.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - AS, TD
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC, OS
Air Force - 99

Agent:
DLA - EC


Preparing activity:
Army - CR

(Project 5935-3524-11)


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

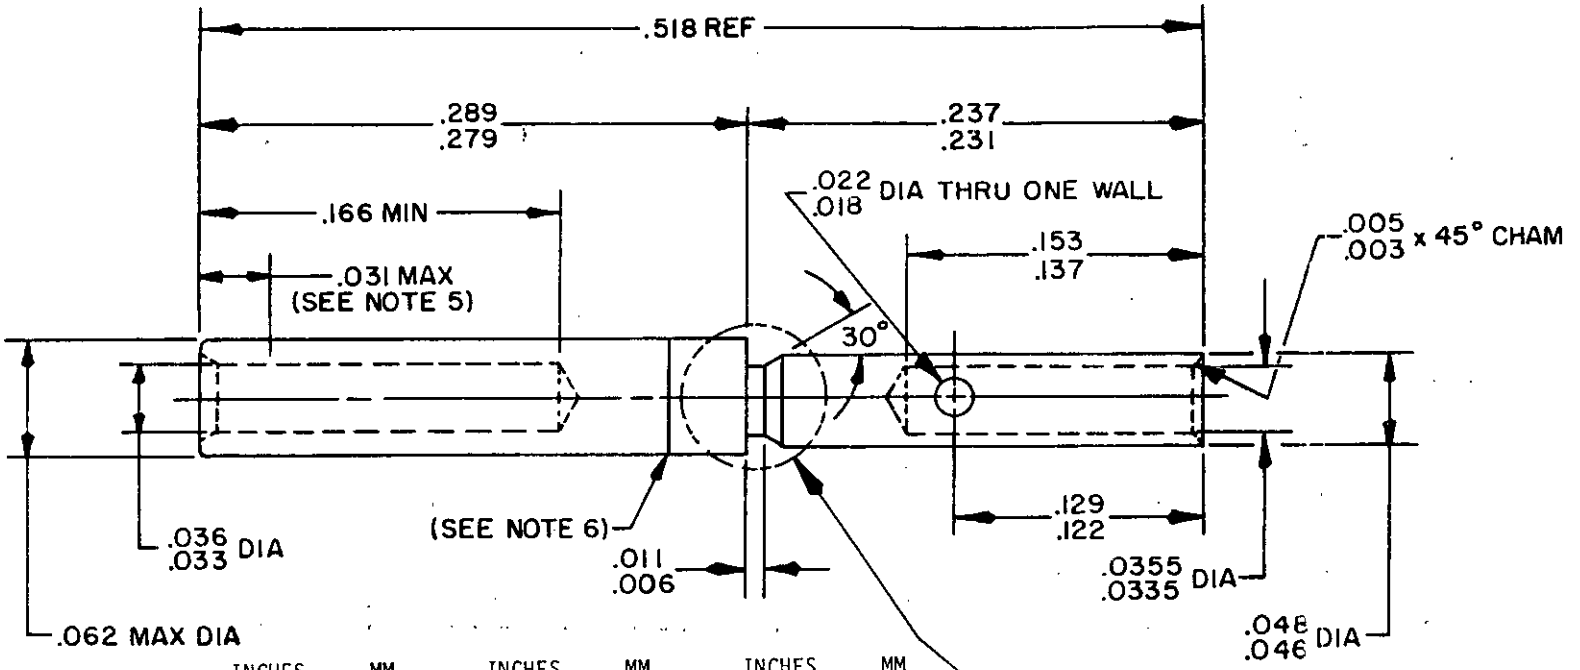

INCHES	MM	INCHES	MM	INCHES	MM
.002	0.05	.031	0.79	.129	3.28
.003	0.08	.033	0.84	.137	3.48
.004	0.10	.0335	0.851	.153	3.89
.005	0.13	.0355	0.902	.166	4.22
.006	0.15	.036	0.91	.231	5.87
.011	0.28	.046	1.17	.237	6.02
.018	0.46	.048	1.22	.279	7.09
.022	0.56	.062	1.57	.289	7.34
.029	0.74	.122	3.10	.518	13.16

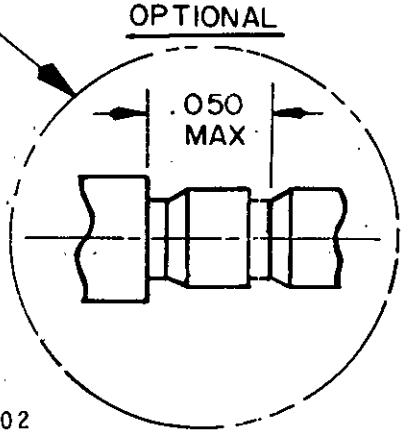

NOTES:
1. Dimensions are in inches.
2. Machined surfaces to be 63 microinches or less.
3. Remove all burrs and sharp edges .003 maximum.
4. All diameters to be concentric within .004 T.I.R.
5. Depth at which a square ended pin of .029 diameter first engages the socket contact spring.
6. Maximum gap .002 between hood and body.
7. Contact part numbers shall be M55302/65-01 for standard force and M55302/65-02 for low insertion force contracts.

FIGURE 2. Socket contact, crimp.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.