
FED. SUP CLASS 5307

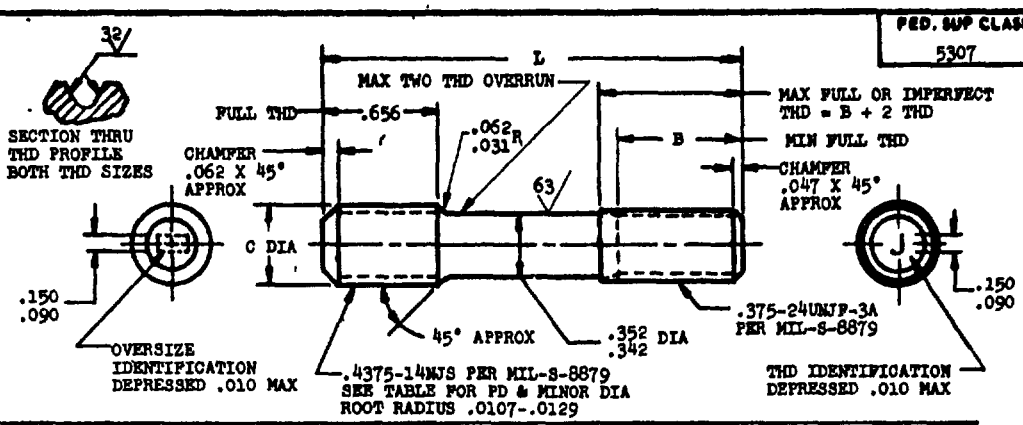

OVERSIZE IDENTIFICATION		STANDARD (·)	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.433 -.438	.433 -.438	.433 -.438	.442 -.447	.442 -.447
PD BEFORE PLATING		.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
PD AFTER PLATING		.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
PD LEAD THREAD		.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
MINOR DIA		.3558-.3616	.3588-.3646	.3618-.3676	.3648-.3706	.3678-.3736
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.344	.562	MS17296-011	MS17296-012	MS17296-013	MS17296-014	MS17296-015
1.406	.625	MS17296-016	MS17296-017	MS17296-018	MS17296-019	MS17296-020
1.469	.688	MS17296-021	MS17296-022	MS17296-023	MS17296-024	MS17296-025
1.531	.688	MS17296-026	MS17296-027	MS17296-028	MS17296-029	MS17296-030
1.594	.688	MS17296-031	MS17296-032	MS17296-033	MS17296-034	MS17296-035
1.656	.688	MS17296-036	MS17296-037	MS17296-038	MS17296-039	MS17296-040
1.719	.688	MS17296-041	MS17296-042	MS17296-043	MS17296-044	MS17296-045
1.750	.938	MS17296-046	MS17296-047	MS17296-048	MS17296-049	MS17296-050
1.781	.688	MS17296-051	MS17296-052	MS17296-053	MS17296-054	MS17296-055
1.844	.938	MS17296-056	MS17296-057	MS17296-058	MS17296-059	MS17296-060
1.906	.688	MS17296-061	MS17296-062	MS17296-063	MS17296-064	MS17296-065
2.031	.688	MS17296-066	MS17296-067	MS17296-068	MS17296-069	MS17296-070
2.094	.688	MS17296-071	MS17296-072	MS17296-073	MS17296-074	MS17296-075
2.156	.688	MS17296-076	MS17296-077	MS17296-078	MS17296-079	MS17296-080
2.219	.688	MS17296-081	MS17296-082	MS17296-083	MS17296-084	MS17296-085
2.281	.688	MS17296-086	MS17296-087	MS17296-088	MS17296-089	MS17296-090
2.344	.688	MS17296-091	MS17296-092	MS17296-093	MS17296-094	MS17296-095
2.406	.688	MS17296-096	MS17296-097	MS17296-098	MS17296-099	MS17296-100
2.531	.688	MS17296-101	MS17296-102	MS17296-103	MS17296-104	MS17296-105
2.656	.688	MS17296-106	MS17296-107	MS17296-108	MS17296-109	MS17296-110
2.781	.688	MS17296-111	MS17296-112	MS17296-113	MS17296-114	MS17296-115
2.906	.688	MS17296-116	MS17296-117	MS17296-118	MS17296-119	MS17296-120
3.031	.688	MS17296-121	MS17296-122	MS17296-123	MS17296-124	MS17296-125
3.156	.688	MS17296-126	MS17296-127	MS17296-128	MS17296-129	MS17296-130
3.281	.688	MS17296-131	MS17296-132	MS17296-133	MS17296-134	MS17296-135
3.406	.688	MS17296-136	MS17296-137	MS17296-138	MS17296-139	MS17296-140
3.531	.688	MS17296-141	MS17296-142	MS17296-143	MS17296-144	MS17296-145
3.656	.688	MS17296-146	MS17296-147	MS17296-148	MS17296-149	MS17296-150
3.781	.688	MS17296-151	MS17296-152	MS17296-153	MS17296-154	MS17296-155
3.906	.688	MS17296-156	MS17296-157	MS17296-158	MS17296-159	MS17296-160
4.031	.688	MS17296-161	MS17296-162	MS17296-163	MS17296-164	MS17296-165
4.156	.688	MS17296-166	MS17296-167	MS17296-168	MS17296-169	MS17296-170
4.281	.688	MS17296-171	MS17296-172	MS17296-173	MS17296-174	MS17296-175
4.406	.688	MS17296-176	MS17296-177	MS17296-178	MS17296-179	MS17296-180
4.531	.688	MS17296-181	MS17296-182	MS17296-183	MS17296-184	MS17296-185
4.656	.688	MS17296-186	MS17296-187	MS17296-188	MS17296-189	MS17296-190

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: STEEL AMS 6322.
HARDNESS: ROCKWELL C26-32
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: MIL-STD-10. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
MANUFACTURING SPECIFICATION: AMS 7456 EXCEPT THREADS AS NOTED ABOVE.
PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 7 September 1961 REVISED

P.A.	WEP	TITLE	MILITARY STANDARD
Other Cust	NONE	STUD-STEPPED, 1.5 DIA ENGAGEMENT, .4375-14 X .375-24 (MIL-S-8879 THREAD)	MS17296(WEP)
PROCUREMENT SPECIFICATION	NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:06Z
Check the source to verify that this is the current version before use.