

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENCE

FORM APPROVED
OMB NO 0704-0188

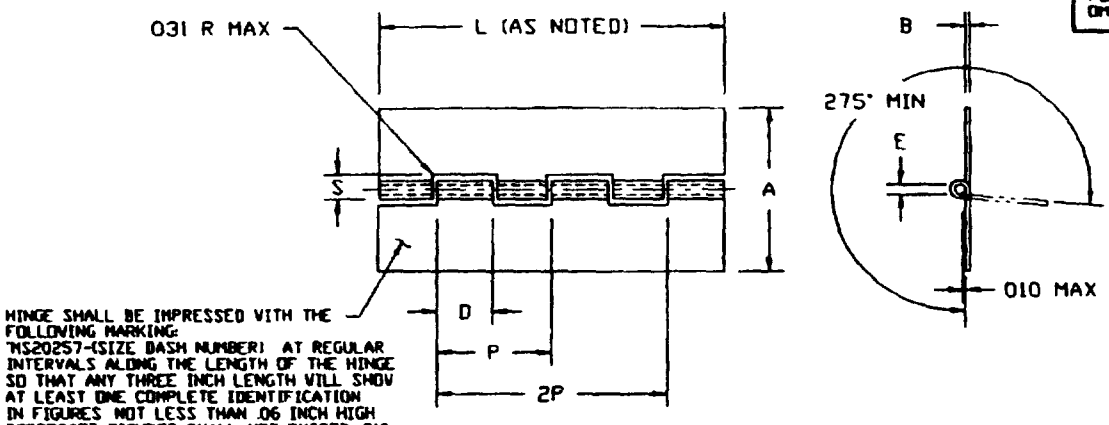


MINGE SHALL BE IMPRESSED WITH THE FOLLOWING MARKING: "MS20257-(SIZE DASH NUMBER)" AT REGULAR INTERVALS ALONG THE LENGTH OF THE HINGE SO THAT ANY THREE INCH LENGTH WILL SHOW AT LEAST ONE COMPLETE IDENTIFICATION IN FIGURES NOT LESS THAN .06 INCH HIGH DEPRESSED FIGURES SHALL NOT EXCEED .010 INCH IN DEPTH. DESIGNATION FOR ANODIZING AND LENGTH SHALL NOT BE INCLUDED IN THE MARKING.



(D) HALF HINGE (TYPE H)



(D) HALF HINGE (TYPE X) (d)



(D) HALF HINGE (TYPE Y) (d)

(D)

DASH NUMBER FOR COMPLETE HINGE (a)			A WIDTH (OPEN) ±.016	B THICKNESS		D LOOP +.001 -.008	E HOLE DIAMETER +.007 -.001		P PITCH (c)	PIN DIAMETER (REF) (e)		S SLOT DEPTH		STOCK LENGTH (b)	
ALUMINUM		CRES		AL ALLOY	CRES		AL ALLOY	CRES		AL 3/	CRES 4/	AL ALLOY	CRES	AL ALLOY	CRES
1/	2/														
-1	P1	C1	.750	.032	.031	.490	.066	.066	1.000	.063	.063	.169	.166	36	48
-2	P2	C2	1.062	.040	.037		.093	.093		.090	.090	.220	.213	72	
-3	P3	C3	1.250		.050			.121			.118		.278		
-4	P4	C4	1.500		.062								.314		
-5	P5	C5	2.000	.051				.183			.180	.253	.376		72
-6	P6	C6	2.000	.064		1.990	.183		4.047	.180		.382			

(a) COMPLETE HINGES ARE FURNISHED WITH A PIN OF THE SAME LENGTH

(b) SECOND DASH NUMBER INDICATES (L) EXPRESSED IN INCHES AND HUNDREDTHS NOT EXCEEDING STOCK LENGTH OF TABLE END LOOPS AND OR TANGS MUST NEVER EXCEED A FULL LOOP OR TANG AND BOTH ENDS MUST BE EQUAL WITHIN .020 INCH

(c) TOLERANCES MUST BE ±.008 ON EACH DIMENSION FOR P 2P 3P ETC AND SHALL NOT BE CUMULATIVE

(d) TYPES X AND Y HALF HINGES CAN BE MADE FROM TYPE H HALF HINGES BUT WILL NOT BE STOCKED OR PROCURED BY SERVICE ACTIVITIES

(e) HINGE PINS SHALL BE IN ACCORDANCE WITH MS20253 USE CADMIUM PLATED CORROSION RESISTANT STEEL PIN WITH ALUMINUM ALLOY HINGE USE PASSIVATED CORROSION RESISTANT STEEL PIN WITH CORROSION RESISTANT STEEL HINGE

(D)

1/ UNANODIZED ALUMINUM

2/ ANODIZED ALUMINUM

3/ FOR ALUMINUM ALLOY HINGE

4/ FOR CORROSION RESISTANT STEEL (CRES) HINGE

(D) DENOTES CHANGE

PREPARING ACTIVITY: NAVY - AS CUSTODIANS: ARMY- NAVY- AIR FORCE-99 DLA- REVIEW: AF-82 ARMY-MI DLA IS USER: PROJECT NUMBER 5340-2049	MILITARY SPECIFICATION SHEET TITLE HINGE CONTINUOUS	SPECIFICATION SHEET NUMBER MS20257 22 JUNE 1992 REV D SUPERSEDING MS20257 C 13 APR 84 AMSC - N/A FSC 5340
DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE DISTRIBUTION IS UNLIMITED		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENCE

FORM APPROVED
OMB NO 0704-0188

(D) REQUIREMENTS

1 MATERIAL AL ALLOY 5052 H24 OR H34 PER QQ-A-250/8
CORROSION RESISTANT STEEL PER ASTM A167 A176 A177 A240 A412 A666 AND A693 TYPE 301 302 OR 304

2 FINISH ALUMINUM ALLOY ANODIZED MIL-A-8625 TYPE II OR NONE DEPENDING ON CODING
CORROSION RESISTANT STEEL NONE

(D) NOTES:

1 REMOVE ALL BURRS AND SHARP EDGES

2 DIMENSIONS IN INCHES UNLESS OTHERVISE SPECIFIED TOLERANCES DECIMALS ± 010 ANGLES ±1/2

3 PART NUMBER ADD H X OR Y BEFORE FIRST DASH NO FOR HALF HINGE VITHOUT PIN
EXAMPLES OF PART NOS

MS20257-2-800 = COMPLETE HINGE AL ALLOY UNANODIZED 1062 VIDE x 8 00 LONG VITH COR RES STEEL PIN

MS20257P2-800 = COMPLETE HINGE AL ALLOY ANODIZED 1062 VIDE x 8 00 LONG VITH CADMIUM PLATED COR RES STEEL PIN

MS20257C2-850 = COMPLETE HINGE COR RES STEEL 1062 VIDE x 8 00 LONG VITH COR RES STEEL PIN

MS20257H2-800 = TYPE H HALF HINGE AL ALLOY UNANODIZED 1062 VIDE (OPEN VIDTH OF COMPLETE HINGE) x 8 00 LONG VITHOUT PIN

MS20257HP2-800 = TYPE H HALF HINGE AL ALLOY ANODIZED 1062 VIDE (OPEN VIDTH OF COMPLETE HINGE) x 8 00 LONG VITHOUT PIN

MS20257HC2-875 = TYPE H HALF HINGE COR RES STEEL 1062 VIDE (OPEN VIDTH OF COMPLETE HINGE) x 8 75 LONG VITHOUT PIN

(D) 4 IN EVENT OF A CONFLICT BETVEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

(D) 5 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THIS ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

(D) DENOTES CHANGE

PREPARING ACTIVITY NAVY - AS CUSTODIANS: ARMY- NAVY- AIR FORCE- 99 DLA- REVIEV AF-82 ARMY-MI DLA IS USER PROJECT NUMBER 5340-2049	MILITARY SPECIFICATION SHEET TITLE HINGE CONTINUOUS	SPECIFICATION SHEET NUMBER MS20257 22 JUNE 1992 REV D SUPERSEDING MS20257 C 13 APR ' AMSC - N/A FSC 5340
DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE DISTRIBUTION IS UNLIMITED		PAGE 2 OF 2

DD FORM 1 FAT 00 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.