
FED. SUP CLASS
4730

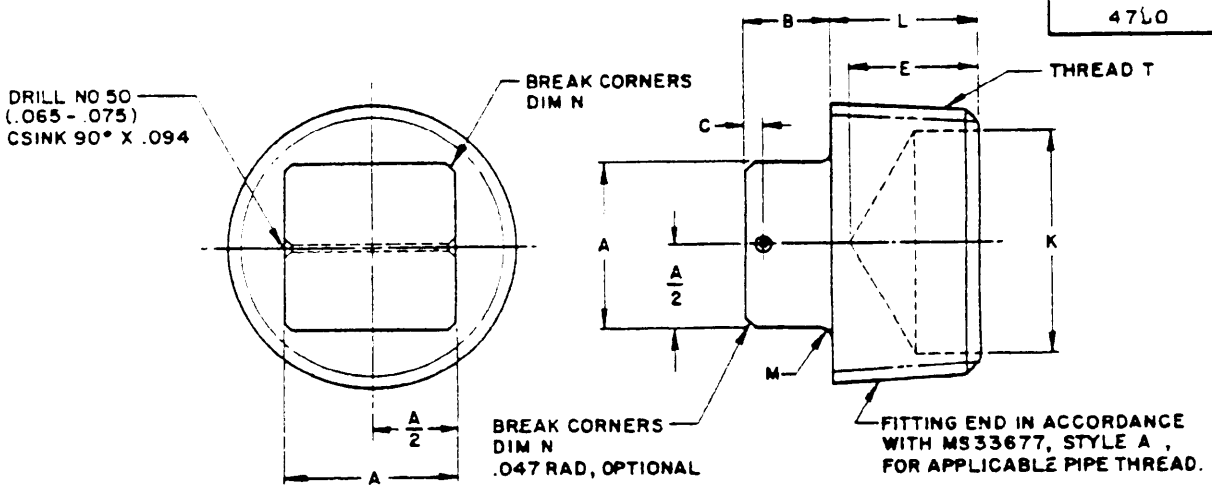

DASH NO	THREAD T NPT	A +.002 -.010	B	C	E MAX	K MAX DIA	L	M RAD	N MAX
0	1/16-27	.188	.188	.094			.312	.031	.010
1	1/8 -27	.281	.250	.125			.328	.062	
2	1/4 -18	.375	.281				.484		
3	3/8 -18	.448	.312		.359	.375			
4	1/2 -14	.563	.375		.500	.531	.625		
6	3/4 -14	.625	.438			.719	.641		
8	1 -11-1/2	.813	.500		.656	.938	.797		.047
10	1-1/4 -11-1/2	.938	.562		.672	1.250	.828		
12	1-1/2 -11-1/2	1.125	.625			1.469			
16	2 -11-1/2	1.313	.688		.688	1.906	.859		
20	2-1/2 - 8	1.500	.750		1.125	2.031	1.297		

APPROVED 10 JAN 57 REVISED (A) 24 MAY 57 (B) 10 FEB 67 (C) 25 FEB 77 (D) 16 JUN 78 (E) 21 MAR 79 (F) 2 SEP 82 (G) 19 JUL 84

Review activities: ARMY - ME, MI, GL
DLA - CS

User activities: ARMY - AV

This military standard is approved by the Department AND AGENCIES OF THE DEPARTMENT OF DEFENSE. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AIR FORCE - 82 Other Cust ARMY - AR NAVY - AS AIR FORCE - 99	TITLE PLUG, PIPE	MILITARY STANDARD MS 20913
PROCUREMENT SPECIFICATION MIL - F - 5509	SUPERSEDES: AN913	SHEET 1 OF 2

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 4730-0608 19 Jul

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MATERIAL: ALUMINUM ALLOY; COPPER ALLOY; STEEL, CORROSION RESISTANT STEEL (CRES).
(SEE PROCUREMENT SPECIFICATION).
FINISH. SEE PROCUREMENT SPECIFICATION.
NO CODE LETTER IN PART NUMBER FOR COPPER ALLOY.
ADD D AFTER DASH NO. FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD S AFTER DASH NO. FOR STEEL.
ADD J AFTER DASH NO. FOR CRES, TYPE 304.
ADD K AFTER DASH NO. FOR CRES, TYPE 316.
ADD W AFTER DASH NO. FOR 7075-T73 ALUMINUM ALLOY.
EXAMPLE OF PART NUMBERS:
MS20913-6 - PLUG, 3/4 PIPE THREAD, COPPER ALLOY.
MS20913-6D - PLUG, 3/4 PIPE THREAD, ALUMINUM ALLOY (EXCEPT 7075-T73).
MS20913-6J - PLUG, 3/4 PIPE THREAD, CRES, TYPE 304.
MS20913-6K - PLUG, 3/4 PIPE THREAD, CRES, TYPE 316.
MS20913-6S - PLUG, 3/4 PIPE THREAD, STEEL.
MS20913-6W - PLUG, 3/4 PIPE THREAD, 7075-T73 ALUMINUM ALLOY.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
AT OPTION OF MANUFACTURER, THE DASH 0 AND DASH 1 SIZES MAY BE FURNISHED WITHOUT MARKING.
(G) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016, ANGLES ±5°.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 10 JAN 87 REVISED (E) FOR CHANGES SEE PAGES 1 & 2. 21 MAR 79 (F) 2 SEP 82 (G)

Review activities: ARMY - ME, MI, GL User activities: ARMY - AV
DLA - CS

This military standard is approved by the Department AND AGENCIES OF THE DEPARTMENT OF DEFENSE. Suggestions for all new engineering and design applications and for revisions also should be made from this document.

P.A. AIR FORCE - 82 Other Cust ARMY - AR NAVY - AS AIR FORCE - 99	TITLE PLUG, PIPE	MILITARY STANDARD MS20913
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES: AN913	SHEET 2 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 4730-0608

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.