FED. SUP CLASS
5930

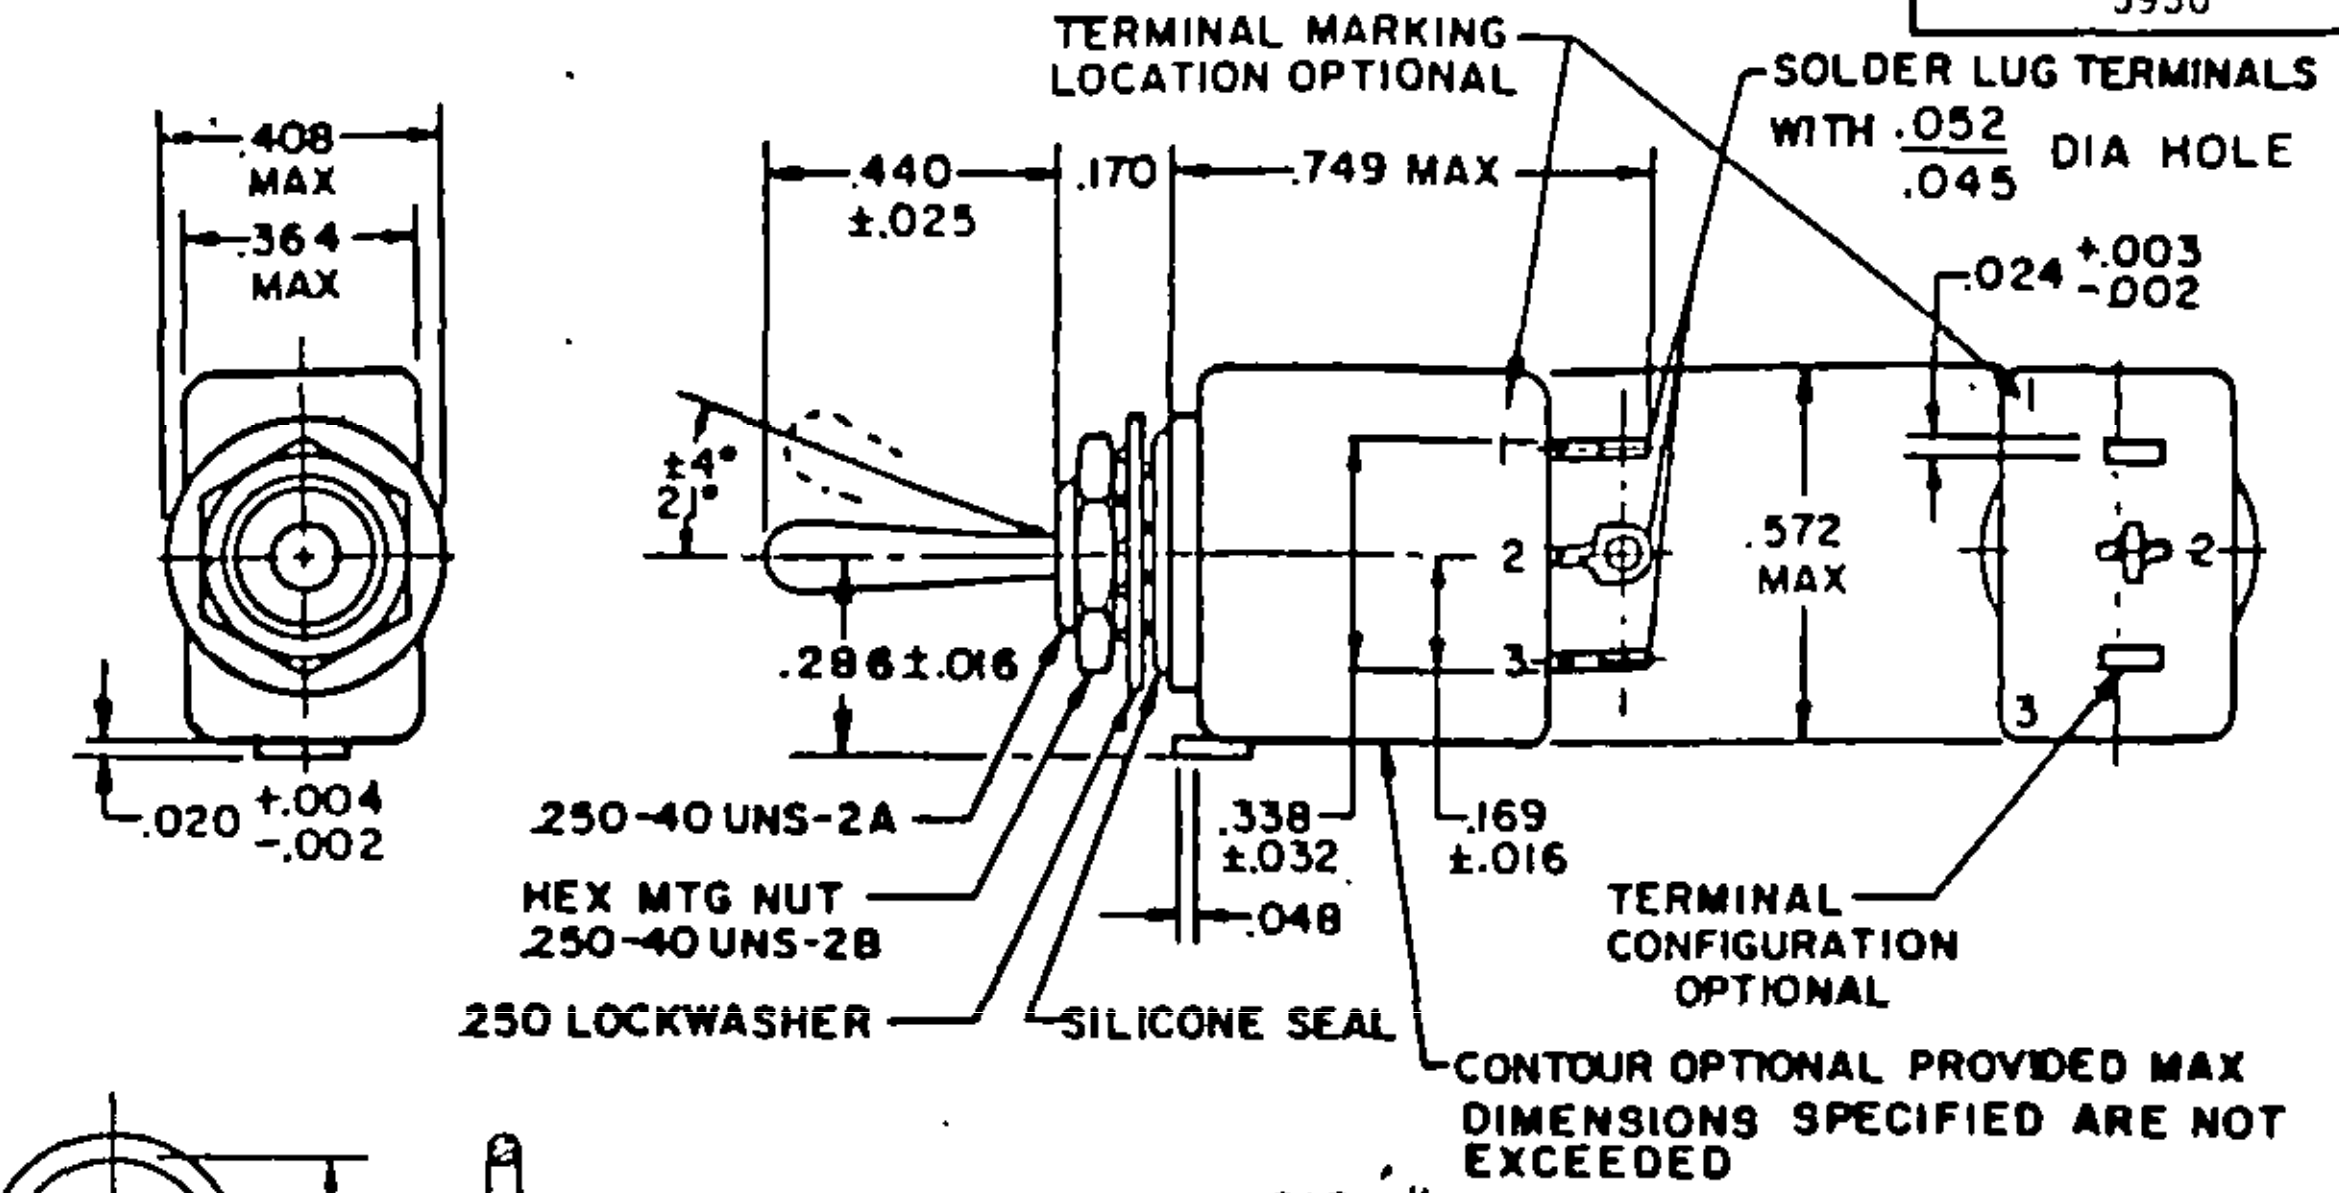

.408 MAX
.364 MAX
.020 +.004 -.002
.440 ±.025
.170
.749 MAX
TERMINAL MARKING LOCATION OPTIONAL
SOLDER LUG TERMINALS WITH .052/.045 DIA HOLE
.024 +.003 -.002
±4°
21°
.286±.016
2
3
1
.572 MAX
.250-40 UNS-2A
HEX MTG NUT .250-40 UNS-2B
.250 LOCKWASHER
SILICONE SEAL
.338 ±.032
.048
.169 ±.016
TERMINAL CONFIGURATION OPTIONAL
CONTOUR OPTIONAL PROVIDED MAX DIMENSIONS SPECIFIED ARE NOT EXCEEDED

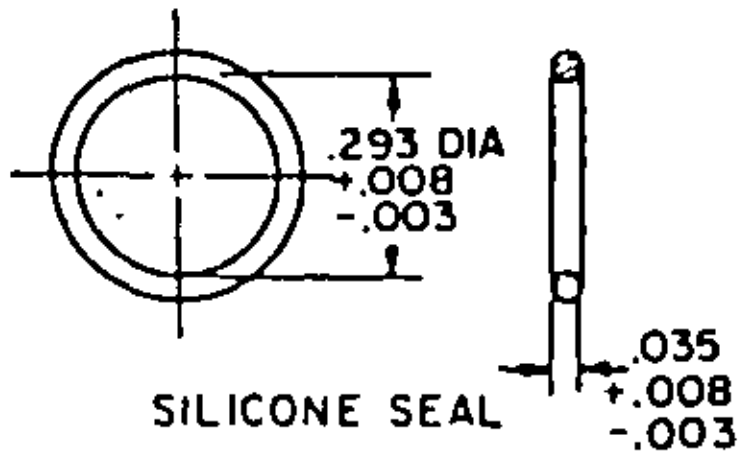

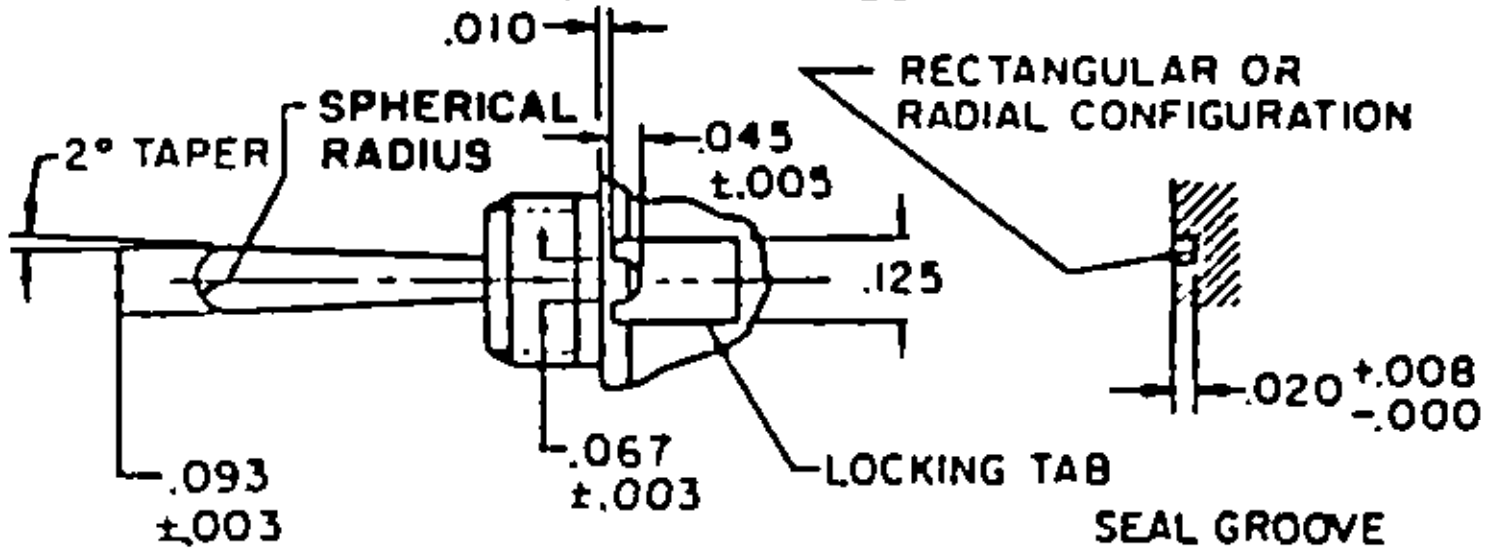

Detail requirements:

MS dash no. 1/	Circuit made between terminals as indicated with toggle lever in these positions: (a)			Current capacity in amperes						Life low current level switching 5 mV
	Opposite locking tab side	Center position	Locking tab side	Resistive load			Inductive load			
				28 volts dc	115 volts		28 volts DC	115 volts		
					60 Hertz AC	400 Hertz AC		60 Hertz AC	400 Hertz AC	
-321	None	(2-3) on	1-2 mom-on	5	2	3	(b) 1	1	2	(c) 25 µA

(a) Direction of movement of internal mechanism is opposite to the direction of the toggle movement.
(b) With time constant of .020 ±.002 seconds.
(c) *Contact resistance not to exceed 50Ω during life, low current level switching*

1/ Delayed action of the switch toggle lever may cause circuit to close or open before snap action mechanism trips.

Ⓗ CANCELLED AFTER 11 Jan 1989 USE MS24655-321

Ⓗ Denotes change

User activities: Army - MI
Navy -
Air Force -

Review activities: Army - AR, AV
Navy - EC
Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 17 Mar 72
REVISED Ⓕ 10 Dec 81 Ⓖ 18 Oct 1985 Ⓗ 11 Jan 1989

P.A AF-85

Other Cust
ARMY-ER
NAVY-AS

International interest:

TITLE
SWITCH, TOGGLE, POSITIVE BREAK,
SPECIAL CIRCUIT, MINIATURE, TOGGLE
SEALED, SOLDER LUG, SINGLE POLE,
.250 MOUNTING BUSHING

MILITARY STANDARD

MS 21350

Procurement Specification
MIL-S-8834

SUPERSEDES:
MS0021350 (USAF)

PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.

AMSC N/A

Distribution Statement A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
5930

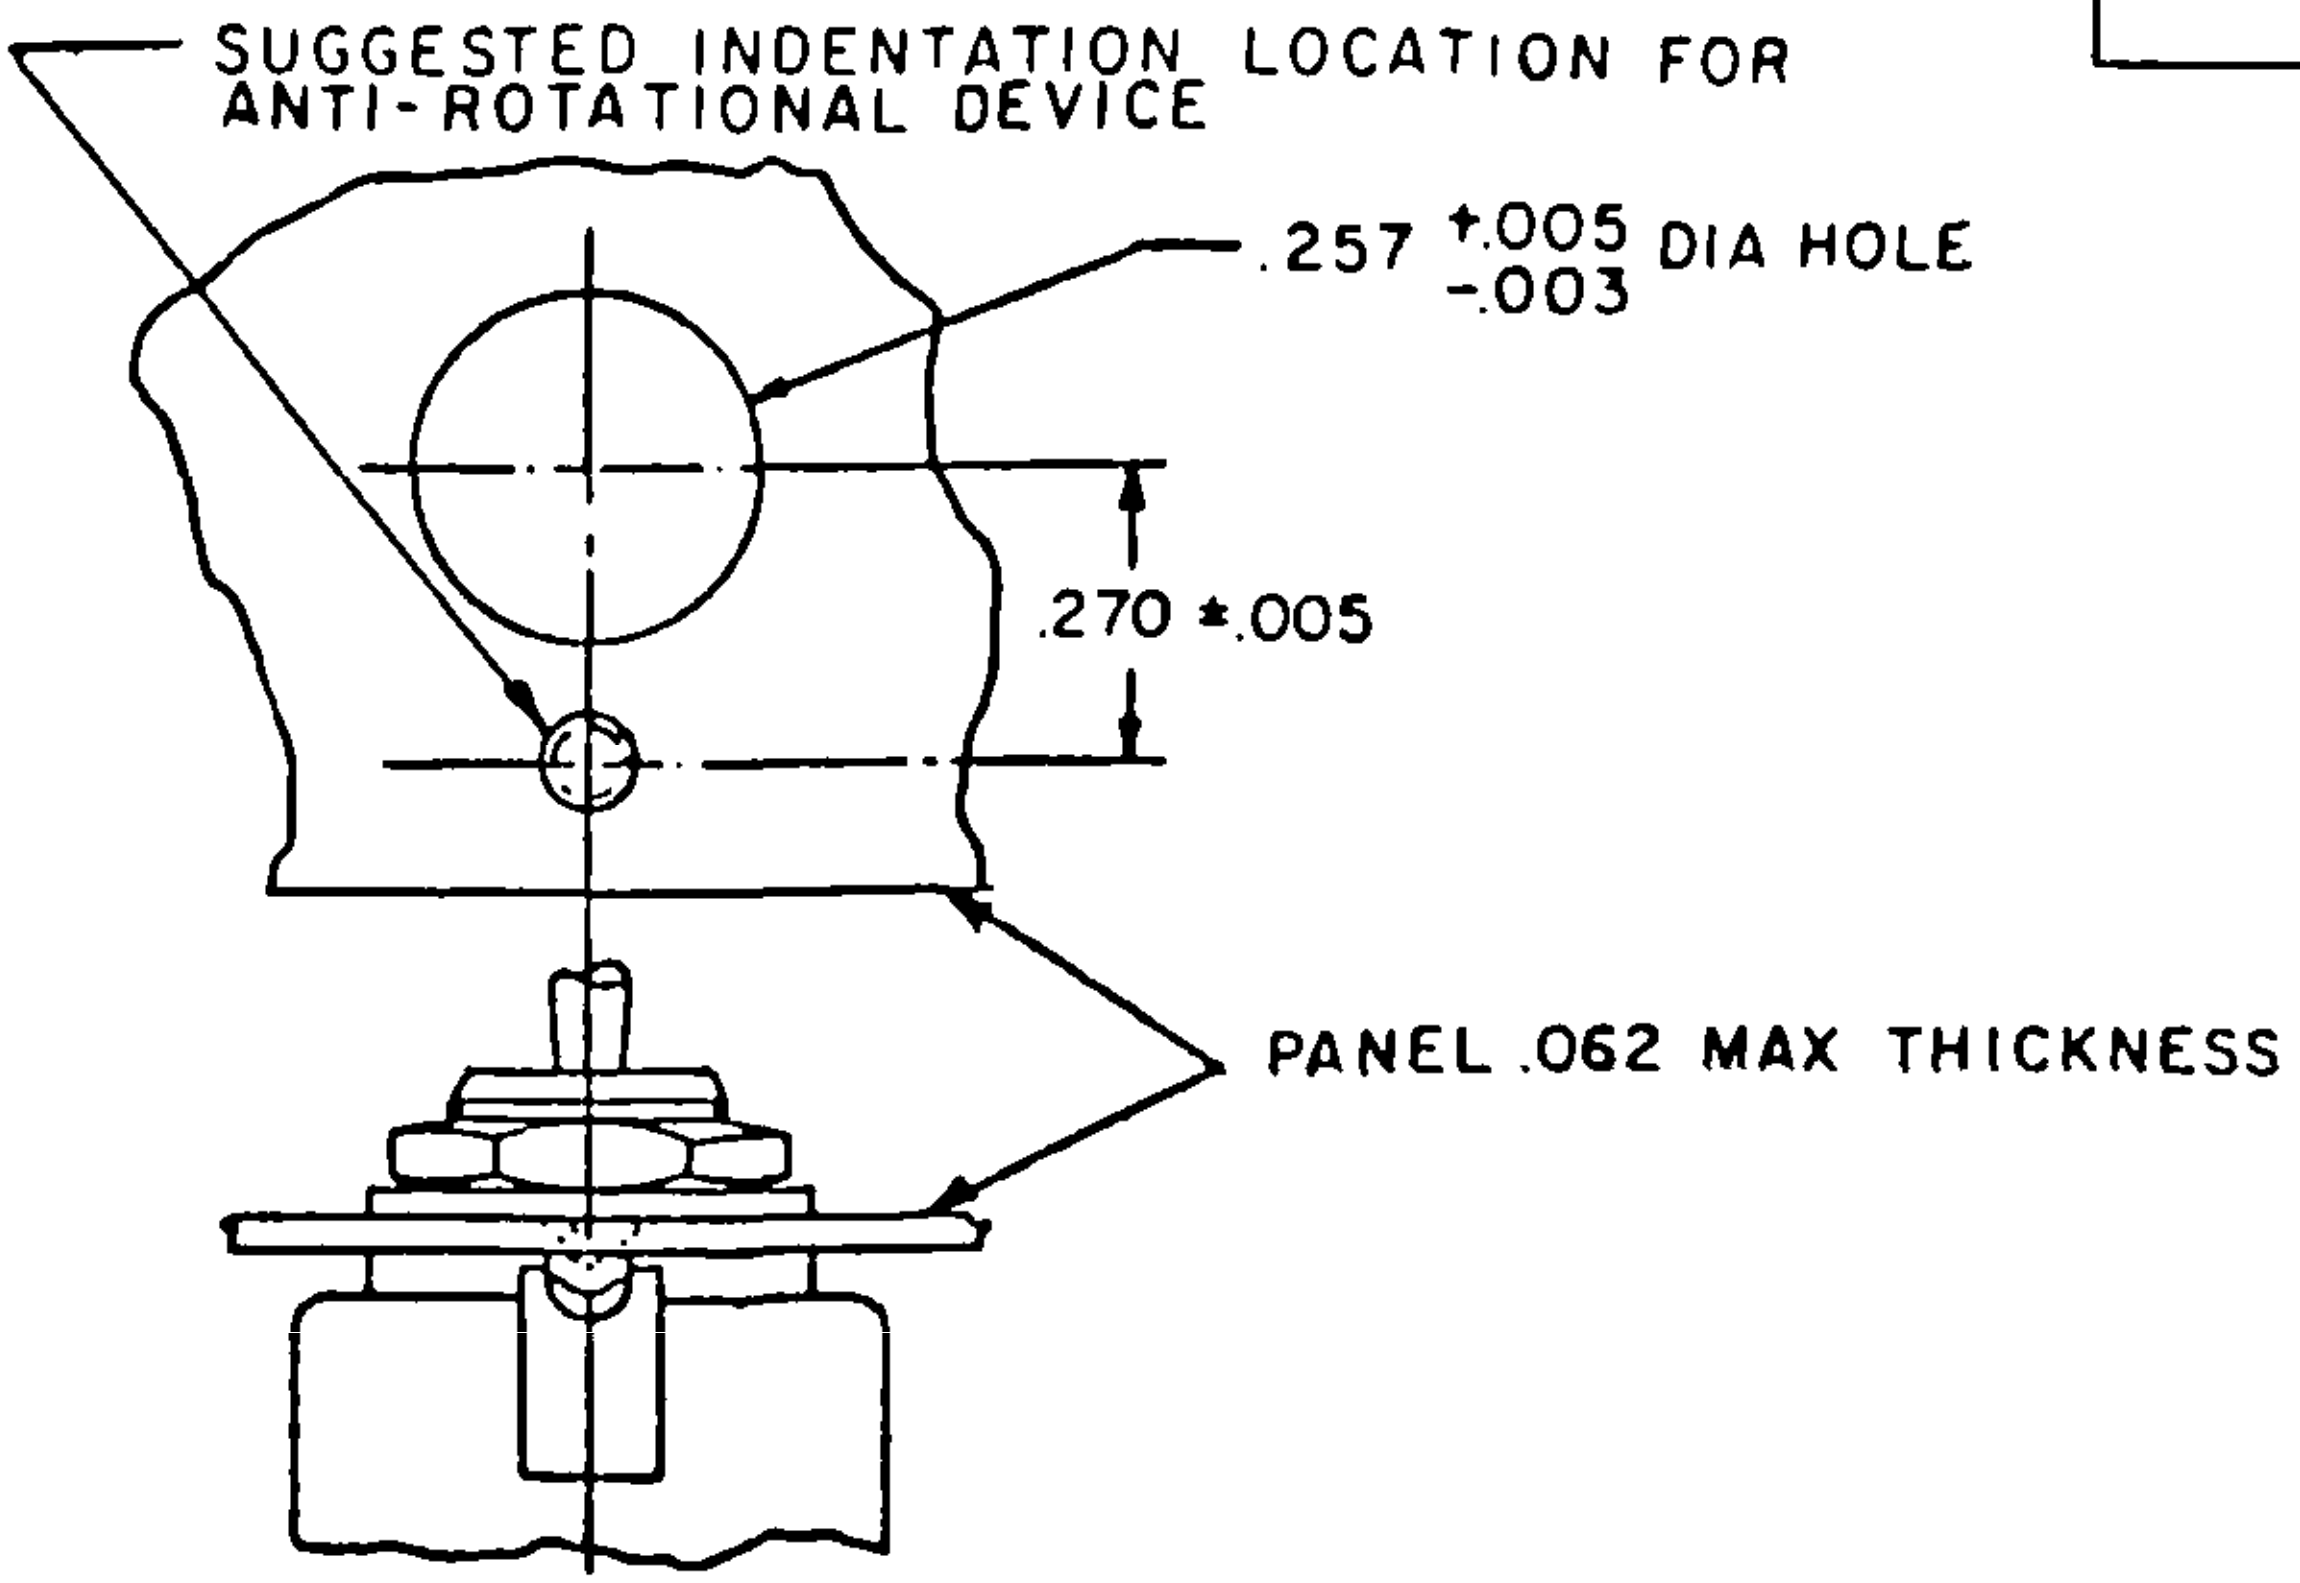
SUGGESTED INDENTATION LOCATION FOR ANTI-ROTATIONAL DEVICE
.257 +.005 -.003 DIA HOLE
.270 ±.005
PANEL .062 MAX THICKNESS

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.020	0.51	.052	1.32	.257	6.53
.003	0.08	.024	0.61	.062	1.57	.270	6.86
.004	0.10	.025	0.64	.063	1.60	.286	7.26
.005	0.13	.030	0.76	.067	1.70	.293	7.44
.008	0.20	.031	0.79	.093	2.36	.338	8.59
.010	0.25	.032	0.81	.125	3.18	.408	10.36
.012	0.30	.035	0.89	.169	4.29	.440	11.18
.014	0.36	.045	1.14	.170	4.32	.556	14.12
.016	0.41	.048	1.22	.250	6.35	.572	14.53
					.749	19.02	

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are ±.010 (0.25 mm) on decimals and ±.5° on angles.
4. For hardware detail specifications see appendix of MIL-S-8834.
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. Shock: Method I and Method II (high impact). The switch shall be electrically and mechanically operative at the conclusion of the test, and there shall be no mechanical transfer during the test.
8. Suitable for mounting of panels of .062 (1.57 mm) maximum thickness.
9. Weight: .0143 pound maximum (6.5 grams).
10. Strength of actuator: Lever pivot and lever stop 6 pounds.
11. Strength of terminal: 5 pounds normal to mounting plane and 2 pounds in other planes.
12. Dielectric withstanding voltage: 1,200 V rms at sea level.
13. Altitude: 50,000 feet.
14. 115 V ac, 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

APPROVED 17 Mar 72
REVISED Ⓖ FOR CHANGE SEE PAGE 2 Ⓗ FOR CHANGE SEE PAGE 1

User activities: Army - MI
Navy -
Air Force -

Review activities: Army - AR, AV
Navy - EC
Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A AF-85

Other Cust
Army - ER
Navy - AS

International interest:

TITLE
SWITCH, TOGGLE, POSITIVE BREAK, SPECIAL CIRCUIT, MINIATURE, TOGGLE SEALED, SOLDER LUG, SINGLE POLE, .250 MOUNTING BUSHING

MILITARY STANDARD

MS 21350

Procurement Specification
MIL-S-8834

SUPERSEDES:
MS0021350(USAF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.