
FED. SUP CLASS
5305

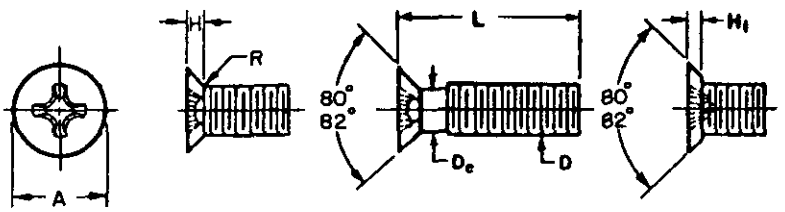

FULL HEAD UNDERCUT HEAD

				2 (.086) - 56UNC-2A		4 (.112) - 40UNC-2A		6 (.138) - 32UNC-2A		8 (.164) - 32UNC-2A	
	THREAD	D									
	UNTHREADED DIA	D_e	MAX	.0860		.1120		.1380		.1640	
			MIN	.0717		.0925		.1141		.1399	
	HEAD DIA	A	MAX SHARP	.172		.225		.279		.332	
			MIN SHARP	.156		.207		.257		.308	
			ABS MIN	.150		.200		.249		.300	
	RADIUS	R	MAX	.035		.050		.062		.062	
FULL HEAD:	HEAD HEIGHT	H	MAX	.051		.067		.083		.100	
			MIN	.040		.055		.069		.084	
UNDERCUT HEAD:	HEAD HEIGHT	H_1	MAX	.036		.047		.058		.070	
			MIN	.028		.039		.048		.059	
	DRIVER SIZE			1		1		2		2	
	LENGTH	L	TOLERANCE	DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/8			1		10		21		36	
	3/16			2		11		22		37	
	1/4			3		12		23		38	
	5/16			4		13		24		39	
	3/8		+0	5		14		25		40	
	7/16		-1/32	6		15		26		41	
	1/2			7		16		27		42	
	5/8			8		17		28		43	
	3/4			9		18		29		44	
	7/8					19		30		45	
	1					20		31		46	
	1-1/4		+0					32		47	
	1-1/2		-1/16					33		48	
	1-3/4							34		49	
	2							35		50	

MATERIAL: Carbon Steel, FED-STD-66, 55,000 PSI Minimum Ultimate Tensile Strength.

FINISH: Cadmium Plated, Specification QQ-P-416, Type II, Class 3.

THREADS: The Threads shall be in accordance with Screw Threads Standards for Federal Services, Handbook H-28.

EXAMPLE OF PART NUMBER: MS24583-1 = Screw, Carbon Steel, Cadmium plated, 2-56UNC-2A, 1/8 long.
MS24583-51 = Screw, Carbon Steel, Cadmium plated, 10-32UNF-2A, 1/4 long.

NOTES: (1) Recess shall conform with Standard MS9006 and Type III, Design I of Procurement Specification. In case of conflict with respect to recess dimensions between Specification FF-S-92 and Standard MS9006, Standard MS9006 shall govern.
(2) Referenced documents shall be of the issue in effect on date of invitations for bid.
(3) This standard takes precedence over documents referenced herein.
(4) Sizes above dotted line have undercut head.
(5) All dimensions are in inches.

INTERCHANGEABILITY RELATIONSHIP - MS24583 screws can universally replace MS35192 and MS35193 screws of like thread and length; but the MS35192 and MS35193 screws cannot replace MS24583 screws.

(A) CANCELLED AFTER 21 Dec 62. USE MS35190 AND MS35191.

(A) INTERCHANGEABILITY RELATIONSHIP - MS35190 and MS35191 parts can replace the cancelled MS24583 parts of the same thread size and screw length. The cancelled MS24583 parts cannot always replace the MS35190 and MS35191 parts and should be used until existing stock is depleted. Use only the superseding MS35190 and MS35191 parts of the same thread size and screw length for design and replacement.

APPROVED 5 Feb 60 REVISED (A) 21 Dec 62

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

TH... ...MITED COO... ...NATED MILITARY STANDARD DRAWING HAS BEEN PREPARED BY THE AIR FORCE BASED UPON CURRENTLY AVAILABLE TECHNICAL INFORMATION, BUT IT HAS NOT BEEN APPROVED FOR PROMULGATION AS A REVISION OF MILITARY STANDARD SHEETS. IT IS SUBJECT TO MODIFICATION. HOWEVER, PENDING ITS PROMULGATION AS A COORDINATED MILITARY STANDARD DRAWING, IT MAY BE USED IN PROCUREMENT.

P.A. USAF Other Cust	TITLE: SCREW, MACHINE-FLAT COUNTERSUNK HEAD, CROSS-RECESSED, CARBON STEEL, CADMIUM PLATED	MILITARY STANDARD MS24583(USAF)
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

				10 (.190) - 32UNF-2A		1/4- 28UNF-2A		5/16- 24UNF-2A		3/8- 24UNF-2A	
	THREAD	D									
	UNTHREADED DIA	D	MAX	.1900		.2500		.3125		.3750	
			MIN	.1658		.2225		.2806		.3430	
	HEAD DIA	A	MAX SHARP	.385		.507		.635		.762	
			MIN SHARP	.359		.477		.600		.722	
			ABS MIN	.348		.462		.581		.700	
	RADIUS	R	MAX	.062		.071		.083		.083	
FULL HEAD:	HEAD HEIGHT	H	MAX	.116		.153		.191		.230	
			MIN	.098		.131		.165		.200	
UNDERCUT HEAD:	HEAD HEIGHT	H1	MAX	.091		.107		.132		.161	
			MIN	.069		.092		.116		.140	
	DRIVER SIZE			2		3		4		4	
	LENGTH	L	TOLERANCE	DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/4			51							
	5/16			52		66					
	3/8		+0 -1/32	53		67		80			
	7/16			54		68		81			
	1/2			55		69		82		93	
	5/8			56		70		83		94	
	3/4			57		71		84		95	
	7/8			58		72		85		96	
	1			59		73		86		97	
	1-1/4			60		74		87		98	
	1-1/2		+0 -1/16	61		75		88		99	
	1-3/4			62		76		89		100	
	2			63		77		90		101	
MINIMUM COMPLETE THREAD LENGTH OF 1-3/4	2-1/4			64		78		91		102	
	2-1/2		+0 -3/32	65		79		92		103	
	2-3/4									104	
	3									105	

APPROVED 5 Feb 60 REVISED 21 Dec 62

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

THIS LIMITED COORDINATED MILITARY STANDARD DRAWING HAS BEEN PREPARED BY THE AIR FORCE BASED UPON CURRENTLY AVAILABLE TECHNICAL INFORMATION, BUT IT HAS NOT BEEN APPROVED FOR PROMULGATION AS A REVISION OF MILITARY STANDARD SHEETS. IT IS SUBJECT TO MODIFICATION. HOWEVER, PENDING ITS PROMULGATION AS A COORDINATED MILITARY STANDARD DRAWING, IT MAY BE USED IN PROCUREMENT.

P.A. USAF Other Cust	TITLE: SCREW, MACHINE-FLAT COUNTERSUNK HEAD, CROSS-RECESSED, CARBON STEEL, CADMIUM PLATED	MILITARY STANDARD MS24583(USAF)
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:57Z
Check the source to verify that this is the current version before use.

GPO 826641