
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities — Army - Navy - Air Force -


Review activities — Army - Navy - Air Force - 99

FED. SUP CLASS 5930

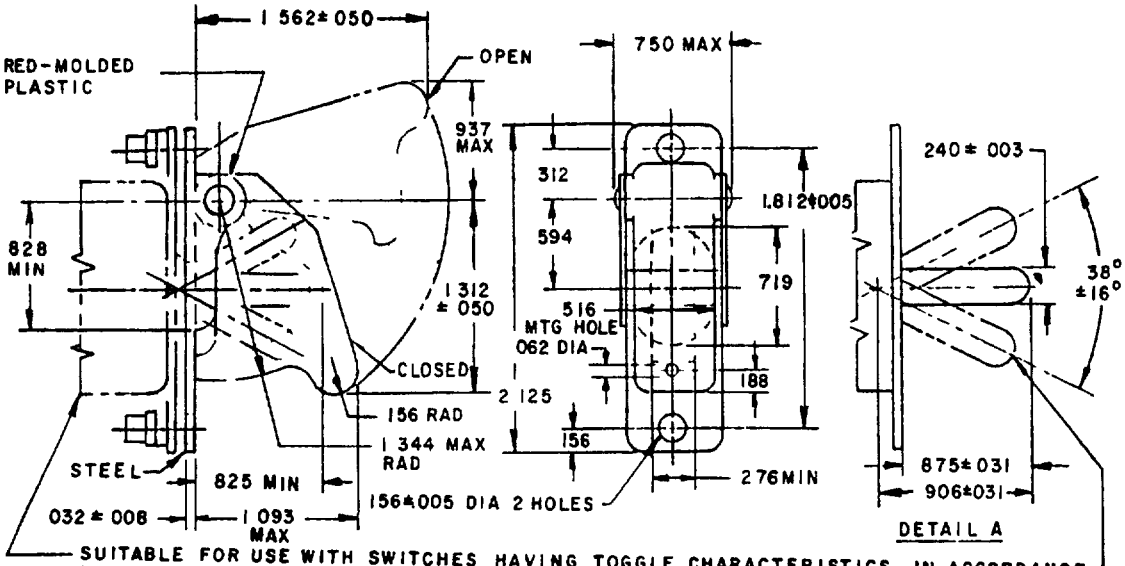

SUITABLE FOR USE WITH SWITCHES HAVING TOGGLE CHARACTERISTICS IN ACCORDANCE WITH DETAIL A (3 HOLE MOUNTING)

-1

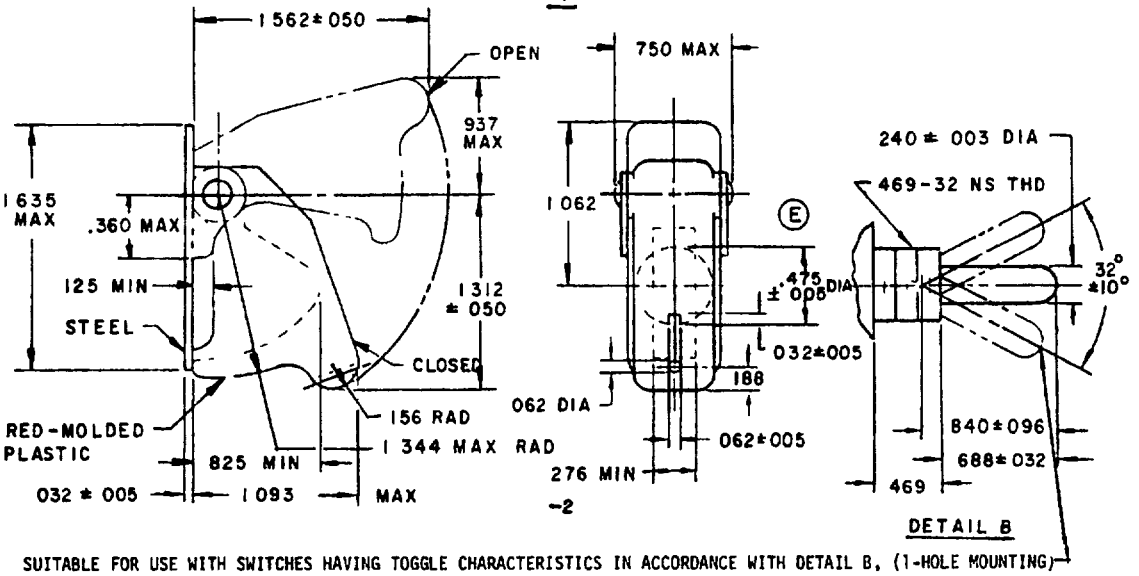

-2

SUITABLE FOR USE WITH SWITCHES HAVING TOGGLE CHARACTERISTICS IN ACCORDANCE WITH DETAIL B, (1-HOLE MOUNTING)

DASH NO	OPER FORCE	TYPE	PANEL THICKNESS (REF)	REMARKS
-1 1/	1.0 to 2 5 LBS	3-HOLE MOUNTING	.050 TO .081	
-2				IDENTICAL TO -2, EXCEPT KEYWAY IS ROTATED 180°
-3		1-HOLE MOUNTING	050 TO 248	

1/ INACTIVE FOR NEW DESIGN - USE FOR REPLACEMENT ONLY

Ⓔ denotes changes

REVISED (A) 28 Oct 60 (B) 5 Aug 71 (C) 5 Jul 79 (D) 30 Sep 81 (E) 20 DEC 82

APPROVED 12 Aug 57

P A USAF - 85 Other Cust NAVY - AS ARMY - ER	International interest	TITLE GUARD, SWITCH, 3 POSITION	MILITARY STANDARD MS25214
Procurement Specification MIL-G-7703		SUPERSEDES MS25214-1 SUPERSEDES NAS-532-1 MS25214-2 SUPERSEDES NAS-532-2	PAGE 1 OF 2

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.

5930-1226-3

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

User activities: Army - Navy - Air Force -

Review activities: Army - Navy - Air Force - 99

FED SUP CLASS
5930

(E)

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.240	6.10	.828	21.03
.005	.13	.248	6.30	.840	21.34
.008	.20	.276	7.01	.875	22.22
.031	.79	.312	7.92	.906	23.01
.032	.81	.360	9.14	.937	23.80
.050	1.27	.469	11.91	1.062	26.97
.062	1.57	.516	13.11	1.093	27.76
.081	2.06	.594	15.09	1.312	33.32
.096	2.44	.688	17.47	1.344	34.14
.125	3.18	.719	18.26	1.562	39.67
.156	3.96	.750	19.05	1.635	41.53
.188	4.77	.825	20.95	1.812	46.02
				2.125	53.98

NOTES.
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 on decimals.
3. Material. Plastic, molded, red color number 11136, Federal Standard 595. Steel, commercial, shall be smooth and free from burrs.
(E) 4. Finish: Zinc plate, QQ-Z-325, type III, or cadmium plate, QQ-P-416, type III, with optional supplementary treatment per MIL-C-8514 or DOD-P-15328, black enamel, lusterless, color number 37038 or semigloss, color number 27038, Federal Standard 595 or equivalent.
5. Opening the guard shall not move the switch contacts.
6. Closing the guard shall place the switch lever in the center position from either the up or down position.
7. The guard shall remain in either the open or closed position.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED

REVISED (E) FOR CHGS SEE PGS 1 & 2

P.A AF-85 Other Cust ARMY-ER NAVY-AS	International interest	TITLE GUARD, SWITCH, 3 POSITION	MILITARY STANDARD MS 25214
Procurement Specification MIL-G-7703		SUPERSEDES MS25214-1 SUPERSEDES NAS-532-1 MS25214-2 SUPERSEDES NAS-532-2	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Superseding the previous edition of this form is obsolete.)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.