INCH-POUND

MS25329N
25 August 2020
SUPERSEDING
MS25329M
27 November 2003

DETAIL SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 6 PDT, 5 AMPERES, TYPE I, SOCKET MOUNTED, HERMETICALLY SEALED

INACTIVE FOR NEW DESIGN AFTER 30 SEPTEMBER 1987. NO SUPERSEDING SPECIFICATION.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-PRF-6106.


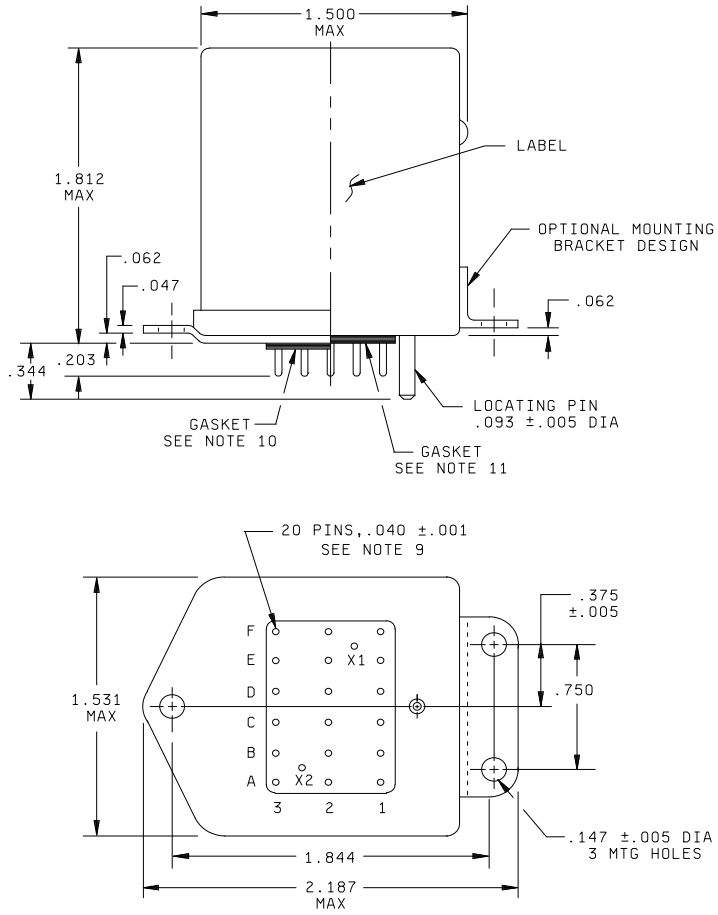


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

MS25329N

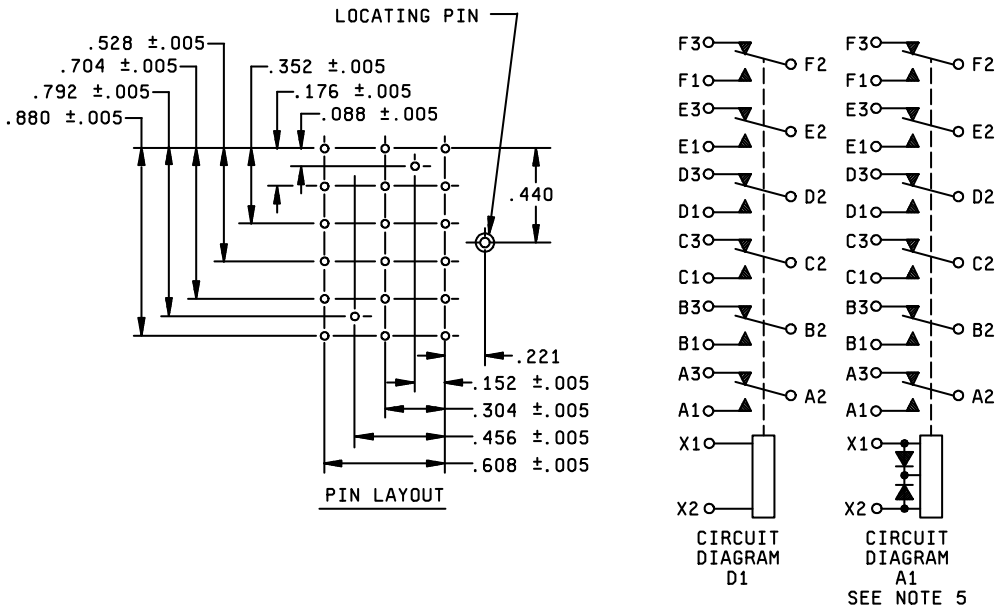

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.176	4.47	.704	17.88
.005	0.13	.203	5.16	.750	19.05
.008	0.20	.221	5.61	.792	20.12
.040	1.02	.304	7.72	.880	22.35
.047	1.19	.344	8.74	1.500	38.10
.062	1.57	.352	8.94	1.531	38.89
.088	2.24	.375	9.53	1.812	46.02
.093	2.36	.458	11.63	1.844	46.84
.147	3.73	.528	13.41	2.187	55.55
.152	3.86	.608	15.44		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Terminal numbers shall not appear on relay headers. There shall be affixed to the relay a suitable legible circuit diagram that positively and permanently identifies each terminal location diagram that positively and permanently identifies each terminal location specified herein.
5. The use of diodes on ac relays is optional. Actual application must be shown on label.
6. In the event of conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.
7. Referenced Government documents of the issue listed in Assist Online (https://assist.dla.mil/) or Assist Quick Search (https://quicksearch.dla.mil) specified in the solicitation form a part of this specification to the extent specified herein.
8. Pins to be perpendicular to header surface within one degree.
9. Socket pin terminals shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold-plated contacts. Terminals shall be gold plated. One system for gold plating that may be used is ASTM B488, type 3, class 1.25 with a nickel underplate of 50 to 150 microinches thick. The gold plating system shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

10. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have thickness .075, recessed .047 in to bracket. Gasket material according to SAE-AMS3332 has been considered acceptable.
11. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have shore hardness 20 ±5, thickness .047 ±.008 flush with bracket. Gasket material according to SAE-AMS3332 has been considered acceptable.

FIGURE 1. Dimensions and configurations - Contintued.

TABLE I. Dash numbers and characteristics.

Dash number MS25329-	Type	Coil	Terminal type	Max weight in pounds
D1	I	dc	Plug in	0.4
A1	I	ac	Plug in	0.4

TABLE II. Operating characteristics.

PIN MS 25329-	Coil data											Time - (milliseconds maximum)					
	Coil	Rated			Max		Max pick-up voltage			Drop out volt-age 2/	Hold volt-age 2/	Oper-ate 3/	Re-lease 4/	Contact Bounce			
														Main		Aux	
		Volts 1/	Freq Hz	Res Ω	Volts	Amp	Nor-mal 2/	High temp test	Cont cur-rent test					NO	NC	NO	NC
D1	X1,X2	28	dc	N/A	29	0.18	18	19.8	22.5	1.5	7.0	25	20	2	2	---	---
A1	X1,X2	115	400 5/	N/A	122	0.04	90	95	103	5.0	30	25	50	2	2	---	---

1/ CAUTION: Use of any coil voltage less than rated coil voltage will compromise the operation of the relay.
2/ Over the temperature range.
3/ With rated coil voltage.
4/ From rated coil voltage.
5/ MS25329-A1 may be used on 60 Hz if maximum ambient temperature is limited to 85°C, maximum current will be 0.044 ampere.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles x 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	5	5			5	4							
Inductive	100													
Inductive	20	3	3			3	2							
Motor	100	1.5	1.5			1.5	1							
Lamp	100	0.8	0.8			0.8	0.6							
Transfer load														2/
Mechanical life reduced current	400	1.25	1.25			1.25	1							
Mixed loads	Applicable per specification													

1/ Absence of value indicates relay is not rated for 3-phase applications.
2/ Transfer load indicates relay is suitable for transfer between unsynchronized ac power supplies at rating indicated.

Environmental characteristics.

Temperature range	-70°C to +125°C
Max altitude rating	80,000 ft
Shock G-level	50 g's
Duration	11 ms
Max duration contact opening	10 μs
Vibration - sinusoidal	
G-level	10 g's
Frequency range	5 - 1,500 Hz
Non operate:	
G-level	15 g's
Frequency range	70 - 2,000 Hz
Acceleration	15 g's

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

Electrical characteristics.

Minimum insulation resistance:

Initial: 100 megohms.

After life or environmental tests: 50 megohms.

Dielectric strength (sea level).

	Initial	After life tests
Coil to case	1,000 V rms	1,000 V rms
Aux contacts	N/A	N/A
All other points	1,000 V rms	1,000 V rms

Dielectric strength (altitude, mounted in mating socket):

	80,000 ft
Coil to case	500 V rms
Aux contacts	
All other points	500 V rms

Max contact drop initial: 0.150 volt.

After life test: 0.175 volt.

Overload current (NO): 20 amperes

Rupture current 25 amperes

Duty rating: Continuous.

RFI specification: MIL-STD-461.
(Applicable to coil circuits of ac operated relays).

Conformance inspection.

Performance of groups B and C tests are not applicable.

Qualification by similarity: See MIL-PRF-6106.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-6106, this document references the following:

ASTM-B488 MIL-STD-461 SAE-AMS3332

Custodians:
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2020-043)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.