


FED SUP CLASS
5935

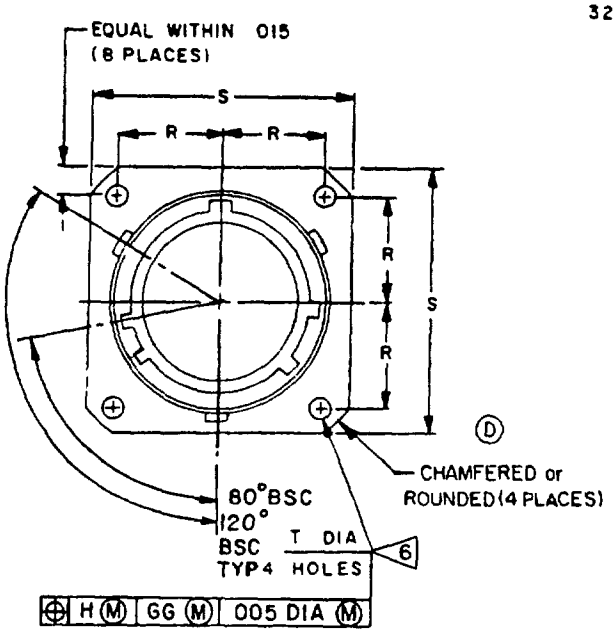

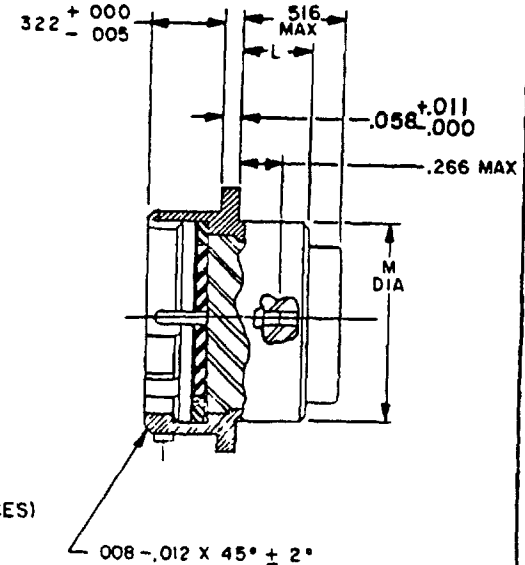


STYLE P

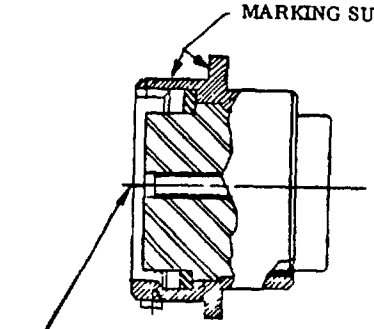

STYLE S

FOR DETAILS OF CONNECTOR
FRONT END CONFIGURATION
SEE PROCUREMENT SPECIFICATION

EXAMPLE OF PART NUMBER

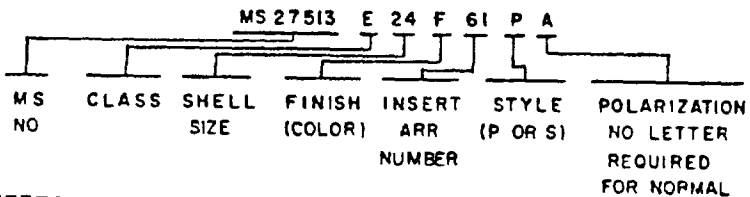

Ⓓ FOR CHANGES SEE SHEETS 1 & 2

APPROVED 3 SEP 68 REVISED Ⓑ 13 AUG 74 Ⓒ 2 JAN 1976 Ⓓ 15 JUNE 1984

P A AF-85 Other Cust ARMY-CR NAVY-AS	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, BOX MOUNTING FLANGE, CRIMP TYPE BAYONET COUPLING, SERIES II	MILITARY STANDARD MS 27513
Procurement Specification MIL-C-38999		SUPERSEDES: MS27513 (USAF)	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3367-7

Reviewer activities. Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

User activities: Army -
Navy -
Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

User activities: Army -
Navy -
Air Force -

SHELL SIZE	L MAX	M DIA MAX	R BSC	S MAX	T DIA + 010 - 005
8	.312	.453	.297	.828	120
10	↑	.578	.3595	.954	↑
12		.703	.406	1.047	
14		828	.453	1 141	
16		.953	.4845	1.234	
18		1.062	.531	1 328	↓
20		1.188	.578	1.453	.120
22	↓	1.312	.625	1.578	.120
24	312	1 438	.6875	1.703	.147

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.03	.223	5.66	.6875	17.46	1 328	33.73
007	18	.266	6.76	703	17 86	1 391	35.33
.008	20	.297	7 54	.828	21 03	1 438	36.53
.010	25	.312	7.92	.953	24.21	1.453	36 91
012	30	.322	8 18	.954	24.23	1.516	38.51
.015	38	.3595	9 13	1.047	26.59	1.578	40 08
.036	.91	.406	10 31	1.062	26.97	1.641	41 68
.058	1 47	.453	11.51	1.078	27.38	1 703	43.26
069	1.75	4845	12 31	1.141	28.98	1.766	44.86
120	3 05	.516	13.11	1.188	30.18	1 891	48.03
.139	3.53	.531	13 49	1.234	31.34	2 016	51 21
.147	3.73	.578	14.68	1 266	32 16	2.204	55 98
		.625	15 88	1.312	33 32		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For main keyway and keyway positions, see MIL-C-38999.
4. For design feature purposes this standard takes precedence over documents referenced herein.
5. Referenced documents shall be of the issue in effect on date of invitation for bid.
6. The gage feature for GG shall be 010 (25 mm) smaller than the MMC size at basic location.

APPROVED 3 SEP 68 REVISED (D) FOR CHANGES SEE SHEETS 1 & 2

PA AF-85 Other Cust ARMY-CR NAVY-AS	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, BOX MOUNTING FLANGE, CRIMP TYPE BAYONET COUPLING, SERIES II	MILITARY STANDARD MS 27513
Procurement Specification MIL-C-38999		SUPERSEDES: MS 27513(USAF)	SHEET 2 OF 2

DD FORM 1 SEP 63 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U S GOVERNMENT PRINTING OFFICE 1984 — 705 040/A3875

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.