INCH-POUND

MS28925D
25 May 2005
Superseding
MS28925C
25 April 1977


DETAIL SPECIFICATION SHEET

LIGHT, SIGNAL, HAND HELD, 4-1/2 INCH

Inactive for new design after 4 January 2000.


This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-L-6723.

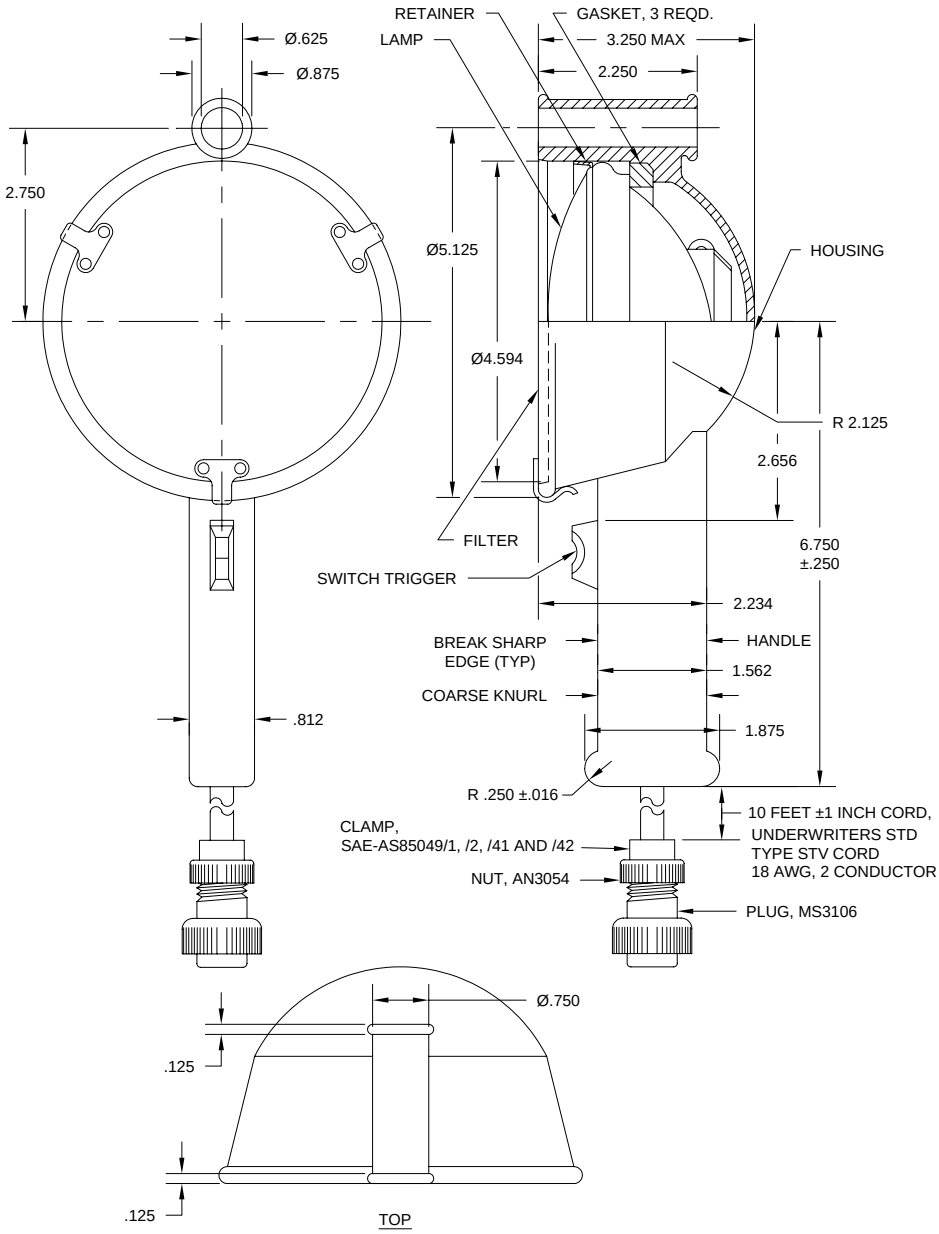

FINISH: LIGHT, LUSTERLESS BLACK, FED-STD-595, COLOR 37038


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

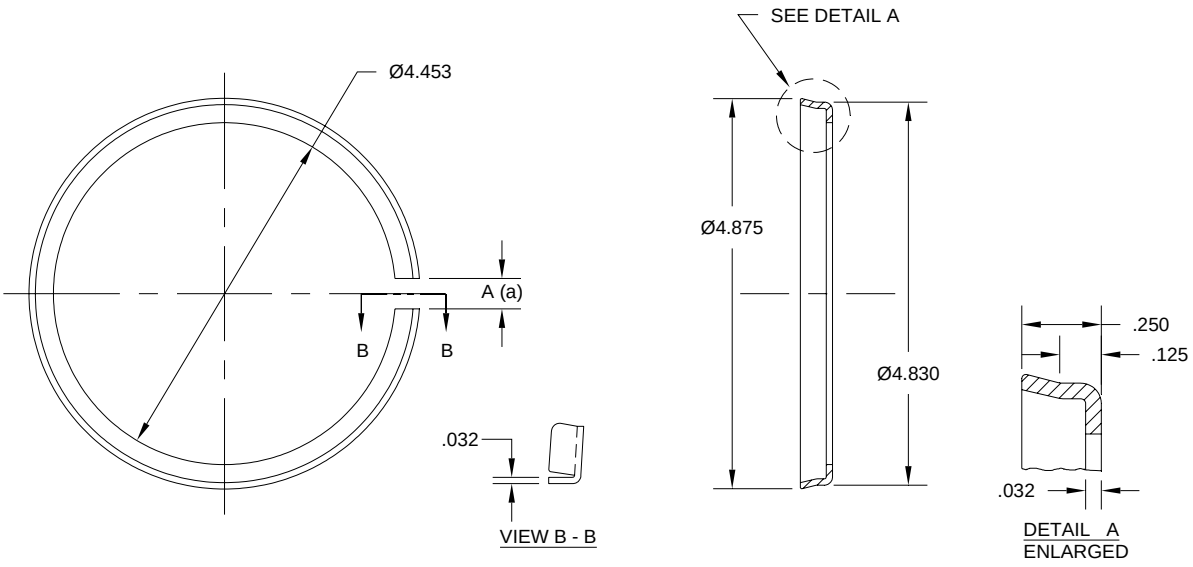

(a) DIMENSION A TO BE APPROXIMATELY .375 WHEN IN PLACE IN LIGHT ASSEMBLY AND APPROX .875 WHEN OUT OF ASSEMBLY. ROLL APPROXIMATELY 4.750 O.D. TRIM AND BEND TO CONFORM TO CLOSED DIMENSIONS GIVEN TO ALLOW SUFFICIENT SPRING TENSION TO SATISFACTORILY RETAIN LAMP IN HOUSING.

MATERIAL: ALUMINUM OR ALUMINUM ALLOY; STEEL.
FINISH: ALUMINUM OR ALUMINUM ALLOY, ANODIZE, MIL-A-8625 OR CHEMICAL FILM CONFORMING TO MIL-C-5541.
STEEL. CADMIUM PLATE, AMS-QQ-P-416 OR ZINC PLATE, ASTM B633.


RETAINER

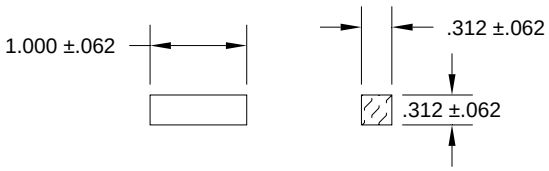

MATERIAL: FELT, RUBBER SUBSTITUTE OR OTHER SUITABLE MATERIAL. COMMERCIAL GRADE.

GASKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

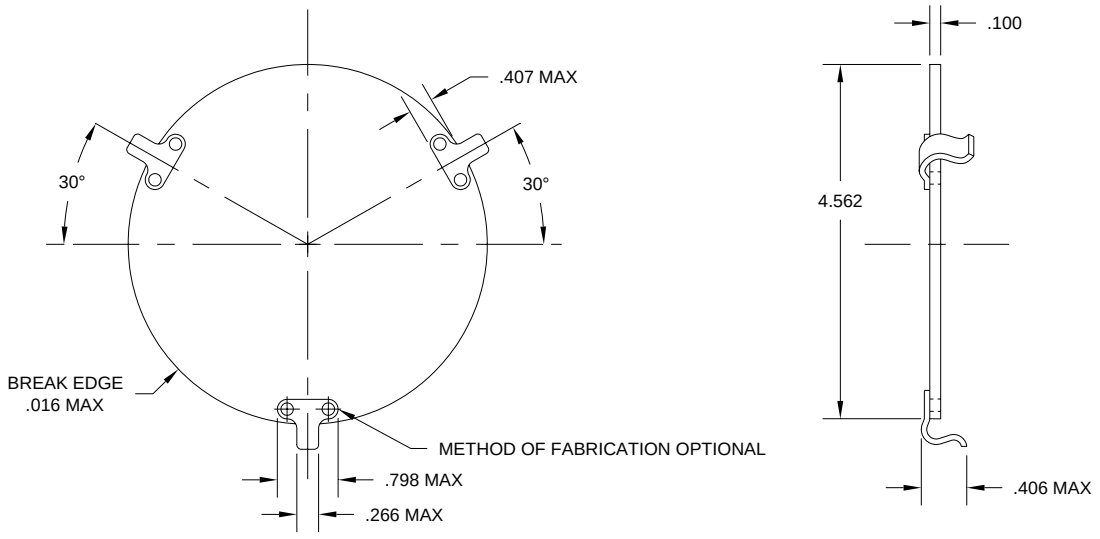


MATERIAL: LENS: PLASTIC, CLIPS: METAL

THE DIMMING FILTER SHALL BE COLOR NON-SELECTIVE AND SHALL HAVE A TRANSMISSION OF .02 +.01. OTHER FILTERS SHALL CONFORM TO MIL-C-7989.

THE CLIPS SHALL HOLD THE FILTER IN THE LIGHT AGAINST AN ACCELERATION OF 2 G IN ANY DIRECTION, YET SHALL PERMIT CONVENIENT INSERTION AND REMOVAL OF FILTER.

FILTER

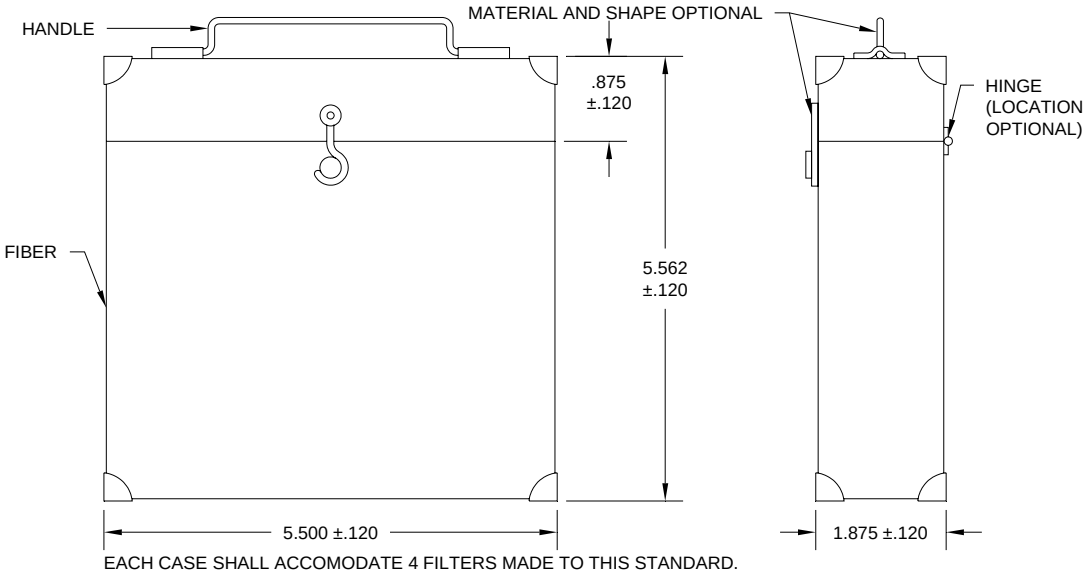


EACH CASE SHALL ACCOMODATE 4 FILTERS MADE TO THIS STANDARD.


CASE

FINISH: FILTER CLIPS AND METAL FITTINGS OF CASE; ALUMINUM OR ALUMINUM ALLOY, ANODIZE, MIL-A-8625 OR CHEMICAL FILM CONFORMING TO MIL-C-5541.
STEEL; CADMIUM PLATE, AMS-QQ-P-416 OR ZINC PLATE, ASTM B633.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

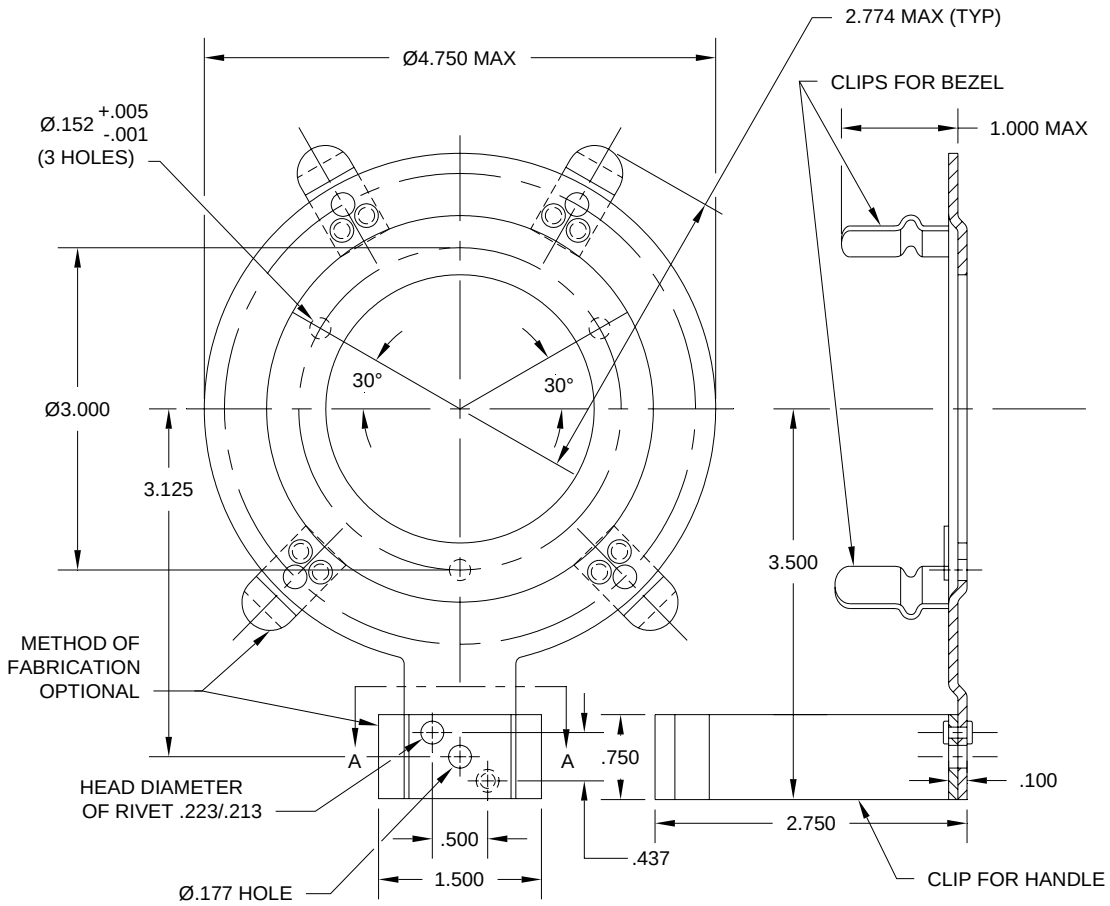

BRACKET



SECTION A - A

THIS BRACKET SHALL BE SUITABLE FOR HOLDING THE LIGHT IN ANY ORIENTATION AGAINST AN ACCELERATION OF 4 G IN ANY DIRECTION, YET PERMIT CONVENIENT INSERTION AND REMOVAL OF THE LIGHT.

THE BRACKET SHALL BE DESIGNED SO THAT NEITHER THE BRACKET, NOR SUITABLE STANDARD ROUND- HEAD SCREWS USED FOR MOUNTING THE BRACKET, SHALL SCRATCH A FILTER INSTALLED IN THE LIGHT.

FINISH: ALUMINUM OR ALUMINUM ALLOY; ANODIZE, MIL-A-8625 OR CHEMICAL FILM CONFORMING TO MIL-C-5541.
STEEL; CADMIUM PLATE, AMS-QQ-P-416 OR ZINC PLATE, ASTM B633.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

DASH NO.	ITEMS		PLUG	LAMP	WEIGHT LB MAX	SUPERSEDES
-1	LIGHT	28 VOLT	MS3106-16-11P	MS25239-4501	2.0	AN3089-6
-2		13 VOLT		MS25239-4501		AN3089-5
-3		28 VOLT	HUBBEL 7542 OR EQUIVALENT	MS25239-4501		AN3089-12
-4		13 VOLT		MS25239-4501		AN3089-11
-5	ONE -1 LIGHT, ONE -20 CASE WITH FILTERS					AN3089-4
-6	ONE -2 LIGHT, ONE -20 CASE WITH FILTERS					AN3089-3
-7	ONE -1 LIGHT, ONE -20 CASE WITH FILTERS, ONE -21 BRACKET					AN3089-2
-8	ONE -2 LIGHT, ONE -20 CASE WITH FILTERS, ONE -21 BRACKET					AN3089-1
-9	ONE -3 LIGHT, ONE -20 CASE WITH FILTERS					AN3089-10
-10	ONE -4 LIGHT, ONE -20 CASE WITH FILTERS					AN3089-9
-11	ONE -3 LIGHT, ONE -20 CASE WITH FILTERS, ONE -21 BRACKET					AN3089-8
-12	ONE -4 LIGHT, ONE -20 CASE WITH FILTERS, ONE -21 BRACKET					AN3089-7
-13	GASKET				.01	
-14	RING				.1	
-15	FILTER, GREEN				.2	
-16	FILTER, RED					
-17	FILTER, YELLOW					
-18	FILTER, DIMMING					
-19	CASE				1.0	
-20	ONE -19 CASE, ONE -15 GREEN FILTER, ONE -16 RED FILTER, ONE -17 YELLOW FILTER, ONE -18 DIMMING FILTER					
-21	BRACKET				.2	

REQUIREMENTS

1. Dimensions in inches.
2. Unless otherwise specified, tolerances: Decimals ±.016; angular ±1°. Standard commercial tolerances shall apply to all material used in construction of light.
3. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
4. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.
5. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

Preparing activity:
DLA - IS

Custodians:
Army – CR4
Navy - AS

(Project 6220-1161)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.