

FED. SUP CLASS
5970

AS SUPPLIED

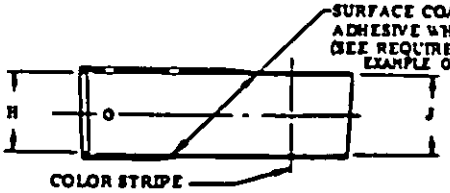


AS RECOVERED

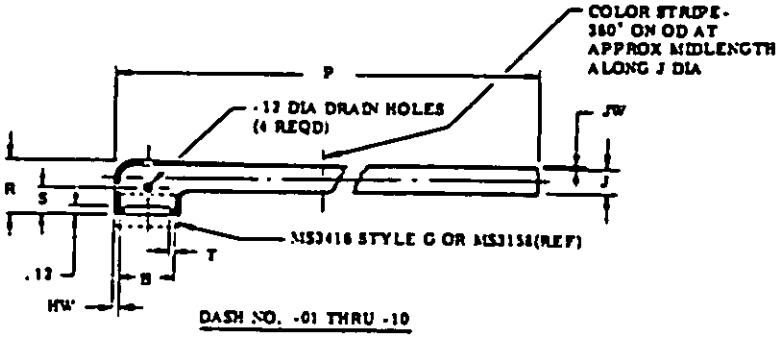


DASH NO. -01 THRU -10

AS SUPPLIED

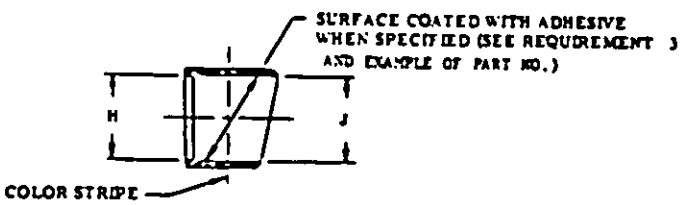

AS RECOVERED

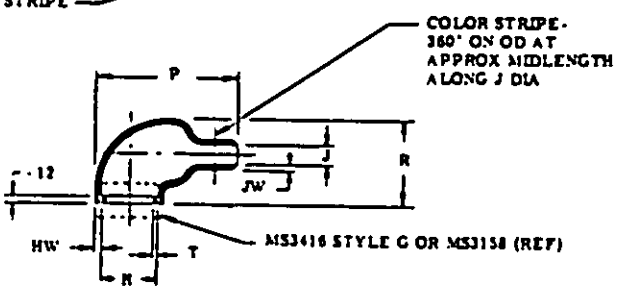

DASH NO. -11 THRU -18

NOTES:

1. DIMENSIONS IN INCHES.
2. FOR USE WITH MS3416 STYLE G AND MS3158 BACKSHELLS.
3. BOOTS SHRINK UPON APPLICATION OF HEAT IN EXCESS OF 150°C.

Ⓔ REINSTATED AS OF 17 JULY 1985

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓔ DENOTES CHANGES

REVIEW ACTIVITIES:
NAVY - EC

APPROVED 15 OCTOBER 71 REVISED Ⓐ 12 OCT 73 Ⓑ 11 JUNE 74 Ⓒ 17 FEB 78 Ⓓ 10 MAY 1982 Ⓔ 17 JULY 1985

DISTRIBUTION STATEMENT A. Approved for release; distribution is unlimited.

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cost	TITLE BOOTS, HEAT-SHRINKABLE, STRAIN-RELIEF, RIGHT ANGLE	MILITARY STANDARD MS3117(AS)
PROCUREMENT SPECIFICATION MIL-I-81765(AS)	SUPERSEDES:	SHEET 1 OF 3

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 17500

PROJECT NO. 5970-H638

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

REVIEW ACTIVITIES:
NAVY - EC

DASH NO.	BOOTS FOR BACKSHELLS (REF) MS3416 STYLE G	MS3158	H. DIA. SUPP. MIN	H. DIA. REC. MAX	J DIA. SUPPLIED MIN Mat'l A, B	J DIA. SUPPLIED MIN Mat'l C	J DIA. REC. MAX Mat'l A, B & C	P ±.25	R ±.10	S ±.06	T ± ±.004	HW ±20%	JW ±20%
-01	-	-3, -8	.88	.45	.88	.55	.25	4.14	.73	.47	.040	.06	.045
-02	-3, -8	-10	1.01	.59	1.01	.63	.29	4.88	.78	.47	.040	.08	.045
-03	-10	-12, -14	1.16	.74	1.16	.72	.33	5.76	.82	.47	.040	.07	.045
-04	-12, -14	-16, -18	1.34	.90	1.34	.84	.38	6.78	.86	.47	.040	.07	.045
-05	-16, -18	-20	1.47	1.16	1.47	.91	.41	7.29	.96	.47	.065	.08	.045
-06	-20, -22	-22, -24, -61	1.72	1.34	1.72	1.07	.48	8.41	1.08	.47	.065	.08	.045
-07	-24, -61	-28	1.97	1.62	1.97	1.24	.56	8.84	1.16	.47	.065	.09	.055
-08	-28, -32	-32, -36	2.47	1.85	2.47	1.54	.69	8.05	1.31	.63	.080	.10	.055
-09	-36	-40	2.73	2.35	2.73	1.70	.77	9.19	1.38	.63	.080	.10	.055
-10	-40, -44 -48	-44, -48	3.22	2.64	3.22	2.01	.90	9.33	1.75	.63	.080	.10	.055
-11	-	-3, -8	.92	.41	.92	.47	.22	1.08	.89	-	.040	.05	.05
-12	-3, -8	-10	1.12	.56	1.12	.58	.26	1.65	1.07	-	.040	.06	.06
-13	-10	-12, -14	1.22	.70	1.22	.63	.28	1.84	1.22	-	.040	.07	.07
-14	-12, -14	-16, -18	1.42	.88	1.42	.73	.33	2.20	1.38	-	.040	.07	.07
-15	-16, -18	-20, -22	1.68	1.11	1.68	.87	.39	2.71	1.73	-	.065	.08	.08
-16	-20, -22 -24, -61	-24, -28 -61	2.04	1.38	2.04	1.39	.62	3.84	2.08	-	.065	.13	.13
-17	-28, -32	-32, -36	2.60	1.75	2.60	1.80	.80	4.81	2.60	-	.080	.15	.15
-18	-36, -40, -44, -48	-40, -44 -48	3.22	2.38	3.22	2.25	1.00	5.90	3.30	-	.080	.18	.18

APPROVED 19 OCTOBER 71 REVISED (E) FOR CHANGES SEE SHEET 1

P.A. NAVY - AS
Other Cost

PROCUREMENT SPECIFICATION
MIL-I-81765(AS)

SUPERSEDES:

TITLE
BOOTS, HEAT-SHRINKABLE, STRAIN-RELIEF, RIGHT ANGLE

MILITARY STANDARD
MS3117(AS)

SHEET 2 OF 3

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 11704

FED. SUP CLASS
5970

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIALS SHALL BE IN ACCORDANCE WITH THE FOLLOWING TABLE:

MATERIAL DESIGNATOR	MATERIAL TYPE	COLOR STRIPE	CONTINUOUS OPERATING TEMP. RANGE	FLEXIBILITY
A	MIL-I-81765/1 TYPE II	RED	-55°C TO +135°C	FLEXIBLE
B	MIL-I-81765/1 TYPE I	WHITE	-55°C TO +135°C	SEMI-RIGID
C	MIL-I-81765/4	YELLOW	-55°C TO +200°C	FLEXIBLE

2. COLOR STRIPES SHALL BE 1/8 INCH WIDE AND LOCATED AS SHOWN. COLORS SHALL REMAIN DISTINGUISHABLE OVER THE TEMPERATURE RANGE SPECIFIED.

3. ADHESIVE APPLIED ON INSIDE SURFACE SHALL BE A THERMOPLASTIC TYPE WITH A RING AND BALL SOFTENING POINT OF 120°C ± 5°C.

4. QUALIFICATION: 3 TYPICAL SAMPLES ASSEMBLED ON QUALIFIED CONNECTORS OR CONNECTORS UNDERGOING QUALIFICATION AND AN APPROPRIATE BACKSHELL SHALL BE TESTED PER MIL-STD-1344 AS FOLLOWS:

A. EXAMINATION OF PRODUCT
B. VIBRATION, METHOD 2005
C. INSULATION RESISTANCE, METHOD 3003
D. WATER PRESSURE IN ACCORDANCE WITH MIL-C-5015.
E. SHOCK, METHOD 2004
F. THERMAL SHOCK, METHOD 1003
G. POST EXAMINATION OF PRODUCT

EXAMPLE OF PART NUMBER - MS3117-01AC

MS3117 — 01 A C

MS3117: BASIC PART NO. | 01: DASH NO. | A: MATERIAL DESIGNATOR (A, B OR C) | C: ADHESIVE (C - COATED OR U - UNCOATED)

REVIEW ACTIVITIES:
NAVY - EC

APPROVED 19 OCTOBER 71 REVISED (E) FOR CHANGES SEE SHEET 1

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

P.A. NAVY - AS Other Cost	TITLE: BOOTS, HEAT-SHRINKABLE, STRAIN-RELIEF, RIGHT ANGLE	MILITARY STANDARD MS3117(AS)
PROCUREMENT SPECIFICATION MIL-I-81765(AS)	SUPERSEDES:	SHEET 3 OF 3

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO 17709

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.