INCH-POUND

MS3481A
1 March 2007
SUPERSEDING
MS3481 (NAVY)
21 January 1970

DETAIL SPECIFICATION SHEET

TOOL, CONNECTOR ASSEMBLY, FOR MIL-DTL-26482 CONNECTORS

Reactivated after 1 March 2007 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

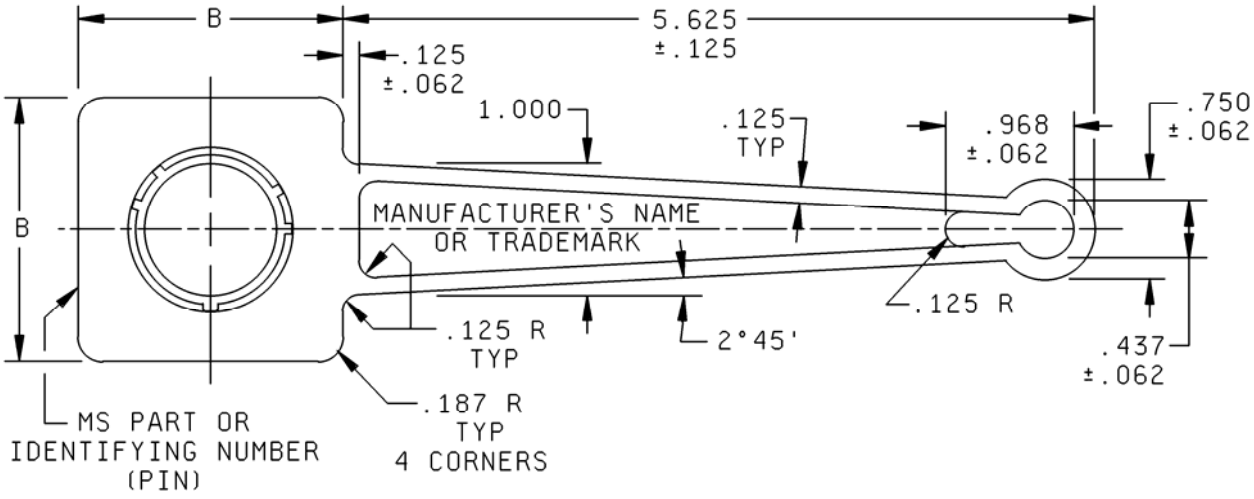


FIGURE 1. Tool, dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

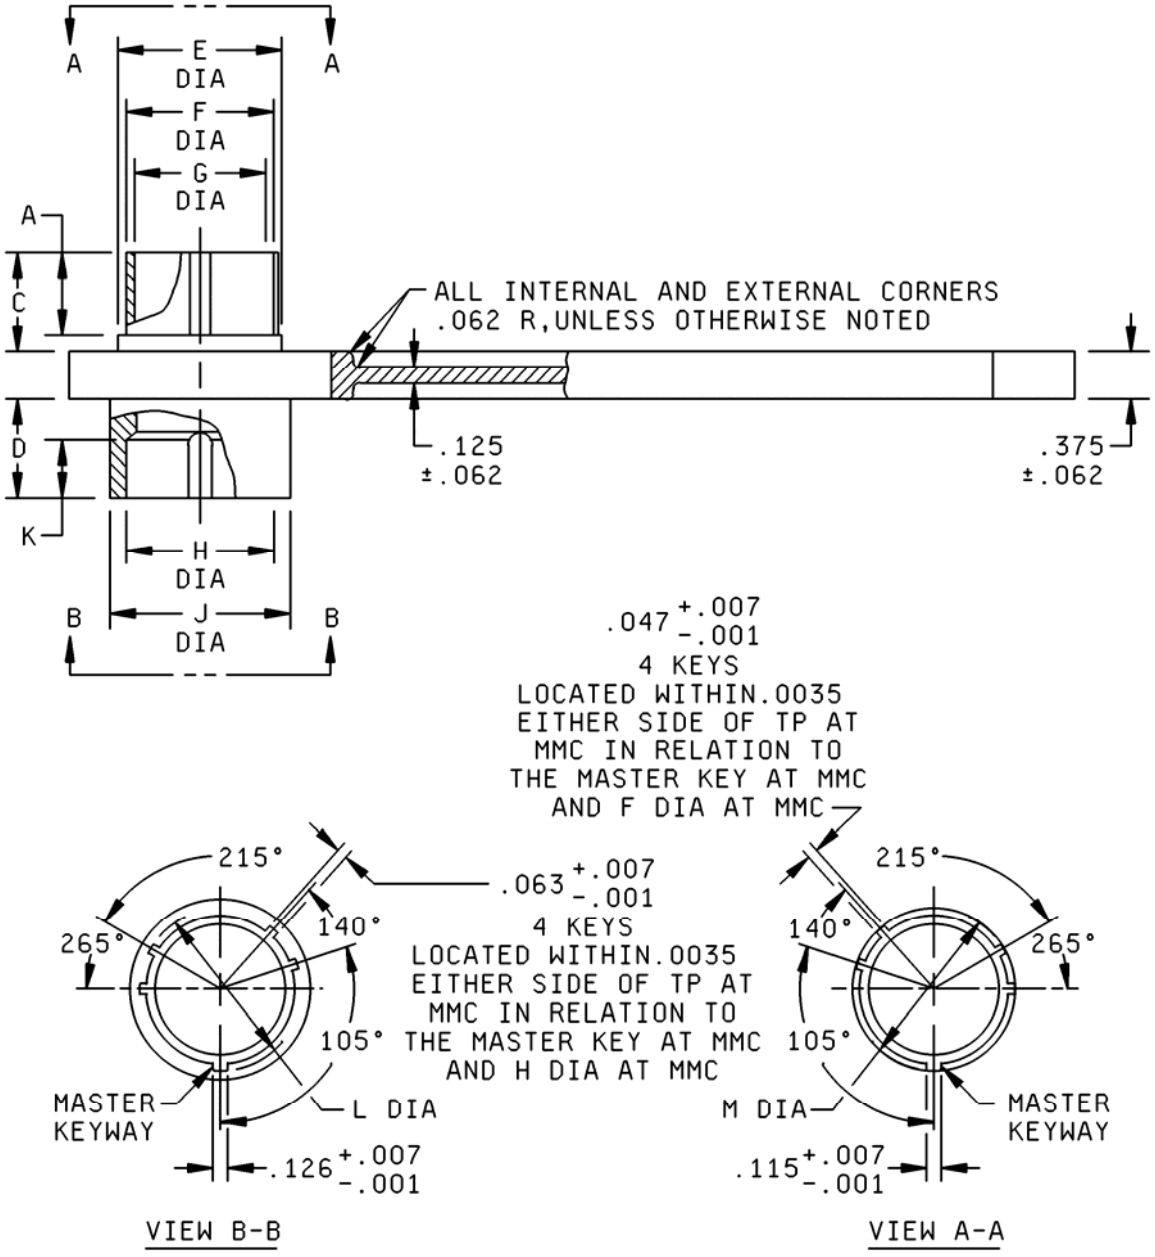


FIGURE 1. Tool, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

Dash number	Shell size	A ± .030	B ± .060	C approx	D approx	E dia approx	F dia + .001 - .005
-08	8	.380 (.015)	1.250 (.049)	.410 (.016)	.455 (.018)	.473 (.019)	.357 (.014)
-10	10					.590 (.023)	.485 (.019)
-12	12					.750 (.030)	.597 (.024)
-14	14					.875 (.034)	.722 (.028)
-16	16		2.000 (.079)			1.000 (.039)	.847 (.033)
-18	18					1.125 (.044)	.947 (.037)
-20	20	.425 (.017)		.495 (.019)	.540 (.021)	1.250 (.049)	1.072 (.042)
-22	22					1.375 (.054)	1.197 (.047)
-24	24					1.500 (.059)	1.322 (.052)

Shell size	G dia min	H dia + .005 - .001	J dia + .001 - .005	K min	L dia + .005 - .006	M dia + .001 - .010
8	.292 (.011)	.362 (.014)	.473 (.019)	.281 (.011)	.412 (.016)	.402 (.016)
10	.409 (.016)	.490 (.019)	.590 (.023)		.540 (.021)	.530 (.021)
12	.523 (.021)	.607 (.024)	.750 (.030)		.689 (.027)	.679 (.027)
14	.648 (.026)	.732 (.029)	.875 (.034)		.814 (.032)	.804 (.032)
16	.772 (.030)	.857 (.034)	1.000 (.039)		.939 (.037)	.929 (.037)
18	.862 (.034)	.962 (.038)	1.125 (.044)		1.039 (.041)	1.029 (.041)
20	.987 (.039)	1.087 (.043)	1.250 (.049)	.343 (.014)	1.164 (.046)	1.154 (.045)
22	1.111 (.044)	1.212 (.048)	1.375 (.054)		1.289 (.051)	1.279 (.050)
24	1.237 (.049)	1.337 (.053)	1.500 (.059)		1.414 (.056)	1.404 (.055)

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. Unless otherwise specified, tolerances shall be ± .016 for decimals. Angular tolerances are TP.


FIGURE 1. Tool, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
These tools are for use with connectors in accordance with MIL-DTL-26482.
Shell material: High grade aluminum alloy.
Handle material: Die cast aluminum alloy in accordance with ASTM-B85.
Finish: Nickel plate in accordance with SAE-AMS-QQ-N-290.
All burrs and sharp edges shall be removed.

PIN example:

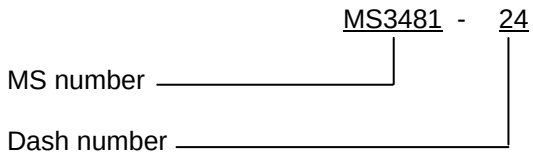

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

ASTM-B85
SAE-AMS-QQ-N-290

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4656-019)

Review activities:
Army - GL
Navy - EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.