

FED. SUP CLASS
2910

REVIEW ACTIVITIES: NAVY-WP, YD; AF-87, 69
USER ACTIVITY: ARMY-GL

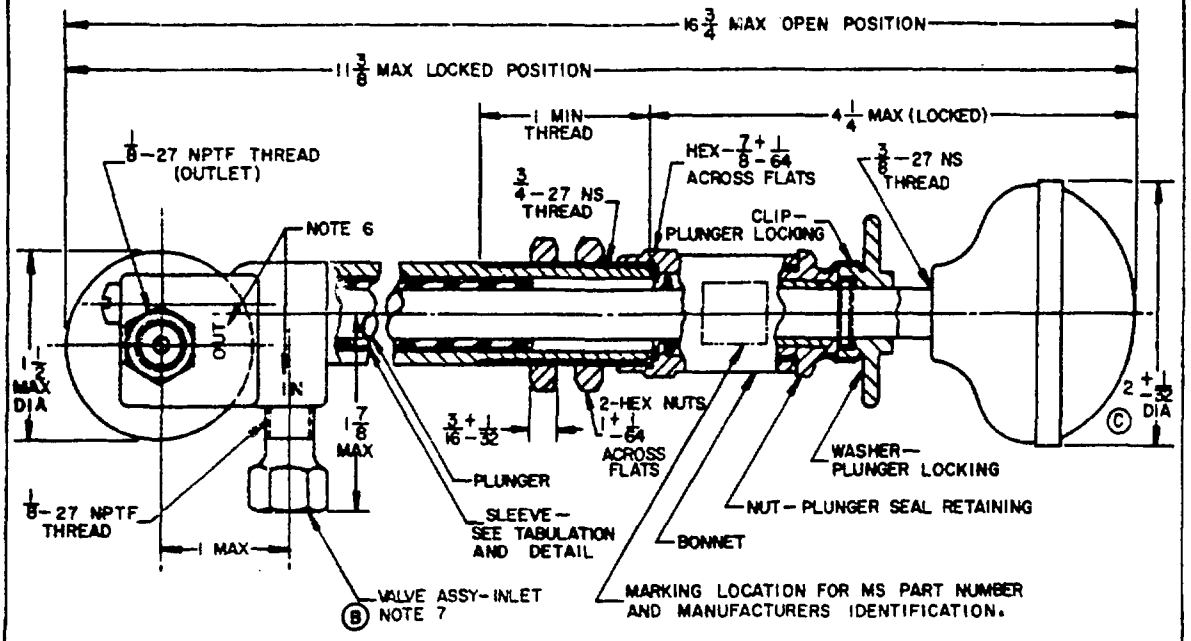

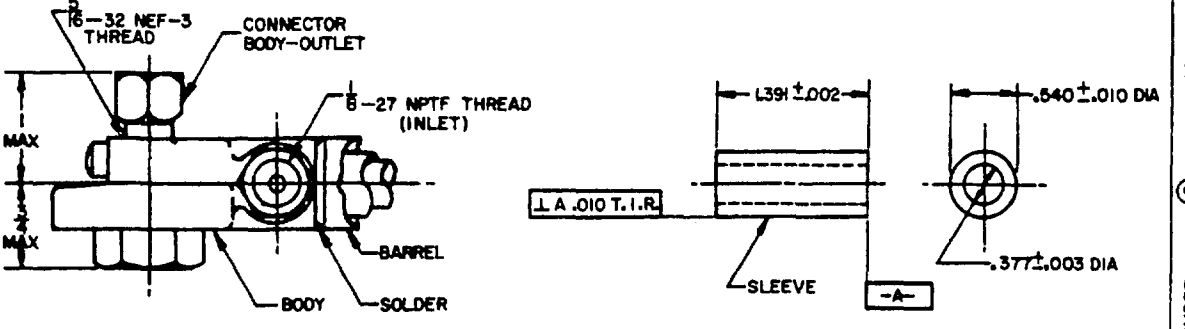

MS PART NO.	CAPACITY IN CU CM	NUMBER OF SLEEVES	FORMER PART NUMBER
MS 51084-1	20	0	ORD 8710979
MS 51084-2	10	2	ORD 8722841
MS 51084-3	5	3	ORD 8742193
MS 51084-4	15	1	ORD 8722842

BASIC 5cc PUMP (MS 51084-3) IS MODIFIED TO OBTAIN 10cc, 15cc, OR 20cc BY REMOVING SLEEVES FROM THE SHAFT TO INCREASE THE LENGTH OF THE STROKE. FOR SUPPLY PURPOSES, USE REPLACEMENT KIT ORD. PART NO. 5702557 WHICH CONSISTS OF THE BASIC PRIMER PUMP WITH SLEEVES (MS 51084-3), CONNECTING HARDWARE NECESSARY FOR REPLACEMENT OF NON-STANDARD PUMPS, AND INSTALLATION INSTRUCTIONS.

APPROVED 15 JULY 1958 REVISED (B) 4 NOVEMBER 1964 (C) 17 JANUARY 1966

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MO (ATAC) Other Cust Navy-Docks 11-ASD	TITLE PUMP, MANUAL, ENGINE PRIMING	MILITARY STANDARD MS 51084
PROCUREMENT SPECIFICATION MIL-P-3306	SUPERSEDES:	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2910

NOTES:

1. MATERIAL SHALL BE AS FOLLOWS:

PLUNGER - BRASS, LEADED, COMP. 11 OR 22, 1/2 HARD, SPECIFICATION QQ-B-626, 3/8 DIA.

BONNET
NUT - PLUNGER SEAL RETAINING
WASHER - PLUNGER LOCKING
CONNECTOR BODY - OUTLET
(B) VALVE ASSY - INLET
— BRASS, COMP. 11 OR 12, 1/2 HARD SPECIFICATION QQ-B-626

BARREL - BRASS, ROUND, SEAMLESS TUBING, COND-HARD-DRAWN, COMP. 2 OR 3, SPECIFICATION MIL-B-13492, 3/4 O.D. X 9/16 I.D.

BODY - BRONZE CASTING, COMP. 2, SPECIFICATION QQ-B-691.

CLIP - PLUNGER LOCKING - STEEL, CARBON, FS 1060 TO FS 1075, CR TEMPER 2 TO 5, SPECIFICATION QQ-S-00640, .017 THICK; CADMIUM PLATE, TYPE II CLASS 2, SPECIFICATION QQ-P-416.

SLEEVE - PLASTIC, FORM TR, TYPE PBM, SPECIFICATION MIL-P-79.

SOLDER - COMP. SN-40 OF SPECIFICATION QQ-S-571.

2. WHERE APPLICABLE, THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H28.

3. DIMENSIONS ARE IN INCHES, TOLERANCES AS SHOWN.

4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

6. MARKING SHALL CONSIST OF INLET AND OUTLET PORT IDENTIFICATION, MS PART NUMBER, AND MANUFACTURERS IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

(B) 7. VALVE ASSEMBLY CONTAINS CHECK VALVE FOR PROPER OPERATION OF PUMP. DO NOT REMOVE OR SUBSTITUTE FITTINGS.

8. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN SHOWN HEREON BY DIMENSIONS, NOTATIONS OR REFERENCED DOCUMENTS.

SEE SHEET 1 FOR CHANGES

REVIEW ACTIVITIES: NAVY - WP, YD ; AF - 87, 69
USER ACTIVITY: ARMY - GL

APPROVED 15 JULY 1958 REVISED (B) 4 NOVEMBER 1964 (C) 17 JANUARY 1966

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MO(ATAC) Other Cust Navy—Docks 11-ASD	TITLE PUMP, MANUAL, ENGINE PRIMING	MILITARY STANDARD MS 51084
PROCUREMENT SPECIFICATION MIL—P—3306	SUPERSEDES	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:57Z
Check the source to verify that this is the current version before use.