


REVIEW ACTIVITIES: ARMY—MU, EL

FED. SUP CLASS
2350

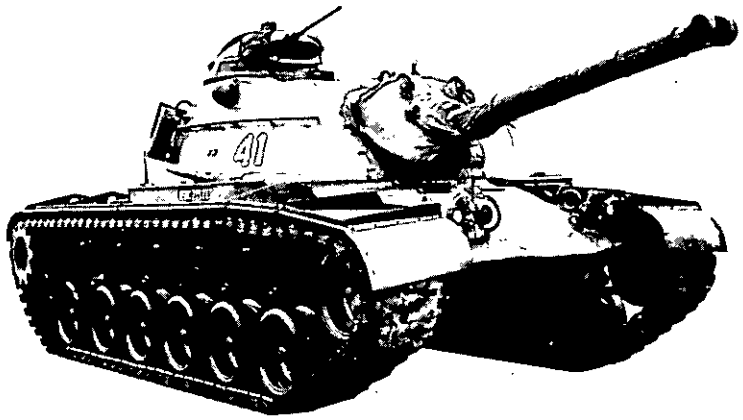

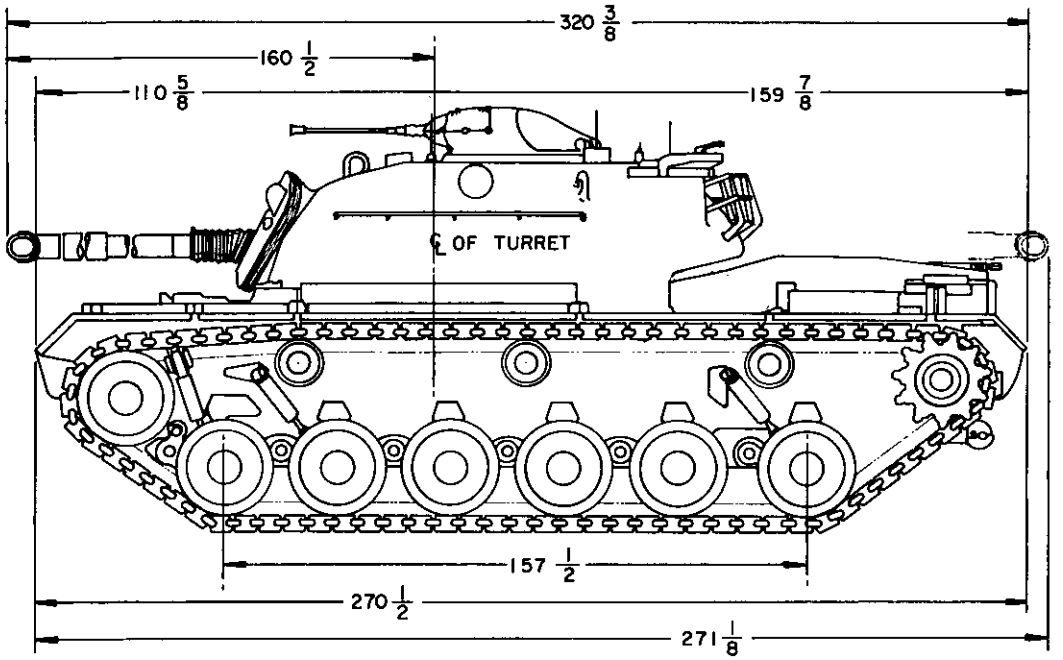

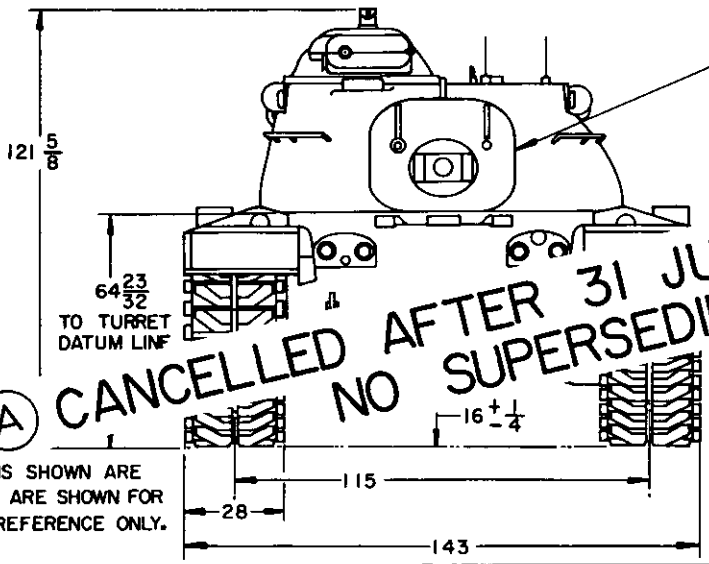

FLAME THROWER MECHANIZED,
MAIN ARMAMENT, M7A1-6,
DWG. NO B 81-1-6145

(A) CANCELLED AFTER 31 JULY 1981.
NO SUPERSEDING STANDARD.

NOTE:
ALL DIMENSIONS SHOWN ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

APPROVED 26 AUGUST 1964 REVISED (A) 31 JUL 81

MS PART NO	DRAWING NO
MS 53080-1	8750111

P.A. MO (ATAC) Other Cust	TITLE TANK, COMBAT, FULL TRACKED, FLAME THROWER, M67A1	MILITARY STANDARD MS 53080 (MO)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2350

VEHICLE CHARACTERISTICS

REVIEW ACTIVITIES: ARMY—MU, EL

GENERAL

WEIGHT (COMBAT LOADED) APPROX. 105,000 LBS.
CREW 3
WEIGHT (LESS CREW, STOWAGE AND FUEL) 100,000 LBS.
CENTER OF GRAVITY 49.5 IN. ABOVE GROUND, 130 IN. FROM CENTER LINE OF SPROCKETS
UNIT GROUND PRESSURE 11.9 LBS/SQ. INCH
TURRET RING 85 IN. DIAMETER (INSIDE)

VISION AND SIGHTING EQUIPMENT

PERISCOPE (VISION) DRIVER'S	TYPE M27	QTY. 3
PERISCOPE (IR VISION) DRIVER'S	TYPE M24	QTY. 1
PERISCOPE COMMANDER'S CUPOLA	TYPE M28C	QTY. 1
PERISCOPE MOUNT COMMANDER'S CUPOLA	TYPE M104A2	QTY. 1
VISION BLOCKS COMMANDER'S CUPOLA	Part No. 6300790	QTY. 5
PERISCOPE GUNNER'S	TYPE M30C	QTY. 1
PERISCOPE MOUNT GUNNER'S	TYPE M113	QTY. 1
QUADRANT, GUNNER'S	TYPE M1A1	QTY. 1

ARMAMENT

FLAME THROWER, MECHANIZED, MAIN ARMAMENT, ASSEMBLY, M7A1-6 CONSISTING OF; 1 GUN, FLAME THROWER, MECHANIZED, ASSY. M6
PRIMARY 1 UNIT, FUEL AND PRESSURE, COMBAT VEHICLE, M7A1
TRAVERSE, RIGHT 360° LEFT 360° RATE 4 RPM
POWER, TYPE HYD. MANUAL TYPE GEAR TRAIN
ELEVATION 45° DEPRESSION 12°
STABILIZER SYSTEM NONE

SECONDARY ARMAMENT

1. CAL. 30 BROWNING, M1919A4 OR M37 (COAXIAL) TURRET TRAVERSE 360° ELEVATION -9° TO +45°
2. CAL. 50, M2, HB (FLEX) AA GUN COMMANDER TRAVERSE 360° ELEVATION -15 TO +60°

OTHER: ONE (1) CAL. 45, M3A1
ONE (1) CARBINE CAL. 30 M1 OR M1A1

AMMUNITION

365 GALS THICKENED FLAME THROWER FUEL
180 RDS. CAL. 30 (CARBINE)
3500 RDS. CAL. 30 (MACH. GUN)
700 RDS. CAL. 50 (MACH. GUN)
180 RDS. CAL. 45 (SUB MACH. GUN)
OTHER: GRENADES 8 (HAND)

RUNNING GEAR

SUSPENSION, TYPE INDIVIDUAL TORSION BAR
NO. OF WHEELS 24 WHEEL SIZE 26x6 IN.
TRACK, TYPE T97E2
NO. OF SHOES/TRACK 79 PITCH 6 15/16 IN. WIDTH 28 IN.

ELECTRICAL SYSTEM

NOMINAL VOLTAGE 24 GENERATED VOLTAGE 28
GENERATOR, MAIN, AMPERES 300 MS 51004-1
BATTERY, MS 35000-3 QTY. 4 TYPE 6 TN (DRY)
BATTERY, MS 35000-4 QTY. 4 TYPE 6 TN (WET)
IGNITION SYSTEM (BATTERY) MAGNETO, SCINTILLA QTY. 4
MAGNETO, MS 51333 COIL, MS 51355-1

POWER PACKAGE

ENGINE

TYPE 12 CYLINDER, 90° V AIR COOLED, FUEL INJECTION MS 51313-2
DISPLACEMENT 1791 CU. IN. BORE 5.75 IN. STROKE 5.75 IN.
GOVERNED SPEED 2800 RPM COMPRESSION RATIO 6.5:1
FUEL, GASOLINE RATING 83 OCTANE CAPACITY 335 GAL.

MAX. GROSS HORSEPOWER	810	@ 2800 RPM
MAX. NET HORSEPOWER	604	@ 2800 RPM
MAX. GROSS TORQUE	1600 LB/FT.	@ 2000 RPM
MAX. NET TORQUE	1390 LB/FT.	@ 2000 RPM

MAIN COOLING SYSTEM, AIR ENGINE OIL CAP. 64 QTS
OIL COOLING SYSTEM, ENGINE MOUNTED COOLERS AIR-COOLED WITH ENGINE DRIVEN FANS

POWER TRAIN

TYPE, CROSS DRIVE PART NO. 8348290
HYDRAULIC CONVERTER SINGLE STAGE STALL MULTIPLICATION 4
OVERALL USEABLE RATIO: LOW 13 HIGH 4.5 REV. 18.1
STEERING RATE 9.7 RPM TURNING RADIUS, PIVOT TO INFINITY
STEERING CONTROL MECHANICAL STEERING WHEEL
BRAKES MULTIPLE DISC OPERATION, MECHANICAL FOOT PEDAL
OIL COOLING SYSTEM, ENGINE MOUNTED COOLERS, AIR COOLED WITH ENGINE DRIVEN FANS

FINAL REDUCTION

TYPE, SPUR GEAR RATIO 5.0811 FT./REV. 6.43
SPROCKET PITCH DIA. 24.504 IN. NO. OF TEETH 11

COMMUNICATIONS

RADIO SET AN/GRC-3, 4, 7 OR 8, AN/URC 7 AND AN/VIA-4
RADIO SET AN/GRC-3 OR 7, AN/ARC 27 PLUS AN/VIA-4

FIRE EXTINGUISHER

PART NO. 7714476 FIXED (3) 10 LB. CO_2
PART NO. 7714780 PORTABLE ONE 5 LB. CO_2

PERFORMANCE

GROSS HORSEPOWER TO WEIGHT RATIO 15.7 HP/TON
MAX. TRACTIVE EFFORT 84,000 LBS. TE/W 80%
MAX. SPEED 30 MPH MAX. GRADE 60%
MAX. TRENCH WIDTH CROSSING 102 IN. MAX. VERTICAL WALL 36 IN.
CRUISING RANGE 160 MILES
MAX. FORDING DEPTH 48 IN. W/O KIT 96 IN. W/KIT

THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWING NO. 8750111, COPY OF WHICH MAY BE OBTAINED FROM ARMY TANK-AUTOMOTIVE CENTER, WARREN, MICHIGAN
ATTN: STANDARDIZATION BRANCH

APPROVED 26 AUGUST 1964 REVISED

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. MO (ATAC) Other Cust	TITLE TANK, COMBAT, FULL TRACKED, FLAME THROWER, M67A1	MILITARY STANDARD MS 53080 (MO)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.