FED. SUP CLASS
6140

Reviewer/user information in current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS(FSC Listing) Army- MI O

This standard has been approved by the ELECTRONICS COMMAND Department of the ARMY and is mandatory for use by the Army activity. All other military activities are required to apply this standard where suitable.

APPROVED 10 FEBRUARY 1961 REVISED (A) 28 Jul 61 (B) 5 Mar 62 (C) 5 Jun 68 (D) 7 Dec 68 (E) 5 NOV 75

ELECTRICAL AND PHYSICAL REQUIREMENTS

CLASS	VENTED CELL BATTERY
Voltages	
Nominal	6.0 volts
Final	5.0 volts
Rated capacity	14.0 A.H.
Normal charge rates *	
Start (0.33C5)	4.6 amps
Finish (0.17C5)	2.4 amps
Normal Discharge Rate (0.2C5)	2.8 amps
Weight (max.)	7.0 lbs. oz
Vent Release pressure	6.0 ± 1 psi
Number and type of cells	5 ea. BB-328(

* Charge at starting rate till charging voltage reaches 7.5 V, continue to charge at finishing rate for 4 hrs.

Test	Test Para.	Requirement
Full charge capacity	4.10.1	14.0 A.H.
Low temp. test	4.10.3	
Test II	4.10.3.2	5.6 A.H.
Vibration	4.20	
Low freq.	4.20.1	14.0 A.H.
Mechanical shock	4.16	14.0 A.H.
Cycle life test	4.15	
Test I	4.15.1	1500 cycles
Test II	4.15.2	308 cycles
Retention of charge		
Test I	4.17.1	11.2 A.H.
Test II	4.17.2	5.6 A.H.

CANCELLED AFTER 5 NOV. 75 NO SUPERCEDING DOCUMENT

(D) For changes see Sheets 1, 2 and 3.

P.A. SL Internat'l Interest Other Cust (See Note T2) (D)	TITLE: BATTERY, STORAGE, BB-429/U	MILITARY STANDARD MS 75026 (EL)
Procurement Specification MIL-B-5511B(SIG)	SUPERSEDES:	SHEET 1 OF 3

DD FORM 672 (Coordinated) EDITION OF 1 SEP 57 MAY BE USED.

NOTES TO PRINTER: REDUCE BORDER TO 6.27"x9.3/4". PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8x10" SHEET. PRINT BOTTOM BORDER LINE 3/4 INCH FROM BOTTOM EDGE OF 8x10" SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10" SHEET.


DRAWN BY _____ DATE _____
TYPED BY _____ DATE _____
CHECKED BY _____ DATE _____

Incl 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.

5/5

FED. SUP CLASS 6140

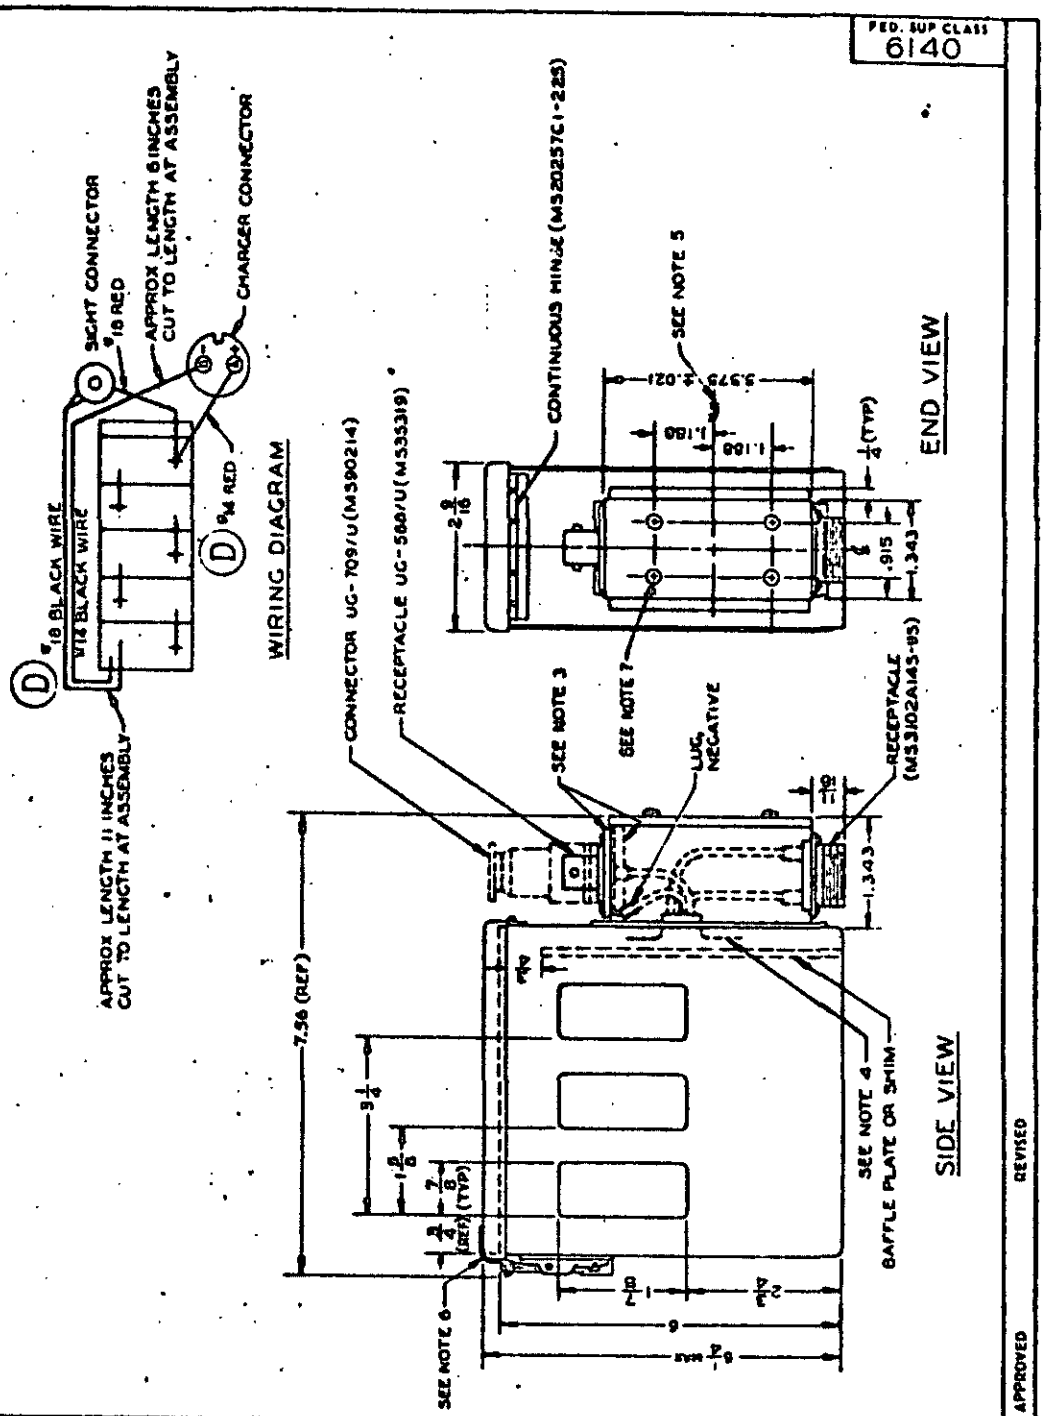

This standard has been approved by the ELECTRONICS COMMAND Department of the Army and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

P.A. EL Other Cust	TITLE BATTERY, STORAGE, BB-429/U	MILITARY STANDARD MS 75026 (EL)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 2 OF 3

DD FORM 672-1 (Coordinated)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

APPROVED REVISED

NOTES TO PRINTER: REDUCE BORDER TO 8-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

DATE


DRAWN BY _____ _____

TYPED BY _____ _____

CHECKED BY _____ _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6140

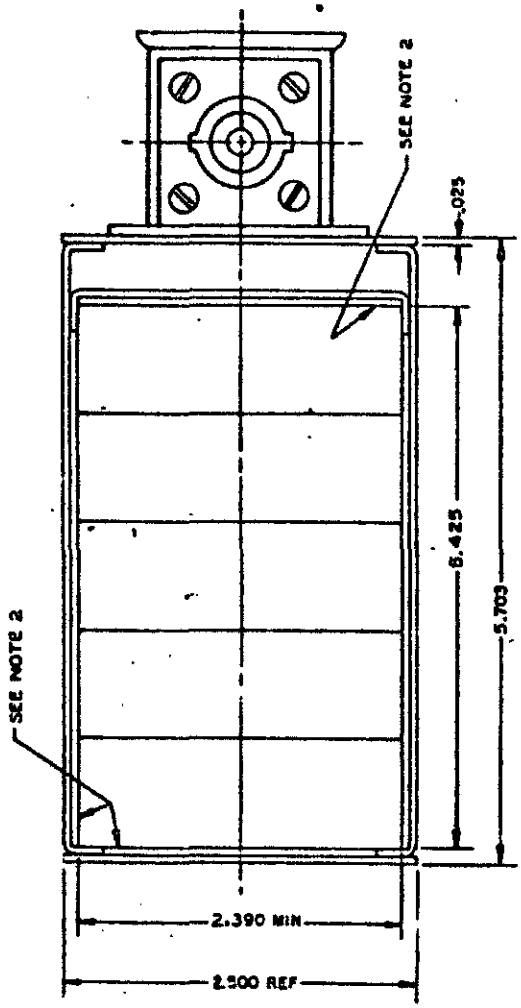

TOP VIEW WITHOUT COVER

NOTES

1. All dimensions are in inches. Unless otherwise specified, tolerances are ± 1/64 on fractions, ±.03 on decimals.
2. Plastic liners for shimming, where required shall conform to specification L-P-512, Type I, Class H, Grade I.
3. Two (2) each plastic insulating bushings shall conform to MIL-M-20693, composition A1, Type I.
4. Polyethylene or rubber grommet.
5. Center of connector box and cover.
6. Cantex fastener 301-2 or equal.
7. Airloc stud P/N 394422-2-440 and pin P/N 394434 or equal.
8. Case material shall be corrosion resisting per QQ-S-766, Class 300 series with a minimum thickness of .025 (24 gage).
9. All surfaces of the case shall be epoxy coated to a minimum thickness of .007 by the fluidized bed method. The epoxy shall be lusterless green color, matching chip No. 34087 per FED STD 595.
10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
11. Referenced documents shall be of the issue in effect on date of invitation for bid.
12. Battery, Storage BB 429/U meets the requirements of NATO STANAG No. 2231. Deviations which affect this STANAG cannot be permitted.

REVISED

APPROVED

P.A. EL Other Cont	TITLE: BATTERY, STORAGE, BB-429/U	MILITARY STANDARD MS 75026 (EL)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 3 OF 3

This standard has been approved by the ELECTRONICS COMMAND Department of the Army and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

DD, FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

DATE

DRAWN BY _____ _____

TYPED BY _____ _____

CHECKED BY _____ _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.