...QUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPEC ...ION
SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN
THE SOLICITATION AMS 7478

THIS ...CATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE
DEPARTM... OF DEFENSE

Form Approved
OMB No 0704-0188

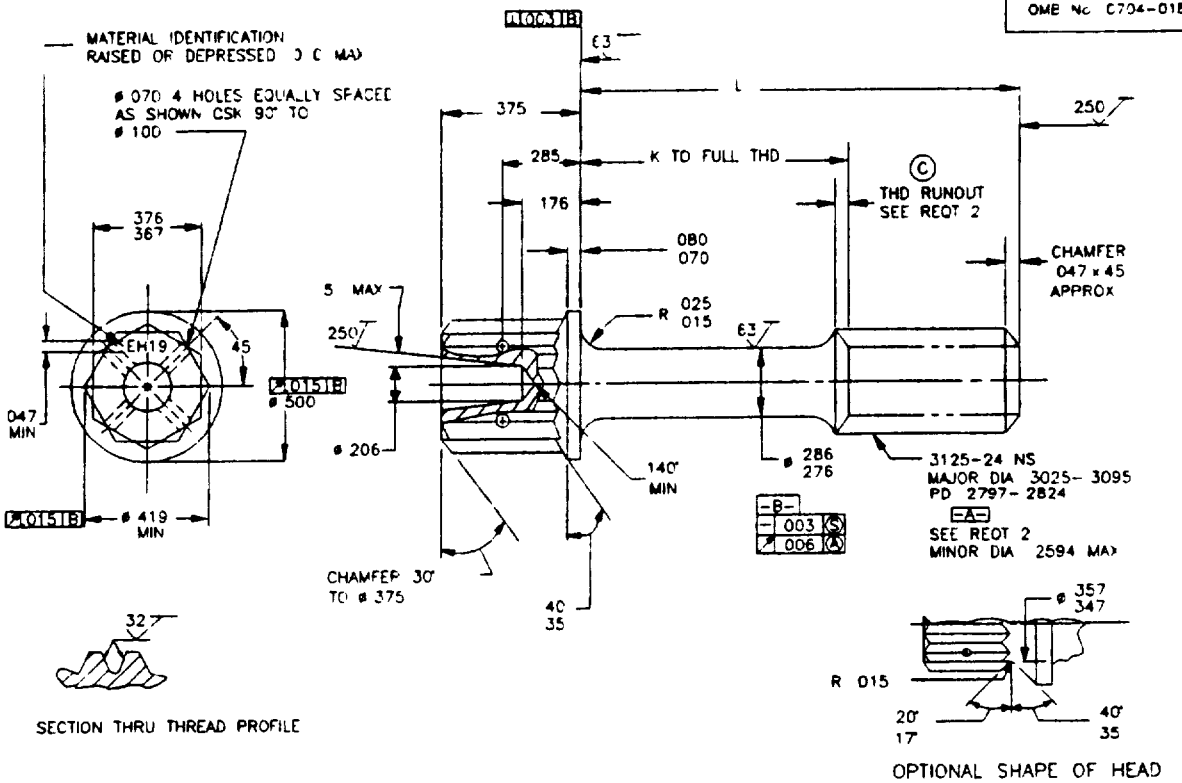



TABLE I DASH NUMBERS AND DIMENSIONS

| DASH NO. MS9062 | L | K +.000 -.060 | APPROX WEIGHT LB/100 |
|---|---|---|---|
| -05 | .562 | 1/ | 2.21 |
| -06 | .625 | 1/ | 2.28 |
| -07 | .688 | 1/ | 2.39 |
| -08 | .750 | 1/ | 2.51 |
| -09 | .812 | 1/ | 2.62 |
| -10 | .875 | 1/ | 2.73 |
| -11 | .938 | 1/ | 2.85 |
| -12 | 1.000 | .125 | 2.96 |
| -13 | 1.062 | .188 | 3.07 |
| -14 | 1.125 | .250 | 3.19 |
| -15 | 1.188 | .312 | 3.30 |
| -16 | 1.250 | .375 | 3.41 |
| -17 | 1.312 | .438 | 3.52 |
| -18 | 1.375 | .500 | 3.64 |
| -19 | 1.438 | .562 | 3.75 |
| -20 | 1.500 | Ⓒ .625 | 3.87 |
| -21 | 1.562 | Ⓒ .688 | 3.98 |
| -22 | 1.625 | .750 | 4.10 |
| -23 | 1.688 | .812 | 4.22 |
| -24 | 1.750 | .875 | 4.33 |
| -25 | 1.875 | 1.000 | 4.55 |
| -26 | 2.000 | 1.125 | 4.77 |
| -27 | 2.125 | 1.250 | 5.00 |
| -28 | 2.250 | 1.375 | 5.23 |
| -29 | 2.375 | 1.500 | 5.45 |
| -30 | 2.500 | 1.625 | 5.67 |
| -31 | 2.625 | 1.750 | 5.90 |
| -32 | 2.750 | 1.875 | 6.13 |
| -33 | 2.875 | 2.000 | 6.36 |
| -34 | 3.000 | 2.125 | 6.58 |
| -35 | 3.125 | 2.250 | 6.80 |
| -36 | 3.250 | 2.375 | 7.03 |
| -37 | 3.375 | 2.500 | 7.27 |
| -38 | 3.500 | 2.625 | 7.50 |
| -39 | 3.625 | 2.750 | 7.73 |
| -40 | 3.750 | 2.875 | 7.95 |
| -41 | 3.875 | 3.000 | 8.17 |
| -42 | 4.000 | 3.125 | 8.40 |
| -43 | 4.125 | 3.250 | 8.63 |
| -44 | 4.250 | 3.375 | 8.86 |
| -45 | 4.375 | 3.500 | 9.08 |
| -46 | 4.500 | 3.625 | 9.30 |
| -47 | 4.625 | 3.750 | 9.52 |
| -48 | 4.750 | 3.875 | 9.74 |
| -49 | 4.875 | 4.000 | 9.95 |
| -50 | 5.000 | 4.125 | 10.17 |
| -51 | 5.125 | 4.250 | 10.40 |
| -52 | 5.250 | 4.375 | 10.63 |
| -53 | 5.375 | 4.500 | 10.86 |
| -54 | 5.500 | 4.625 | 11.10 |
| -55 | 5.625 | 4.750 | 11.33 |
| -56 | 5.750 | 4.875 | 11.56 |
| -57 | 5.875 | 5.000 | 11.78 |
| -58 | 6.000 | 5.125 | 12.00 |

1/ THREAD TO HEAD MAXIMUM TWO INCOMPLETE THREADS

INACTIVE FOR NEW DESIGN
AFTER 31 DEC 1963

Ⓒ DENOTES CHANGES

INCH-POUND

| | | |
|---|---|---|
| PREPARING ACTIVITY DLA-IS<br>CUSTODIANS NAVY- AS ARMY- AV<br>AIRFORCE- 99<br>REVIEW 82<br>PROJECT NUMBER 5306-1805 | MILITARY SPECIFICATION SHEET<br>TITLE<br>BOLT, MACHINE-DOUBLE HEXAGON, EXTENDED WASHER HEAD, CORROSION AND HEAT RESISTANT STEEL, DRILLED, 3125-24 NS | SPECIFICATION SHEET NUMBER<br>MS9062 27 SEP 94 REV C<br>SUPERSEDING<br>MS9062B 8 AUG 86<br>AMSC- N/A FSC 5306 |

DISTRIBUTION STATEMENT
A Approved for public release distribution is unlimited



DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION AMS 7478

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

REQUIREMENTS

(C) 1 MATERIAL. CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5732

(C) 2 THREADS. THREADS IN ACCORDANCE WITH MIL-S-7742 THREAD RUNOUT IN ACCORDANCE WITH AS 3062 INCOMPLETE THREADS NOT TO ENTER FILLET

3 DIMENSIONING AND TOLERANCING. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

(C) 4 FLUORESCENT PENETRANT INSPECTION. FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645

(C) 5 SURFACE TEXTURE. SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD IN ACCORDANCE WITH ANSI/ASME B46 1

9 TOLERANCE. UNLESS OTHERWISE SPECIFIED TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ± 010 ANGULAR DIMENSIONS ± 5

10 EDGES. BREAK SHARP EDGES 003- 015 UNLESS OTHERWISE SPECIFIED

11 PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS9062-06
- 06 — DASH NUMBER
- MS9062 — BASIC MS NUMBER

(C) MS9062-06 INDICATES BOLT MACHINE CRES DOUBLE HEXAGON EXTENDED WASHER HEAD DRILLED 3125-24 NS LENGTH 625 INCHES

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 DO NOT USE UNASSIGNED PART NUMBERS

(C) 3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE

(C) 4 UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION

5 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6 AS AND AMS ARE SAE PUBLICATIONS

| | | |
|---|---|---|
| PREPARING ACTIVITY DLA-IS<br>CUSTODIANS NAVY- AS ARMY- AV<br>AIRFORCE- 99<br>REVIEW 82<br>PROJECT NUMBER 5306-1805 | MILITARY SPECIFICATION SHEET<br>TITLE<br>BOLT, MACHINE-DOUBLE HEXAGON EXTENDED WASHER HEAD, CORROSION AND HEAT RESISTANT STEEL DRILLED, 3125-24 NS | SPECIFICATION SHEET NUMBER<br>MS9062 27 SEP 94 REV C<br>SUPERSEDING<br>MS9062B 8 AUG 86<br>AMSC- N/A FSC 5306 |
| DISTRIBUTION STATEMENT<br>A Approved for public release distribution is unlimited | | Page 2 of 2 |

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.