FED. SUP CLASS
5306

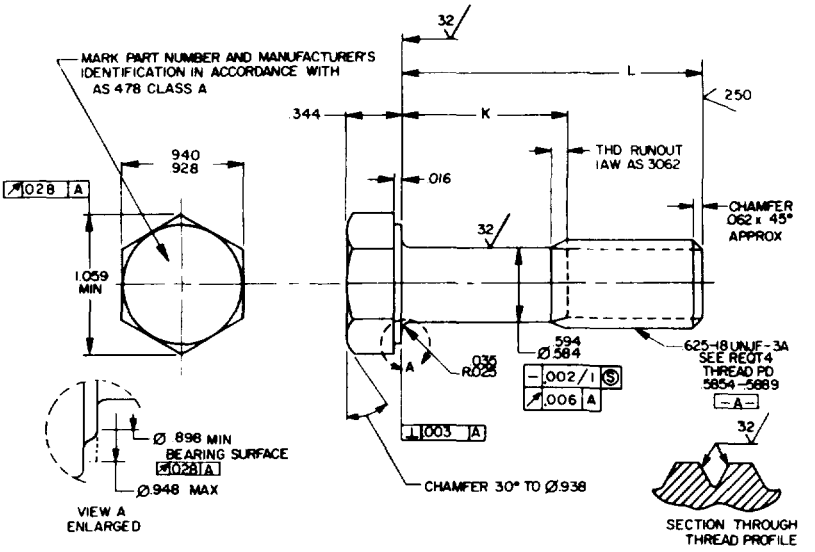


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-03	.938	.118- .138	14.53
-04	1.000	.118- .138	15.01
-05	1.062	.118- .138	15.49
-06	1.125	.118- .138	15.97
-07	1.188	.118- .138	16.45
-08	1.250	.118- .138	16.93
-09	1.312	.118- .138	17.41
-10	1.375	.118- .138	17.89
-11	1.438	.118- .138	18.36
-12	1.500	.118- .138	18.84
-13	1.562	.118- .138	19.32
-14	1.625	.118- .138	19.80
-15	1.688	.128- .188	20.28
-16	1.750	.190- .250	20.76
-17	1.812	.252- .312	21.24
-18	1.875	.315- .375	21.71
-19	2.000	.440- .500	22.67
-20	2.125	.565- .625	23.63
-21	2.250	.690- .750	24.59
-22	2.375	.815- .875	25.54
-23	2.500	.940-1.000	26.50
-24	2.625	1.065-1.125	27.46
-25	2.750	1.190-1.250	28.41
-26	2.875	1.315-1.375	29.37
-27	3.000	1.440-1.500	30.33
-28	3.125	1.565-1.625	31.28
-29	3.250	1.690-1.750	32.24
-30	3.375	1.815-1.875	33.20

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-31	3.500	1.940-2.000	34.16
-32	3.625	2.065-2.125	35.11
-33	3.750	2.190-2.250	36.07
-34	3.875	2.315-2.375	37.03
-35	4.000	2.440-2.500	37.98
-36	4.125	2.565-2.625	38.94
-37	4.250	2.690-2.750	39.90
-38	4.375	2.815-2.875	40.86
-39	4.500	2.940-3.000	41.81
-40	4.625	3.065-3.125	42.77
-41	4.750	3.190-3.250	43.73
-42	4.875	3.315-3.375	44.68
-43	5.000	3.440-3.500	45.64
-44	5.125	3.565-3.625	46.60
-45	5.250	3.690-3.750	47.55
-46	5.375	2.815-3.875	48.51
-47	5.500	3.940-4.000	49.47
-48	5.625	4.065-4.125	50.43
-49	5.750	4.190-4.250	51.38
-50	5.875	4.315-4.375	52.34
-51	6.000	4.440-4.500	53.30

Ⓐ ENTIRE STANDARD REVISED

APPROVED 2 FEB 68 REVISED Ⓐ 22 MAY 86

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust ARMY-AV AIR FORCE-99		BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .625-18UNJF-3A	MS9525
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0989

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL: IN ACCORDANCE WITH AMS 6322-80.
2. PROTECTIVE COATING AND SURFACE TREATMENT: CADMIUM PLATE IN ACCORDANCE WTIH AMS 2400-80. DIMENSIONS SPECIFIED ARE AFTER PLATING.
3. HARDNESS: 26-32 HRC.
4. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879.
5. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. HEAD TO SHANK FILLET: HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS EXCEPT DASH NUMBER SIZES -16 AND SMALLER.
8. TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS $\pm$.010, ANGULAR DIMENSIONS $\pm 5^{\circ}$.
9. MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83.
10. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9525-03

- MS9525 — BASIC MS NUMBER
- -03 — DASH NUMBER

MS9525-03 INDICATES - BOLT, MACHINE, HEXAGON HEAD, .625-18 UNJF-3A, LENGTH .938.

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 2 FEB 68 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:
REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. NAVY-AS Other Cust ARMY-AV AIR FORCE-99	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .625-18 UNJF-3A	MILITARY STANDARD MS 9525
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.