MIL-B-3621B

10 January 1968

SUPERSEDING
MIL-B-3621A
24 September 1963

MILITARY SPECIFICATION

BLANKET, DOG

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for a felt-lined cotton duck dog blanket (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

C-F-206	-	Felt, Sheet, Wool, Pressed
V-T-285	-	Thread, Polyester
CCC-C-419	-	Cloth, Duck, Cotton; Unbleached, Plied-Yarns (Army and Numbered)
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage (General Use)
DDD-T-86	-	Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed)
PPP-B-636	-	Box, Fiberboard
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

FSC 3770

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-496 - Clips, End Strap
MIL-W-530 - Webbing and Tape, Textile, Cotton, General Purpose, Natural or in Colors
MIL-B-543 - Buckles, Tongueless and Web Strap
MIL-F-10884 - Fasteners, Snap

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWING

ARMY NATICK LABORATORIES

1-10-34 - Blanket, Dog - Assembly Complete

(Figure 1 is a miniature reproduction of Drawing 1-10-34, and is attached for information only).

(Copies of specifications, standards, and drawing required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample.- Unless otherwise specified (see 6.2), before production is commenced, a sample of the item covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacutre of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

3.2 Materials.-

3.2.1 Cloth, duck, cotton.- The cloth shall conform to type III, 8.25 ounces per square yard of CCC-C-419.

3.2.1.1 Color and treatment.- The cotton duck shall conform to type I, class A of CCC-D-950, shade olive drab No. 7.

3.2.2 Felt, wool.- The lining fabric shall conform to type III, class 9A2 of C-F-206.

3.2.3 Tape, textile, cotton.- The tape for reinforcement and binding shall conform to type I, class 3 of DDD-T-86, 1/2 and 1-inch widths, shade olive drab No. 7.

3.2.4 Webbing, textile, cotton.- The webbing for chest and body adjustment straps shall conform to type IIb, class 8 of MIL-W-530, 5/8 and 1-1/2-inch widths, shade olive drab No. 7.

3.2.5 Buckles, double bar with slider.- The buckles shall conform to type III, style 3, class 3, sizes 5/8 and 1-1/2-inches of MIL-B-543.

3.2.6 Clips, end.- The end clips shall conform to type I, class 1, sizes 5/8 and 1-1/2 inches, of MIL-C-496.

3.2.7 Fasteners, snap.- The snap fasteners shall conform to style 2, finish 2 of MIL-F-10884 consisting of button, 24 line, size 1 and socket (male component); stud, and eyelet, size 1 (female component).

3.2.8 Thread, polyester.- The thread for all stitching shall conform to type I or II, class 1, sub-class A, size E of V-T-285. The thread shall be dyed shade S-1 (Cable No. 66022) and shall show fastness to weathering equal to or better than the standard shade sample (see 6.3). If no standard sample is available, the thread shall show good fastness to weathering.

3.3 Construction.- The construction shall conform in all respects to Drawing 1-10-34 and as specified herein.

3.3.1 Stitching, machine.-

3.3.1.1 Stitching.- All stitching shall conform to type 301 of Fed. Std. No. 751, 5 to 7 stitches per inch.

3.3.1.2 Thread breaks.- Thread breaks in stitching shall be overstitched not less than 1-inch at each break.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

3.3.1.3 Stitching ends.- Stitching ends shall be overstitched not less than 1-inch at the ends except where ends are turned under in a hem, held down by other stitching, or, where stitching is performed automatically. When stitch patterns such as box, box with cross-stitch, "W" stitching or straight line tacking are performed automatically, at least three or more tying, overlapping or back stitches shall be used to secure the ends of stitching.

3.3.1.4 Skipped stitches.- Two or more skipped stitches occuring consecutively shall be overstitched not less than 1 inch.

3.3.2 Setting of end clips.- The webbing shall be inserted the full depth of the clips. The clips shall be securely attached without cutting the webbing which shall lie flat at the point of entrance.

3.3.3 Setting of snap fasteners.- If a hole is punched before inserting the male or female part of the fastener, it shall be smaller than the outside diameter of the fastener tube so that the tube must be forced through the hole. The fasteners shall be securely clinched.

3.4 Marking.- All markings shall conform to DDD-L-20.

3.4.1 The letters "US", on the dog blanket, shall conform to type IV, class 9, in the size characters and in the location shown on the drawing. Class 9 markings shall be clearly legible after subjection to accelerated weathering. Fastness of class 9 markings shall be as specified for class 5 marking.

3.4.2 Identification label.- The identification label shall be stitched to the blanket in the location shown on the drawing and shall conform to type II, class 5.

3.5 Workmanship.- Cloth components shall be clean and free of holes, cuts, tears or cloth defects such as multiple floats, broken or missing yarns. Webbing and tapes shall contain no frayed or scalloped edges. Thread tension shall be maintained so that there will be no loose stitching and seam allowances shall be maintained with seams properly sewed so that no runoffs, twists, pleats or open seams shall result. Care shall be taken in sewing so that there shall be no needle chews. All thread ends shall be trimmed to 1/2 inch or less. Metal components shall be free of burrs, sharp edges, corroded areas and shall not be broken or malformed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection.- When a preproduction sample is required, it shall be examined for defects listed in table I and dimensions specified.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawing and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 Process inspection.- Inspection shall be made to determine that holes punched to receive male or female parts of snap fasteners are in compliance with 3.3.3. Whenever nonconformance is noted, correction shall be made to the items affected and the process.

4.3.3 End product inspection.- A lot shall consist of all completely fabricated dog blankets offered for inspection at one time. The sample unit shall be one completely fabricated dog blanket. The inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.3.3.3.

4.3.3.1 Visual examination.- The completely fabricated blanket shall be examined for defects in table I.

TABLE I.- Classification of defects for visual characteristics.

Examine	Defect	Classification Major	Minor A	Minor B
Fabric	Hole, cut, or tear	X		
	Any broken or missing yarn, multiple floats clearly visible at normal inspection distance (approximately 3 feet)		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics. (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Webbing and Tape	Edge frayed or scalloped		X	
Hardware (general)	Broken	X		
	Malformed:			
	- fails to perform intended function	X		
	- but will perform intended function		X	
	Corroded area			X
	Burr or sharp edge which may cause injury in handling or damage to fabric	X		
Buckles	Not assembled to strap as specified, i.e., reversed, failing to effect a secure fastening of straps	X		
End clips	Not securely clinched; webbing not flat at point of insertion			X
	Clinched excessively tight (cutting webbing)		X	
Seams and stitching	Open seams on stitch type 301:			
	1-inch or less			X
	more than 1-inch	X		
	Run-offs on stitch type 301 (see open seams)			
Note:	A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutively skipped or run-off stitches occur not over-stitched. On double stitched seams, a seam shall be classified as open when either one or both sides of a seam are open.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics. (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Raw edges caught in stitching (when turnunder is required): more than 1-inch, but not more than 3-inches			X
	more than 3-inches		X	
	Note: Raw edges not caught in stitching shall be classified as open seams.			
	Thread breaks overstitched less than 1-inch			X
	Skipped stitches overstitched less than 1-inch			X
	Note: Thread breaks or skipped stitches not overstitched shall be classified as open seams.			
	Needle chews resulting in cut, tear, or hole longer than 1/8-inch in length, or larger than 1/8-inch in diameter	X		
	One or more required row of stitching omitted (except on boxstitching)	X		
Boxstitching	Incomplete:			
	One row of stitching omitted			X
	Two or more rows of stitching omitted.	X		
Stitching ends	Overstitched less than 1-inch (except where ends are held down by other stitching, turned under in a hem, or where stitching is performed automatically).		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics. (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Stitching ends (cont'd)	Secured with less than 3 tying, overlapping or backstitches when automatic stitching is performed		X	
Seam type	Wrong seam type	X		
	Seam pleated			X
Stitch type	Wrong stitch type	X		
Stitch tension	Loose, resulting in an exposed bobbin or top thread			X
	Tight, as evidenced by puckering on seams		X	
Stitches per inch	Less than minimum specified: one stitch			X
	two or more		X	
	One or more stitches in excess of maximum specified	X		
Note:	Variation in the number of stitches per inch, caused by the operator speeding up the machine in order to sew over heavy places or in turning corners, shall be classified as follows:			
	a. Within the minor "A" defect classification - minor B defect			
	b. Within the minor "B" defect classification - no defect			

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics. (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Stitching margin	Larger than specified by more than 3-inch:			
	for less than 4-inches in length			X
	for 4-inches or more in length		X	
Stitching ends	Overstitched less than 1-inch on stitch type 301 (except where ends are held down by other stitching or turned under in a hem or where stitching is performed automatically)			X
	Secured with less than three tying, overlapping or backstitches when automatic stitching is performed			X
Components and assembly	Any component not fabricated of applicable referenced material	X		
Binding	Not attached or stitched as specified on Drawing 1-10-34.			X
Marking	Omitted, incorrect, illegible or misplaced.			X
Cleanness	Grease or oil stains. Thread ends not trimmed to 1/2 inch or less			X

4.3.3.2 Dimensional examination.- Examination shall be made of the blanket for dimensional characteristics. Any dimension not within the specified tolerances shall be classified as a defect.

4.3.3.3 Inspection levels and AQL's.- The inspection levels and AQL's, expressed in terms of defects per hundred units, shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

Examination	Inspection levels	AQL's
For defects applicable to table I	II	4.0 Major 10.0 Major and Minor A defects 25.0 Totals. Major, Minor A and B defects combined
For defects applicable to 4.3.3.2.	S-3	10.0 One class

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements are in compliance with section 5 of this specification. Defects shall be scored in accordance with table II. The sample unit shall be one completely wrapped blanket, fully prepared for delivery. The lot shall be the number of completely wrapped blankets offered for inspection at one time. The inspection level shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units.

TABLE II.- Examination of preparation for delivery.

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Material	Any component missing or damaged
Workmanship	Blanket improperly folded
	Bulging or distortion of containers
	Open and noncontinuous heat sealed seams and closure of polyethylene bags
Content	Number per container is more or less than required

4.3.5 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination of defects in closure and strapping shall be in accordance with that specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each blanket shall be neatly folded in such a manner that the buckles are positioned inside the folds. The blanket shall then be placed in a close-fitting, clear polyethylene film bag of 0.0015-inch thickness (+ 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be sealed with the heat seal made as close as possible to the open end. Prior to or during the closure operation, excess air within the bag shall be expelled.

5.1.2 Level C.- Blankets shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.- Forty blankets, packaged as specified in 5.1, shall be packed in a close-fitting fiberboard box conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each box shall be fitted with a taped liner conforming to V3c of PPP-B-636. Level A packages shall be uniformly arranged in the box to form a balanced pack. Each shipping container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the box specifications.

5.2.2 Level B.- Forty blankets, packaged as specified in 5.1, shall be packed in a close-fitting fiberboard box conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each box shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Level A packages shall be uniformly arranged in the box to form a balanced pack. Each shipping container shall be closed in accordance with method II as specified in the appendix of the box specification.

5.2.2.1 When specified, (see 6.2), the shipping container shall be V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

5.2.3 Level C.- Blankets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required information legibly printed, or stamped in black, directly on the bag, across the center face on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NO.

NOMENCLATURE

QUANTITY

6. NOTES

6.1 Intended use.- The blanket covered by this specification is used to provide protection for dogs in cold weather.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Stock number.
(c) When preproduction number is not required (see 3.1).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When V-board grade shipping containers are required for level B shipments.

6.3 For access to a standard shade sample of thread, address the procuring office issuing the invitation for bids.

Custodians:

Army - GL
Air Force - 84

Review activities:


Army - MD, ME
Air Force - 84

Preparing activity:

Army - GL

Project No. 3770-0076

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

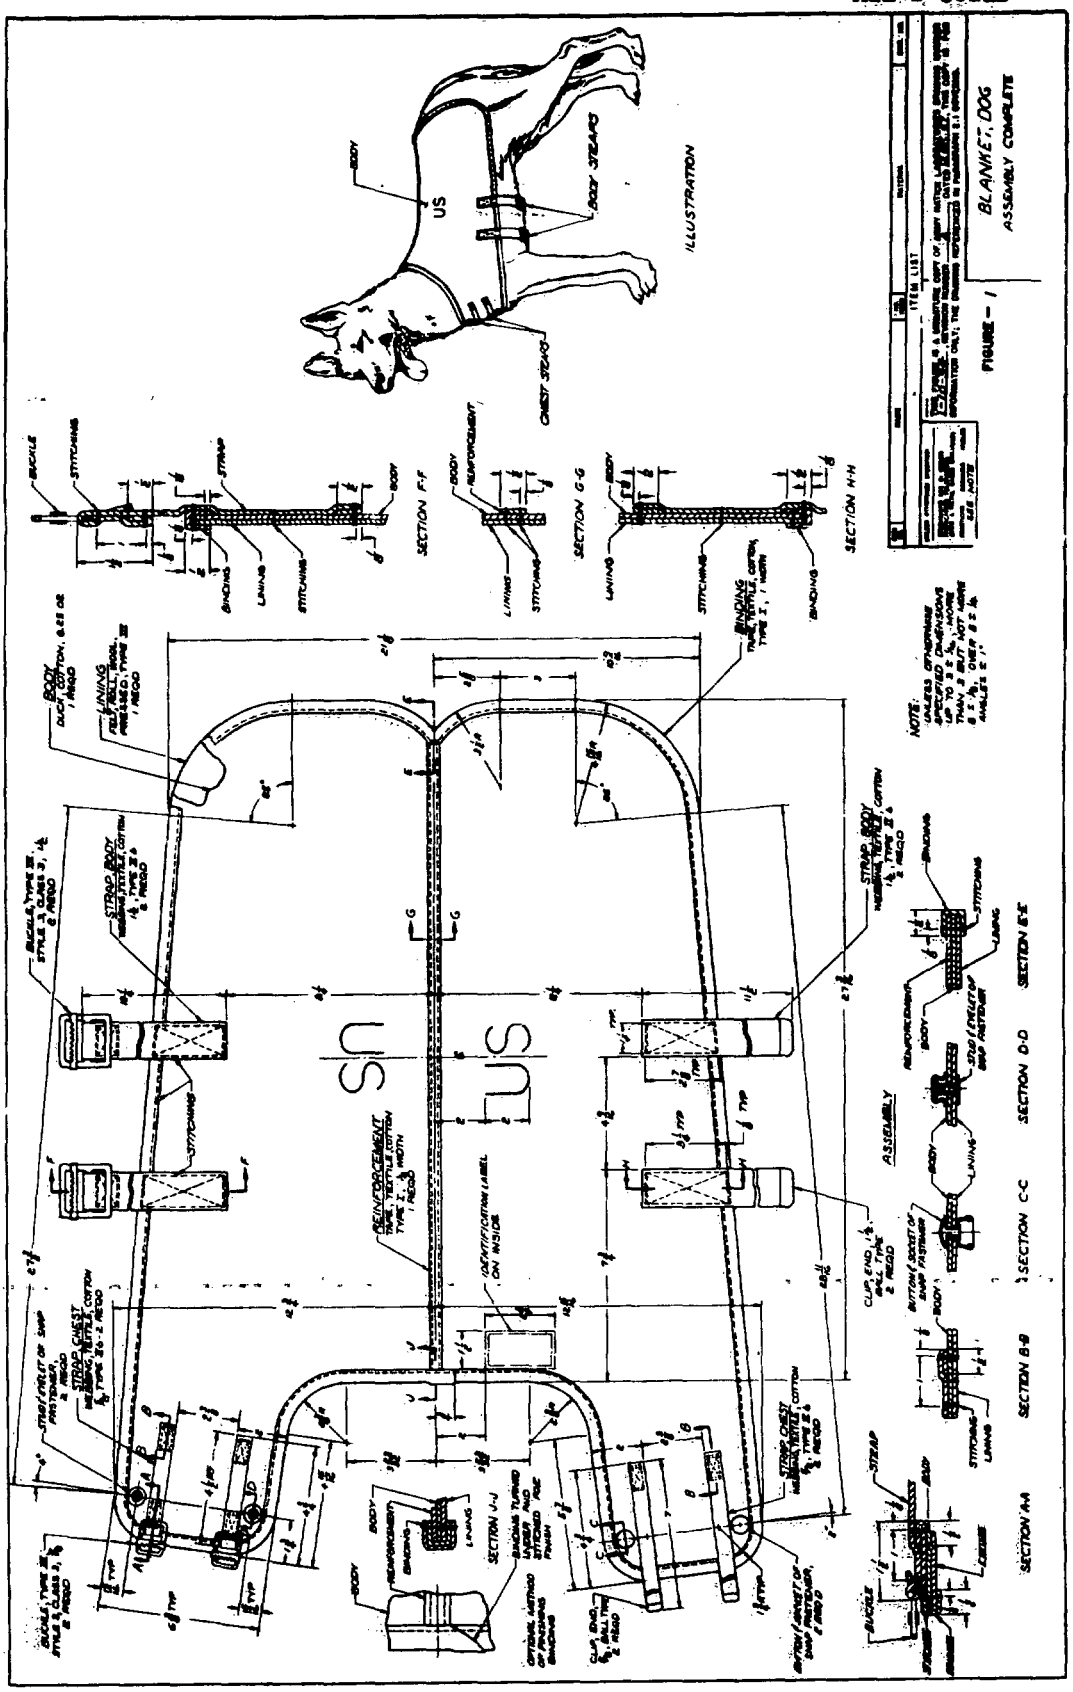

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Blanket, Dog MIL-B-3621B

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:40Z
Check the source to verify that this is the current version before use.