MILITARY SPECIFICATION

CONNECTOR ADAPTER, SERIES PULSE, TYPE UG-222B/U

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers the detail requirements for type UG-222B/U series pulse connector adapter. The Military part number for type UG-222B/U connector is M3607/10-01.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY
MIL-C-3607 - Connectors, Coaxial, Radiofrequency, Series Pulse, General Specification for.

DRAWINGS

BUREAU OF SHIPS
REA10477 - Rivet.
REA10484 - Contact.
REA10518 - Cap.
REB10021 - Gasket.
REB10333 - Body.
REB10503 - Insulator.
REB10519 - Lock Ring.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements.- Requirements shall be in accordance with MIL-C-3607, and as specified herein.

3.2 Design and construction.- The connector adapter shall be of the design, construction, and physical dimensions specified on figure 1.

4. QUALITY ASSURANCE PROVISIONS


4.1 Sampling and inspection.- Sampling and inspection shall be in accordance with MIL-C-3607, and as specified herein.

4.1.1 Group B inspection.- Group B inspection shall be in accordance with MIL-C-3607. Mating dimensions shall be as specified on figure 2.

4.2 Leakage. The leakage test is not applicable.

4.3 Dielectric withstanding voltage.- The test voltage for the dielectric-withstanding-voltage-test shall be 18,000 volts, root mean square.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.

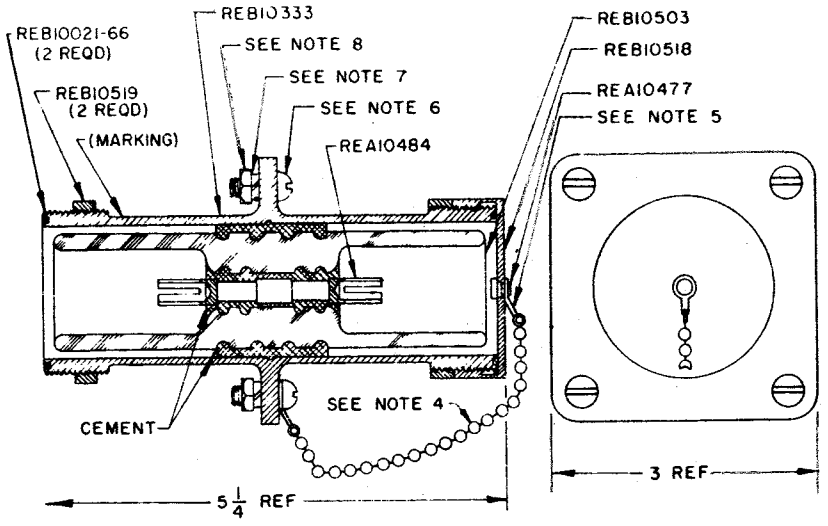

ASSEMBLY

NOTES:

1. All dimensions in inches.
2. Tolerances are ±1/64 on fractions.
3. Contact, REA10484, shall have a silver plating of not less than 0.0002 inch thick. All other metal parts shall be nickel plated.
4. The bead chain shall be #10 x 4 inches long supplied by the Bead Chain Manufacturing Co, or equal.
5. The coupling shall be type A supplied by the Bead Chain Manufacturing Co, or equal; two required.
6. The screw shall be #10-24 UNC-2A x 3/4 inch long round-head machine screw.
7. The lockwasher shall be #10.
8. The hex nut shall be #10-24 UNC-2B.

Figure 1 - Type UG-222B/U Connector adapter (Military Part No. M3607/10-01).

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-3607.


6. NOTES

6.1 Notes.- In addition to the notes specified herein, the notes specified in MIL-C-3607 are applicable to this specification.

6.2 Intended use.- Connector adapter, type UG-222B/U, is designed to mate with radiofrequency electrical plug connectors, type UG-36/U and UG-174/U.

6.3 This specification covers the design of connector adapter, type UG-222B/U, which was previously covered by Drawing REB48189.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T18:38Z
Check the source to verify that this is the current version before use.

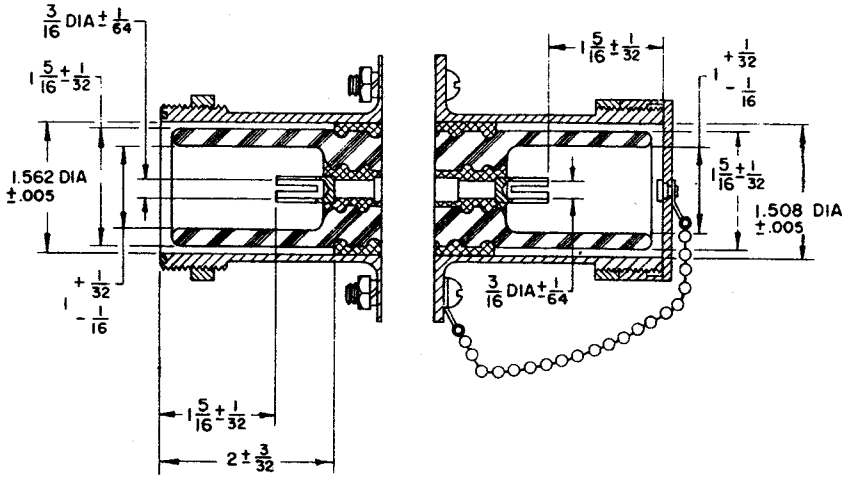

ALL DIMENSIONS IN INCHES

Figure 2 - Dimensional requirements for group B inspection.

Custodians:
Army - EL
Navy - Ships
Air Force - ASD

Preparing activity:
Navy - Ships
(Project 5935-0933)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.