MILITARY SPECIFICATION

# CONNECTOR ADAPTER, SERIES PULSE, TYPE UG-336A/U

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

## 1. SCOPE

1.1 This specification covers the detail requirements for type UG-336A/U series pulse connector adapter. The Military part number for type UG-336A/U connector is M3607/12-01.

## 2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY
MIL-C-3607 - Connectors, Coaxial, Radiofrequency, Series Pulse, General Specification for.

DRAWINGS

BUREAU OF SHIPS
REA10037 - Washer.
REA10472 - Bushing.
REA10488 - Spacer.
REA10489 - Contact.
REA10517 - Coupling Nut.
REB10021 - Gasket.
REB10039 - Washer.
REB10082 - Contact.
REB10455 - Body.
REB10458 - Body.
REB10483 - Bushing.
REB10495 - Contact.
REB10515 - Body and Insulator Assembly.
REB10521 - Nut.
REB10522 - Coupling Nut.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Requirements.- Requirements shall be in accordance with MIL-C-3607, and as specified herein.

3.2 Design and construction.- The connector adapter shall be of the design, construction, and physical dimensions specified on figure 1.


## 4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection.- Sampling and inspection shall be in accordance with MIL-C-3607, and as specified herein.

4.2 Leakage. The leakage test is not applicable.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.

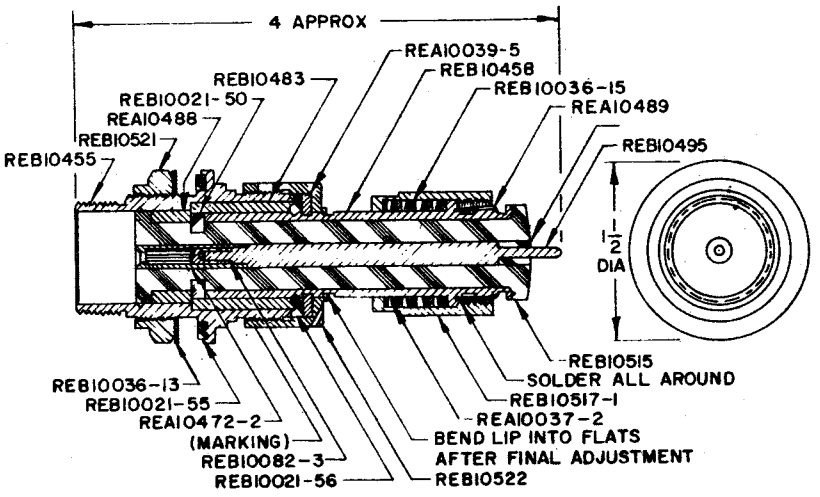


ASSEMBLY

NOTES:
1. All dimensions in inches.
2. Tolerances are ±1/64 on fractions.
3. Bushing, REA10472-2, shall not be plated. Contact, REB10082-3, shall have a silver plating of not less than 0.0002 inch thick. All other metal parts shall have a tin plating of not less than 0.0002 inch thick.

**Figure 1 - Type UG-336A/U connector adapter (Military Part No. M3607/12-01).**

4.3 Dielectric withstanding voltage.- The test voltage for the dielectric-withstanding-voltage-test shall be 9,000 volts, root mean square.

## 5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-3607.

## 6. NOTES

6.1 Notes.- In addition to the notes specified herein, the notes specified in MIL-C-3607 are applicable to this specification.

6.2 Intended use.- Connector adapter, type UG-336A/U, is designed to mate with radiofrequency electrical plug connector, type UG-180A/U, and radiofrequency electrical receptacle connector, type UG-18A/U.

6.3 This specification covers the design of connector adapter, type UG-336A/U, which was previously covered by Drawing REB49186.

Custodians:
Army - EL
Navy - Ships
Air Force - ASD

Preparing Activity:
Navy - Ships
(Project 5935-0934)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.