MILITARY SPECIFICATION

# CONNECTOR, RECEPTACLE, ELECTRICAL, SERIES PULSE, TYPE UG-350/U

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

## 1. SCOPE

1.1 This specification covers the detail requirements for type UG-350/U series pulse, electrical receptacle connector. The Military part number for type UG-350/U connector is M3607/13-01.

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY
MIL-C-3607 - Connectors, Coaxial, Radiofrequency, Series Pulse, General Specification for.

DRAWINGS

BUREAU OF SHIPS
REA10493 - Contact.
REA10501 - Insulator.
REB10021 - Gasket.
REB10032 - Nut.
REB10036 - Washer.
REB10075 - Nut.
REB10466 - Body.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Requirements.- Requirements shall be in accordance with MIL-C-3607, and as specified herein.

3.2 Design and construction.- The electrical receptacle connector shall be of the design, construction, and physical dimensions specified on figure 1.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection.- Sampling and inspection shall be in accordance with MIL-C-3607, and as specified herein.


4.1.1 Group B inspection.- Group B inspection shall be in accordance with MIL-C-3607. Mating dimensions shall be as specified on figure 2.

4.2 Leakage.- The leakage test is not applicable.

4.3 Dielectric withstanding voltage.- The test voltage for the dielectric-withstanding-voltage-test shall be 9,000 volts, root mean square.




Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.

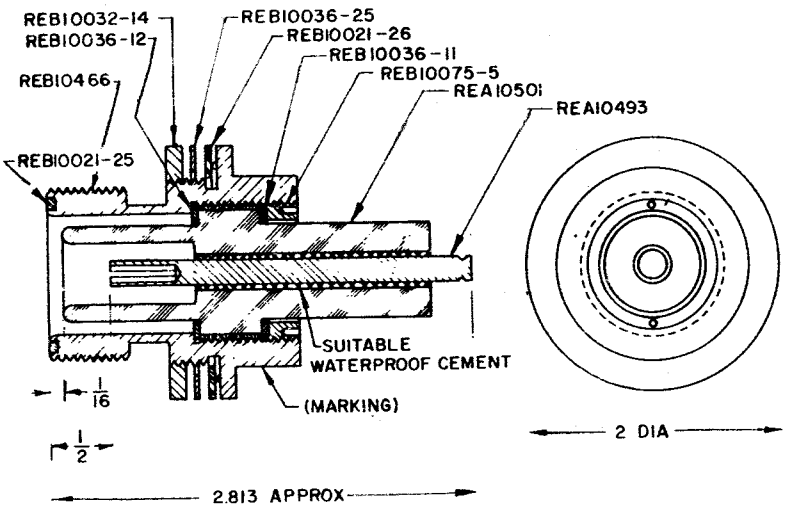


ASSEMBLY

NOTES:
1. All dimensions in inches.
2. Tolerances are ±0.005 on decimals.
3. Contact REA10493 shall have a silver plating of not less than 0.0002 inch thick. All other metal parts shall be nickel plated.

Figure 1 - Type UG-350/U electrical receptacle connector (Military Part No. M3607/13-01).

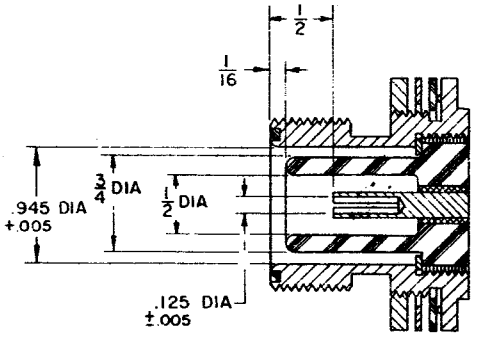


1. All dimensions in inches.
2. Tolerances shall be ±1/64 on fractions.

Figure 2 - Dimensional requirements for group B inspection.

## 5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-3607.

## 6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-C-3607 are applicable to this specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.

6.2 Intended use.- Electrical receptacle connector, type UG-350/U, is designed for use with radio-frequency pulse cables.

6.3 This specification covers the design of electrical receptacle connector, type UG-350/U, which was previously covered by Drawing REB49205.

Custodians:
Army - EL
Navy - Ships
Air Force - ASD

Preparing activity:
Navy - Ships
(Project 5935-0935)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.